MONO

The power output shall not be less than 97%of the minimum power output stated in the product data sheet in the first year of the product’ s life cycle. The loss of power output shall not exceed 0.68% per year thereafter, ending with 80.68% in the 25th year.

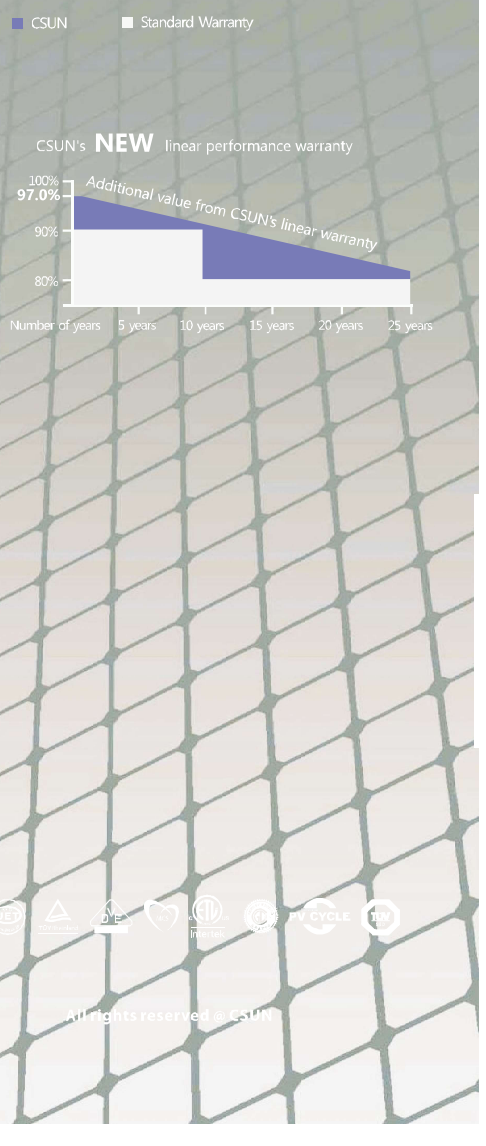

CSUN
energy for today

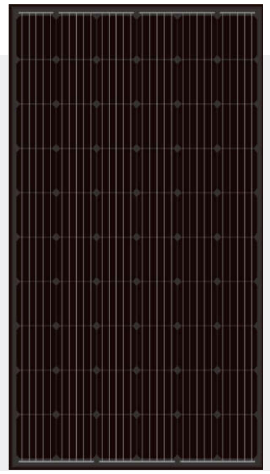

CSUN315-60MM5BB

The Large Scale Project Solution

CSUN315-60MM5BB
CSUN305-60MM5BB
CSUN295-60MM5BB
CSUN310-MM5BB
CSUN300-MM5BB

19.40%
Module efficiency

315W
Highest power output

10years
Material & Workmanship warranty

25years
Linear power output warranty

- PID-free
- World class mono efficiency
- Tighter porduct performance distribution and current sorting reduces the mismatch power loss in system operation
- Positive tolerance offer
- Good temperature coefficient enables higher output in high temperature regions
- Excellent performance under low light conditions
- Certified for salt/ammonia corrosion resistance
- Load certificates: wind to 2400Pa and snow to 5400Pa

- CSUN designs, manufactures and delivers high efficient solar cells and modules to the world from its production centers based in China, USA, Turkey, South Korea and Vietnam.
- Founded in 2004, CSUN is well known for its advanced solar cell technology, reliable product quality, and excellent customer service.
- As one of leading PV enterprises, CSUN has delivered more than 4.0GW of solar products to residential, commercial, utility and off-grid projects all around the world.

- Note:
  All specifications, warranties, certifications about module of "CSUN" series also apply to that of "SST".

  All information and data are subject to change without notice.

Right 2018

www.csun-solar.com

Electrical characteristics at Standard Test Conditions(STC)

Module Type	CSUN315-60MM5BB	CSUN310-60MM5BB	CSUN305-60MM5BB	CSUN300-60MM5BB	CSUN295-60MM5BB
Maximum Power - Pmax (W)	315	310	305	300	295
Open Circuit Voltage - Voc (V)	40.1	40.0	39.9	39.8	39.6
Short Circuit Current - Isc (A)	9.95	9.83	9.72	9.6	9.54
Maximum Power Voltage - Vmpp (V)	32.8	32.6	32.4	32.2	32
Maximum Power Current - Impp (A)	9.61	9.52	9.42	9.31	9.22
Module Efficiency	19.40%	19.09%	18.78%	18.48%	18.17%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1,5; module temperature 25°C. Tolerance of Pmpp: 0~+3%.

Measuring uncertainty of power: ±3%. Certified in accordance with IEC 61215, IEC 61730-1/2 and UL 1703.

Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	CSUN315-60MM5BB	CSUN310-60MM5BB	CSUN305-60MM5BB	CSUN300-60MM5BB	CSUN295-60MM5BB
Maximum Power - Pmax (W)	234	230	227	223	219
Open Circuit Voltage - Voc (V)	37.2	37.1	36.9	36.8	36.6
Short Circuit Current - Isc (A)	8.04	7.98	7.86	7.76	7.71
Maximum Power Voltage - Vmpp (V)	30.8	30.6	30.5	30.4	30.1
Maximum Power Current - Impp (A)	7.60	7.51	7.42	7.33	7.33

Normal Operating Cell Temperature((NOCT) : irradiance 800W/m^2; wind speed 1 m/s ; cell temperature 45°C; ambient temperature 20°C.

Measuring uncertainty of power: ±3%. Certified in accordance with IEC 61215, IEC 61730-1/2 and UL 1703.

Temperature Characteristics

NOTC	45°C (±2°C)
Voltage Temperature Coefficient	-0.29%/K
Current Temperature Coefficient	+0.05%/K
Power Temperature Coefficient	-0.39%/K

Maximum Ratings

Maximum System Voltage [V]	1000
Series Fuse Rating [A]	20

Material Characteristics

Dimensions	1640×990×35mm (L×W×H)
Weight	18.3kg
Frame	Anodized aluminum profile
Front Glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	6×10 pieces monocrystalline solar cells series strings (156.75×156.75mm)
Junction Box	Rated current≧13A, IP≧67, TUV&UL
Cable&Connector	Length 900 mm, 1×4 mm^2, compatible with MC4

Packaging

Dimensions(L×W×H)	1690×1120×1120mm
Container20'	360
Container40'	840
Container40'HC	910

System Design

Temperature Range	-40 °C to + 85 °C
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m s^{-1}
Maximum Surface Load	5,400 Pa
Application class	class A
Safety class	class II

Dimensions

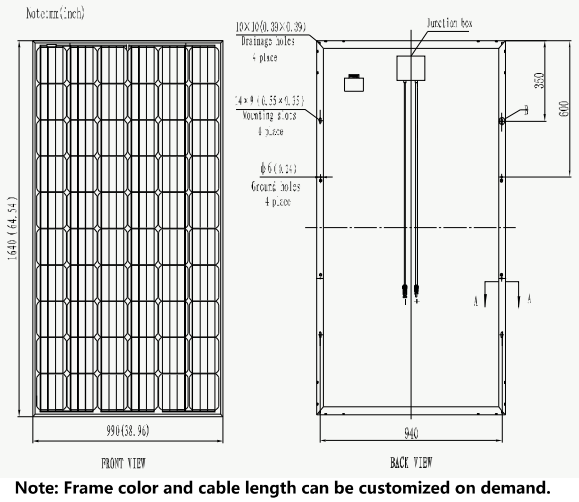

IV-Curves

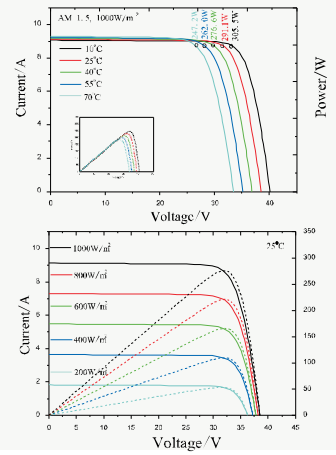

Note: Frame color and cable length can be customized on demand.

Excellent performance under weak light condition.