


MONO




Powerguard Insurance
Global Coverage

The power output shall not be less than 97% of the minimum power output stated in the product data sheet in the first year of the product's life cycle. The loss of power output shall not exceed 0.68% per year thereafter, ending with 80.68% in the 25th year.

■ CSUN ■ Standard Warranty

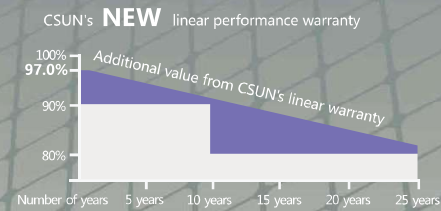

All rights reserved © CSUN

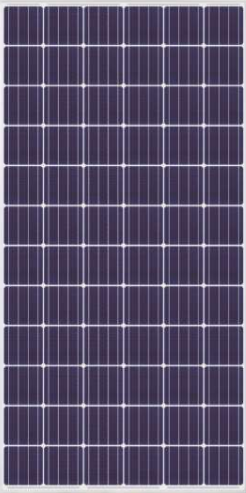

CSUN375-72MH

The Large Scale Project Solution

CSUN375-72MH CSUN370-72MH CSUN365-72MH
CSUN360-72MH CSUN355-72MH

19.36%

Module efficiency

375W

Highest power output

10years

Material & Workmanship warranty

25years

Linear power output warranty



PID-free



World class mono efficiency



Tighter product performance distribution and current sorting reduces the mismatch power loss in system operation



Positive tolerance offer



Good temperature coefficient enables higher output in high temperature regions



Excellent performance under low light conditions



Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa

- China Sunergy Co., Ltd. designs, manufactures and delivers high efficient solar cells and modules to the world from its production centers based in China, Turkey, South Korea and Vietnam.

- Founded in 2004, China Sunergy is well known for its advanced solar cell technology reliable product quality and excellent customer service.

- As one of leading PV enterprises, China Sunergy has delivered more than 4.0GW of solar products to residential, commercial, utility and off-grid projects all around the world.

- Note:
All specifications, warranties, certifications about module of "CSUN" series also apply to that of "SST".

All information and data are subject to change without notice.

Right 2018



www.csun-solar.com

Electrical characteristics at Standard Test Conditions(STC)

Module Type	CSUN375-72MH	CSUN370-72MH	CSUN365-72MH	CSUN360-72MH	CSUN355-72MH
Maximum Power - Pmax (W)	375	370	365	360	355
Open Circuit Voltage - Voc (V)	47.6	47.5	47.4	47.3	47.1
Short Circuit Current - Isc (A)	9.99	9.90	9.79	9.67	9.57
Maximum Power Voltage - Vmpp (V)	39.0	38.9	38.8	38.6	38.4
Maximum Power Current - Imp (A)	9.60	9.52	9.41	9.33	9.24
Module Efficiency	19.36%	19.11%	18.85%	18.59%	18.33%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Tolerance of P_{mp}: 0~+3%.

Measuring uncertainty of power: ±3%. Certified in accordance with IEC 61215, IEC 61730-1/2 and UL 1703.

Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	CSUN375-72MH	CSUN370-72MH	CSUN365-72MH	CSUN360-72MH	CSUN355-72MH
Maximum Power - Pmax (W)	277	274	270	267	263
Open Circuit Voltage - Voc (V)	44.1	44.0	43.9	43.8	43.6
Short Circuit Current - Isc (A)	8.05	7.98	7.89	7.8	7.72
Maximum Power Voltage - Vmpp (V)	36.5	36.4	36.3	36.3	36.1
Maximum Power Current - Imp (A)	7.60	7.51	7.41	7.36	7.29

Normal Operating Cell Temperature(NOCT) : irradiance 800W/m²; wind speed 1 m/s ; cell temperature 45°C; ambient temperature 20°C.

Measuring uncertainty of power: ±3%. Certified in accordance with IEC 61215, IEC 61730-1/2 and UL 1703.

Temperature Characteristics

NOCT	45°C (±2°C)	Maximum System Voltage [V]	1500
Voltage Temperature Coefficient	-0.29%/K	Series Fuse Rating [A]	20
Current Temperature Coefficient	+0.05%/K		
Power Temperature Coefficient	-0.39%/K		

Maximum Ratings

Material Characteristics


Dimensions	1956×990×40mm (L×W×H)
Weight	22.0kg
Frame	Anodized aluminum profile
Front Glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	6×12 pieces monocrystalline solar cells series strings (156.75×156.75mm)
Junction Box	Rated current≥13A, IP≥67, TUV&UL
Cable&Connector	Length 900 mm, 1×4 mm ² , compatible film MC4

Packaging


Dimensions(L×W×H)	1990×1120×1120mm	Temperature Range	-40 °C to + 85 °C
Container20'	260	Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 ms ⁻¹
Container40'	624	Maximum Surface Load	5,400 Pa
Container40' HC	684	Application class	class A
		Safety class	class II

System Design

Dimensions

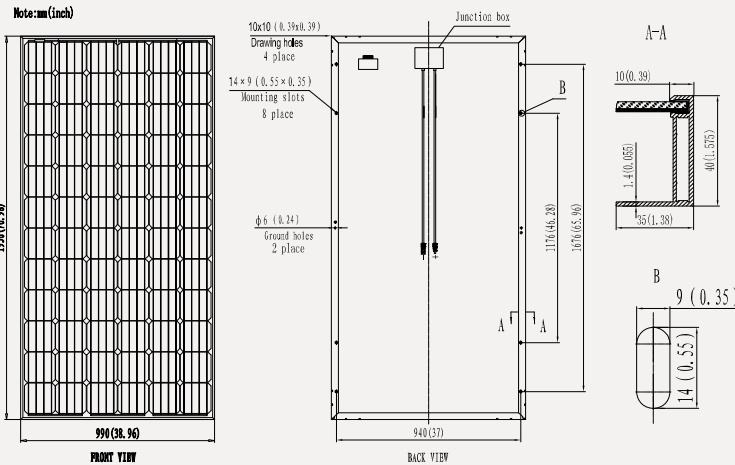

IV-Curves

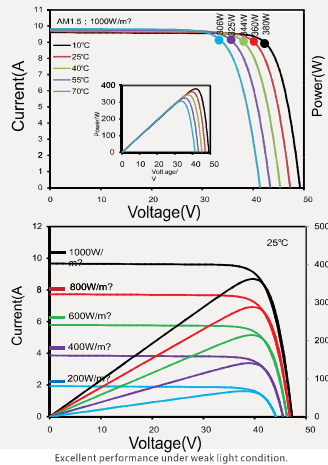

Note: Frame color and cable length can be customized on demand.

Excellent performance under weak light condition.