



SolarEdge Single Phase Inverters

For North America

SE3000A-US / SE3800A-US / SE5000A-US / SE6000A-US /
SE7600A-US / SE10000A-US / SE11400A-US



The best choice for SolarEdge enabled systems

- Specifically designed to work with power optimizers
- Superior efficiency (98%)
- Integrated arc fault protection and rapid shutdown for NEC 2014 and 2017, per article 690.11 and 690.12
- UL1741 SA certified, for CPUC Rule 21 grid compliance
- Small, lightweight and easy to install outdoors or indoors on provided bracket
- Built-in module-level monitoring
- Internet connection through Ethernet or Wireless
- Fixed voltage inverter for longer strings
- Optional – revenue grade data, ANSI C12.1

INVERTERS



Single Phase Inverters for North America

SE3000A-US / SE3800A-US / SE5000A-US / SE6000A-US /
SE7600A-US / SE10000A-US / SE11400A-US

	SE3000A-US	SE3800A-US	SE5000A-US	SE6000A-US	SE7600A-US	SE10000A-US	SE11400A-US	
OUTPUT								
Nominal AC Power Output	3000	3800	5000	6000	7600	9980 @ 208V 10000 @ 240V	11400	VA
Max. AC Power Output	3300	4150	5400 @ 208V 5450 @ 240V	6000	8350	10800 @ 208V 10950 @ 240V	12000	VA
AC Output Voltage Min.-Nom.-Max. ⁽¹⁾ 183 - 208 - 229 Vac	-	-	✓	-	-	✓	-	
AC Output Voltage Min.-Nom.-Max. ⁽¹⁾ 211 - 240 - 264 Vac	✓	✓	✓	✓	✓	✓	✓	
AC Frequency Min.-Nom.-Max. ⁽¹⁾	59.3 - 60 - 60.5							Hz
Max. Continuous Output Current	12.5	16	24 @ 208V 21 @ 240V	25	32	48 @ 208V 42 @ 240V	47.5	A
GFDI Threshold	1							A
Utility Monitoring, Islanding Protection, Country Configurable Thresholds	Yes							Yes
INPUT								
Maximum DC Power (STC)	4050	5100	6750	8100	10250	13500	15350	W
Transformer-less, Ungrounded	Yes							
Max. Input Voltage	500							Vdc
Nom. DC Input Voltage	325 @ 208V / 350 @ 240V							Vdc
Max. Input Current ⁽²⁾	9.5	13	16.5 @ 208V 15.5 @ 240V	18	23	33 @ 208V 30.5 @ 240V	34.5	Adc
Max. Input Short Circuit Current	45							Adc
Reverse-Polarity Protection	Yes							
Ground-Fault Isolation Detection	600k Ω Sensitivity							
Maximum Inverter Efficiency	97.7	98.2	98.3 97 @ 208V	98.3	98	98 97 @ 208V	98	%
CEC Weighted Efficiency	97.5	98	98 @ 240V	97.5	97.5	97.5 @ 240V	97.5	%
Nighttime Power Consumption	< 2.5					< 4		W
ADDITIONAL FEATURES								
Supported Communication Interfaces	RS485, RS232, Ethernet, ZigBee (optional)							
Revenue Grade Data, ANSI C12.1	Optional ⁽³⁾							
Rapid Shutdown - NEC 2014 and 2017 690.12	Automatic Rapid Shutdown upon AC Grid Disconnect ⁽⁵⁾							
STANDARD COMPLIANCE								
Safety	UL1741, UL1741 SA, UL1699B, CSA C22.2, Canadian AFCI according to T.I.L. M-07							
Grid Connection Standards	IEEE1547, Rule 21, Rule 14 (HI)							
Emissions	FCC part15 class B							
INSTALLATION SPECIFICATIONS								
AC output conduit size / AWG range	3/4" minimum / 16-6 AWG					3/4" minimum / 8-3 AWG		
DC input conduit size / # of strings / AWG range	3/4" minimum / 1-2 strings / 16-6 AWG					3/4" minimum / 1-3 strings / 14-6 AWG		
Dimensions with Safety Switch (HxWxD)	30.5 x 12.5 x 7.2 / 775 x 315 x 184					30.5 x 12.5 x 10.5 / 775 x 315 x 260		in / mm
Weight with Safety Switch	51.2 / 23.2		54.7 / 24.7			88.4 / 40.1		lb / kg
Cooling	Natural Convection				Natural convection and internal fan (user replaceable)	Fans (user replaceable)		
Noise	< 25				< 50			dBA
Min.-Max. Operating Temperature Range	-13 to +140 / -25 to +60 (-40 to +60 version available ⁽⁴⁾)							°F / °C
Protection Rating	NEMA 3R							


⁽¹⁾ For other regional settings please contact SolarEdge support.
⁽²⁾ A higher current source may be used; the inverter will limit its input current to the values stated.
⁽³⁾ Revenue grade inverter P/N: SExxxxA-US000NNR2 (for 7600W inverter:SE7600A-US002NNR2).
⁽⁴⁾ -40 version P/N: SExxxxA-US000NNU4 (for 7600W inverter:SE7600A-US002NNU4).
⁽⁵⁾ P/Ns SExxxxA-US0xxxxx have Manual Rapid Shutdown for NEC 2014 compliance (NEC 2017 compliance with outdoor installation)





Power Optimizer

P320 / P370 / P400 / P405 / P505

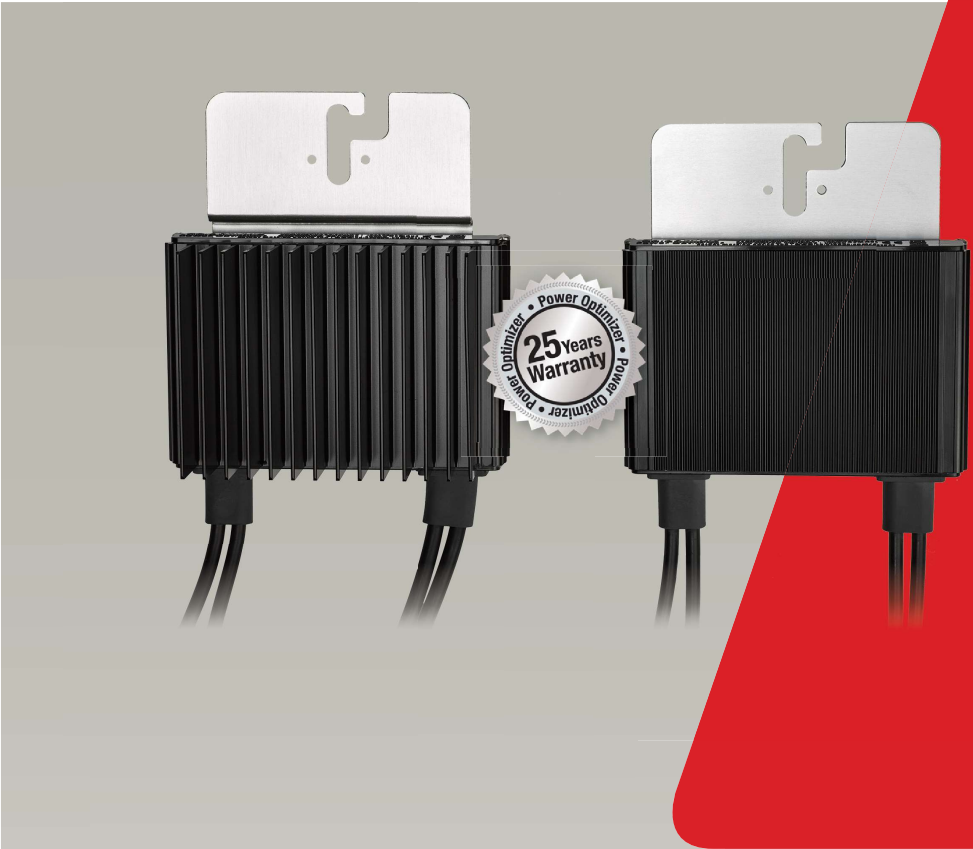

POWER OPTIMIZER

PV power optimization at the module-level

- Specifically designed to work with SolarEdge inverters
- Up to 25% more energy
- Superior efficiency (99.5%)
- Mitigates all types of module mismatch losses, from manufacturing tolerance to partial shading
- Flexible system design for maximum space utilization
- Fast installation with a single bolt
- Next generation maintenance with module-level monitoring
- Compliant with arc fault protection and rapid shutdown NEC requirements (when installed as part of the SolarEdge system)
- Module-level voltage shutdown for installer and firefighter safety



Power Optimizer

P320 / P370 / P400 / P405 / P505

OPTIMIZER MODEL (typical module compatibility)	P320 (for high-power 60-cell modules)	P370 (for higher-power 60 and 72-cell modules)	P400 (for 72 & 96-cell modules)	P405 (for thin film modules)	P505 (for higher current modules)	
INPUT						
Rated Input DC Power ⁽¹⁾	320	370	400	405	505	W
Absolute Maximum Input Voltage (Voc at lowest temperature)	48	60	80	125	83	Vdc
MPPT Operating Range	8 - 48	8 - 60	8 - 80	12.5 - 105	12.5 - 83	Vdc
Maximum Short Circuit Current (Isc)	11		10.1		14	Adc
Maximum DC Input Current	13.75		12.63		17.5	Adc
Maximum Efficiency	99.5					%
Weighted Efficiency	98.8				98.6	%
Overvoltage Category	II					
OUTPUT DURING OPERATION (POWER OPTIMIZER CONNECTED TO OPERATING SOLAREdge INVERTER)						
Maximum Output Current	15					Adc
Maximum Output Voltage	60			85		Vdc
OUTPUT DURING STANDBY (POWER OPTIMIZER DISCONNECTED FROM SOLAREdge INVERTER OR SOLAREdge INVERTER OFF)						
Safety Output Voltage per Power Optimizer	1 ± 0.1					Vdc
STANDARD COMPLIANCE						
EMC	FCC Part15 Class B, IEC61000-6-2, IEC61000-6-3					
Safety	IEC62109-1 (class II safety), UL1741					
RoHS	Yes					
INSTALLATION SPECIFICATIONS						
Maximum Allowed System Voltage	1000					Vdc
Compatible inverters	All SolarEdge Single Phase and Three Phase inverters					
Dimensions (W x L x H)	128 x 152 x 28 / 5 x 5.97 x 1.1	128 x 152 x 36 / 5 x 5.97 x 1.42	128 x 152 x 50 / 5 x 5.97 x 1.96	128 x 152 x 59 / 5 x 5.97 x 2.32		mm / in
Weight (including cables)	630 / 1.4	750 / 1.7	845 / 1.9	1064 / 2.3		gr / lb
Input Connector	MC4 ⁽²⁾					
Output Wire Type / Connector	Double Insulated; MC4					
Output Wire Length	0.95 / 3.0	1.2 / 3.9				m / ft
Operating Temperature Range	-40 - +85 / -40 - +185					°C / °F
Protection Rating	IP68 / NEMA6P					
Relative Humidity	0 - 100					%

⁽¹⁾ Rated STC power of the module. Module of up to +5% power tolerance allowed.

⁽²⁾ For other connector types please contact SolarEdge

PV SYSTEM DESIGN USING A SOLAREDGE INVERTER ⁽³⁾⁽⁴⁾		SINGLE PHASE HD-WAVE	SINGLE PHASE	THREE PHASE 208V	THREE PHASE 480V	
Minimum String Length (Power Optimizers)	P320, P370, P400		8	10	18	
	P405 / P505		6	8	14	
Maximum String Length (Power Optimizers)		25		25	50 ⁽⁵⁾	
		5700 (6000 with SE7600-US - SE11400-US)	5250	6000	12750	W
Parallel Strings of Different Lengths or Orientations			Yes			

⁽³⁾ For detailed string sizing information refer to: http://www.solaredge.com/sites/default/files/string_sizing_na.pdf.

⁽⁴⁾ It is not allowed to mix P405/P505 with P320/P370/P400/P600/P700/P800 in one string.

⁽⁵⁾ A string with more than 30 optimizers does not meet NEC rapid shutdown requirements; safety voltage will be above the 30V requirement

