
Each LED sits on its own copper island (HEAT_R/G/B), never joined: slug isolation is not specified.

Wire pads TP1–TP6 -> driver J3 pins 1–6 (R+ R– G+ G– B+ B–), 24 AWG, twisted per colour.

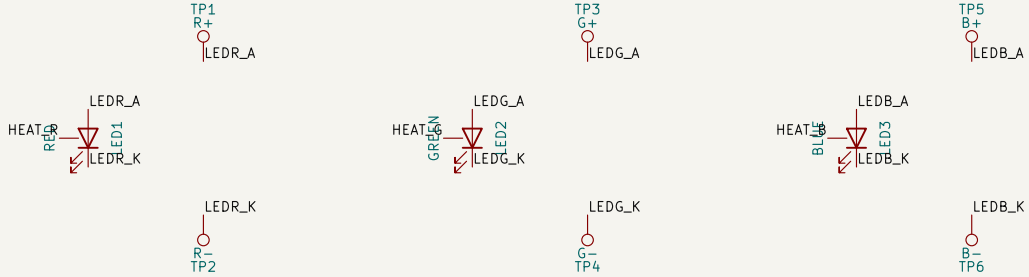

Generated by scripts/sch_led.py
Aluminium, 1 layer. Wires to driver J3: R+ R– G+ G– B+ B–

Sheet: /
File: led.kicad_sch

Title: RGB Spotlight – LED board

Size: A4	Date: 2026-10-05	**Rev: 2.0**
KiCad E.D.A. 10.0.6		Id: 1/1