
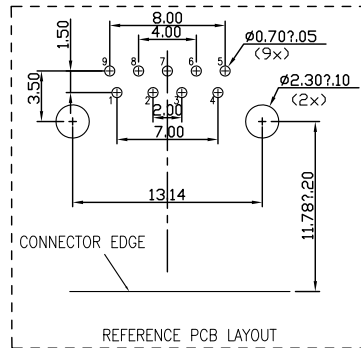



| 目錄 MAPX | 设变内容 MODIFICATION | 日期 DATE |
|------------|----------------------|------------|
| | | |



SPECIFICATIONS:

Contact current Rating:
1.8 Amperes for pin1&pin4.
0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)
Insulation resistance:100Megohms Minimum.





Contact Resistance:
30mΩ Max for pin1&pin4
50mΩMax for other contacts

Mechanical Characteristics:
Mating Force:35 Newtons.Maximum
Unmating Force:10 Newtons.Minimum.

MATERIAL: 8N Min After Durability
Housing: PBT+30%GF 94V-0 COLOR:BLUE
Contact: copper alloy(T=0.25mm)
Shell: Brass

PLATING:
Contact: Au Plated on contact area
Tin Plated on solder area
Nickel underplating over all
Shell: Nickel Plated

operating Temperature:-55℃to+85℃



| 产品图 PRODUCT CHART DWG | | 深圳市精拓金电子有限公司 | | | | | | | |
|-------------------------------------|-------|--------------|-------|---------------|------------|--------------------------|--------------------|---------------------|--------------------------|
| 公差一览表 TOLERANCE UNLESS OTHERWISE | | 单位 UNITS | MM | 制图 DRAWING | 徐榕强 | 产品料号 PRODUCT PART NO. | 901-112A105AD10100 | | |
| X. | ±0.25 | X'. | ±5° | 比例 SCALE | 1:1 | 审核 CHKD | 郭治富 | 产品名称 PRODUCT NO. | AF90度3.0外扣弯脚有边内弹铜壳16.5蓝胶 |
| .X | ±0.20 | .X'. | ±2° | 日期 DATE | 2009/10/20 | 核准 APPD | 黄国荣 | 角法 VIEW | |
| .XX | ±0.15 | .XX'. | ±1° | | | | | 版本 VER | A0 |
| .XXX | ±0.10 | .XXX'. | ±0.5° | | | | | | |