



T2GO video



T2GO Portable CFME

The T2GO Continuous Friction Measuring Equipment is the perfect solution for fast friction measurement on any surface (both dry and contaminated). It is easy to transport and easy to use in even the most narrow spaces, where large trailer or vehicle-based friction testers cannot operate.

T2GO Friction Tester

The flexible measurement workhorse



- Easy to collapse and transport
- Adjustable measuring interval from 3 cm for precise results
- Follows established standards including ASTM and EN
- Includes calibration equipment for easy calibration under 10 minutes
- Optional integrated water system enables for simulated wet conditions

Key Features

- T2GO measures dynamic surface friction with 20% fixed slip
- Replicates 65 km/h high speed CFME values
- Suitable for all-year round use
- Automatically collects and stores data in PC tablet:
 - Friction data
 - Air and surface temperature
 - Humidity
 - GPS position
- Presents data in tables and graphs



Optimal portable friction measurement for:

- Accident investigation by police and insurance companies
- High friction areas such as crosswalks, bus stops and roundabouts
- Controlling friction levels in winter
- Airports - both landside and airside
- Walkways and bicycle paths
- Road markings (EN 1436)
- Helidecks (CAP 437)
- Race tracks
- Factory floors
- Oil platforms
- Cargo boats





Technical Specification

FOR


SARSYS-ASFT T2Go Portable Friction Tester

Continuous Friction Measurement Equipment (CFME)

Weight, including transport casing (PC removed)		32 kg
Operational Weight		23 kg
Total length with handle		1467 mm
Total length without handle		665 mm
Total height on leg stands with handle		994 mm
Total height folded		478 mm
Beam (Width)		292 mm
Measuring principle		Fixed Slip
Slip ratio		20%
Tire dimension		3.00-4 4PR
Tire pressure		0.5 Bar (7 psi)
Wheel Ground Pressure	Front Wheel	Approximately 6.5kg
	Rear Wheel	Approximately 12 kg
Wheel ground pressure control method		Inductive sensors controlling angle of push bar
Motion agent		Pushed by operator
Measuring Speed		Walking speed
Chassis Material		Powder coated s355
Battery type		Li-ion 12V 6800 mAh
Battery capacity		8 hours
Measuring formats		Mu (μ) / BPN / PTV / SRT
Min measuring Interval		30 mm
Standard measuring interval		100 mm
Calibration	Load	Weight scale
	Distance	Measuring tape
Operating computer		10.5" Microsoft Surface Go
Data transfer method		Bluetooth Class 1
Friction Measurement Report (FMR) PDF enabled		Standard
Friction Measurement Report (FMR) Excel enabled		Standard




Dimensions in mm

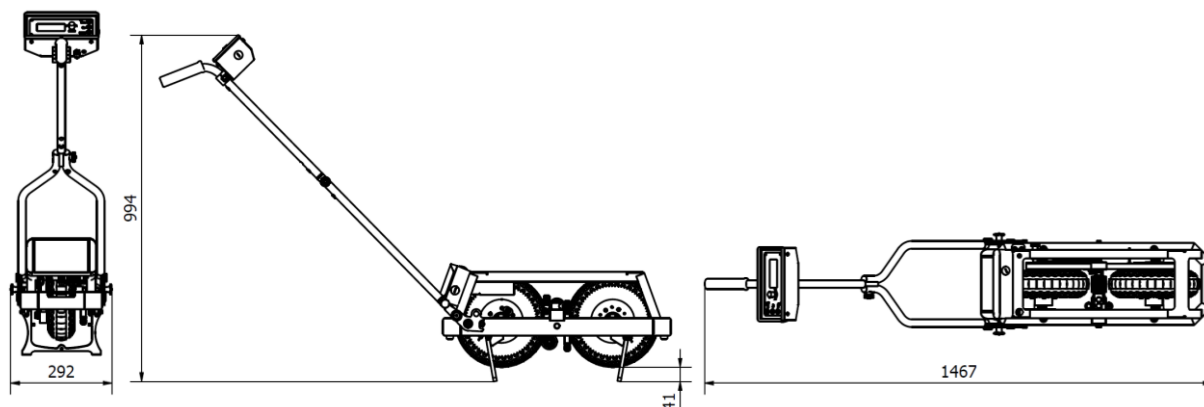

Measuring Computer

Central Processing Unit (CPU) on T2GO chassis	Ametal Atmega V-2560 16 Mhz
Main board type	Arduino MEGA 2560
Programming Language	Arduino
Communication operating computer	Bluetooth Class 1
Communication Display	LCD 20 x 4

Transportation case

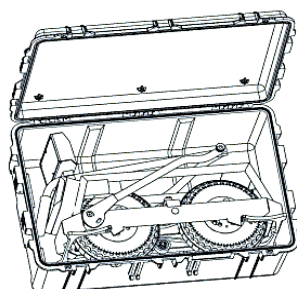

Pelicase 1650 Dim. outside 803x520x316

Additional Equipment

Temperature sensor (ambient air)	Standard
Temperature sensor (ground surface)	Standard
Air Humidity sensor	Standard
Air Pump for wheels	Standard
Battery charger for the T2GO	Standard
Friction Calibration Equipment incl. Digital Scale	Standard
T2GO Operator Manual and Maintenance	Standard
Transportation Case (80x52x32 cm or 31½x21½x12½ in)	Standard
Self-Watering System 18L (4,5 gal)	Optional

Measuring Standards

In accordance with	EN 1436
	CAP 437
Tested by	Penn State University