
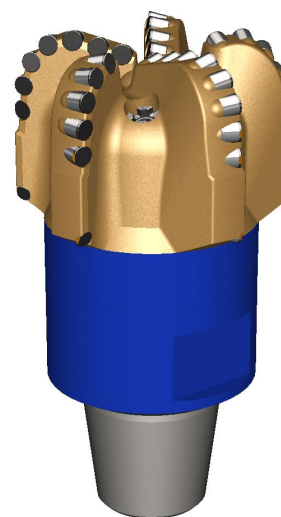


8.5" TT1655

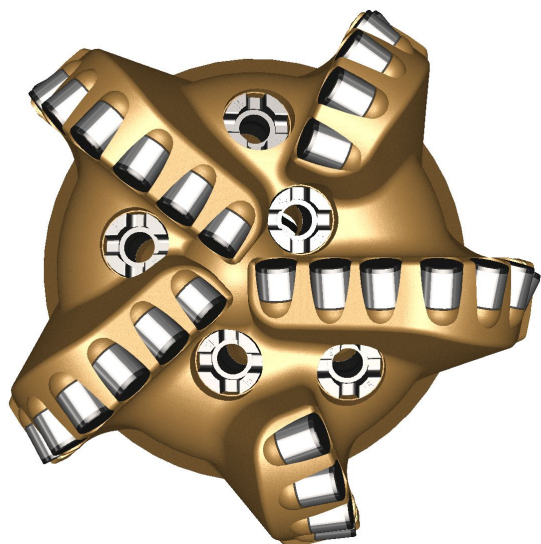

Product Specifications

IADC	M323
Product Series	PDC
Body Material	Matrix
No. of Blades	5
Face Cutters	26 (16mm)
Gage Cutters	1 (13mm), 7 (16mm)
Backup Cutters	0
Total Cutters	1 (13mm), 33 (16mm)
Nozzles	5YZ
Junk Slot Area	19.1 in ²
Gage Pad Length	2 in
Make-up Length	11.3 in
Bit Connection	4-1/2" API+REG

Recommended Operating Parameters


Make-up Torque (MUT)	17.79-19.56 kftlb
Weight On Bit (WOB)	5.63-22.5 klbs
Bit Speed	60-260 rpm
Flow Rate	349-555 gpm
HSI	0

Other Features


- AntiBall^(TM)
- Balanced T3 Trident Cutters^(TM)
- Up-Drill cutters

*Contact Bestebit representative for optimal parameters for maximizing performance

Force Balanced
Cutting Structure



Optimized
Hydraulics



TSP Gauge

