
LV29

DIRECTIONAL SPOT LIGHT

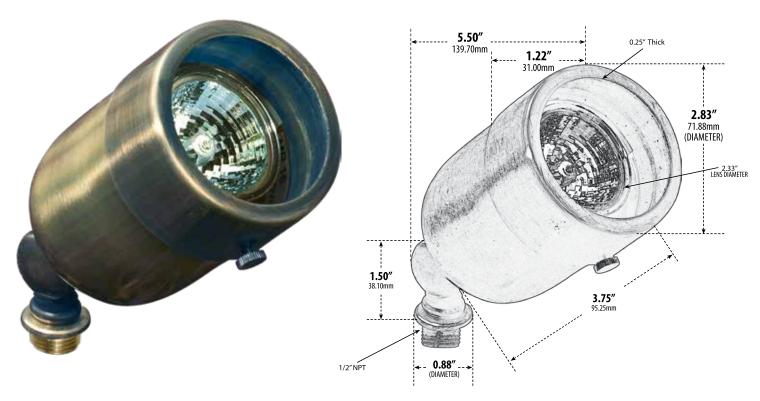

- ► Material: Brass
- Lens: Clear, Heat Resistant, Tempered Glass
- ► Lamp: MR16 Bi-Pin Base (35W Maximum) Available in 27K or 65K

MODEL NUMBER	LAMP Type	ILLUMINANT Type	WATTS (W)	VOLTS (V)	INCLUDED?
LV29	MR16	HALOGEN	20	12	YES
LV29-LED3	MR16-LED	LED	3	12	YES
LV29-LED5	MR16-LED	LED	5	12	YES
LV29-LED7	MR16-LED	LED	7	12	YES
LV29-LED4-RGBW	MR16-LED	LED	4	12	YES

Pre-wired with UL Listed Direct Burial Wire/Cable

- Adjustable Knuckle with 1/2" NPT
- Ground Spike Included for Installation
- ► **Connector Available:** P-CN01 (sold separately)
- **Available Finish:** Copper, Antique Brass, Antique Bronze, Acid Green
- RGBW Lamp Requires/Remote: P-RMT-MR16-LED-4W-MC (sold separately)
- ETL Approved

Overall Dimensions: 3.25"H x 2.83"W x 5.50"D

Maximum Height: 6.25" Minimum Height: 3.25" Maximum Depth: 5.23" Minimum Depth: 3.15"

Weight: 0.80 lbs Approximate Wire Length: 17" Box Dimensions: 8.75"H x 4.50"W x 3.25"D

