FG2000

RECESSED OPEN FACE BRICK, STEP AND WALL LIGHT









► **Lens:** Frosted, Heat Resistant, Tempered Glass


Available Finish: Black, Bronze, White

Recessed Mount


Replacement Cover Plate: P-CVR-FG2000 (sold separately)

ETL Approved

	Illuminant	Base		Volatage	Color	Lamp(s)
Model Number	Туре	Туре	Wattage (W)	(V)	Temp.	Included
FG2000	Incandescent	E26	40W (MAX)	120V	N/A	No
FG2000-L6-RGBW	LED	E26	6W	120V	RGBW	Yes
FG2000-L7-30K	LED	G24	7W	85V-265V	30K	Yes
FG2000-L7-65K	LED	G24	7W	85V-265V	65K	Yes
FG2000-L9-30K	LED	G24	9W	85V-265V	30K	Yes
FG2000-L9-65K	LED	G24	9W	85V-265V	65K	Yes
FG2000-L12-30K	LED	G24	12W	120V-277V	30K	Yes
FG2000-L12-50K	LED	G24	12W	120V-277V	50K	Yes

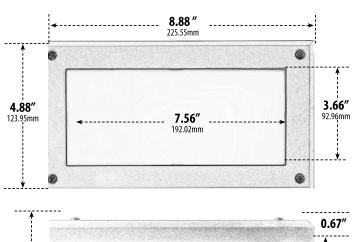

2.50" 63.50mm



*Resist Corrosion-Ocean Front Placement

Overall Dimensions: 4.88"H x 8.88"W x 3.25"D

Weight: 1.60 lbs Approximate Wire Length: N/A Box Dimensions: 3.88"H x 9.00"W x 5.00"D

