


Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

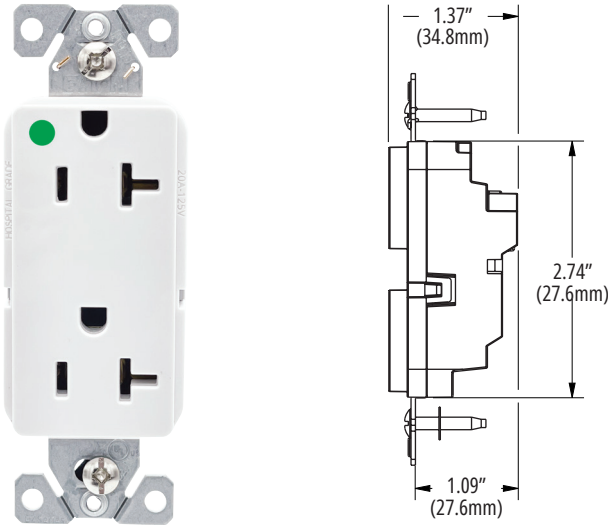

EZ8362W

AVAILABLE IN THESE COLORS

\*For ordering devices, include Cat. no. followed by the color suffix, for example: EZ8200.

B	BK	GY	LA	RD	V	W
Brown	Black	Gray	Light Almond	Red	Ivory	White

MATERIALS

Housing	Top: 8202 Nylon Bottom: 8202 Nylon
Strap	0.047" Thick galvanized steel
Line contacts	0.032" Thick brass C260
Terminal	0.032" Thick brass C260

SPECIFICATIONS

Electrical	<b>Dielectric voltage:</b> Withstands 2000V per UL 498 <b>Current interrupting:</b> Yes, at full-rated current <b>Temperature rise:</b> Max. 30°C (86°F) after Fed Spec Current Overload Test Procedure. <b>Frequency:</b> 60 Hz; Voltage: 125V <b>Amperage:</b> 15A/20A <b>Maximum interrupting capacity:</b> 20 Amps
Testing & code compliance	cULus Listed to UL 498, file no. E15058 Meets all UL 498, Fed Spec W-C-596 testing standards, applicable CSA requirements and NOM certified
Environmental	<b>Flammability:</b> Meets UL 94 requirements; V2 rated <b>Temperature rating:</b> -20°C to 60°C (-4°F to 140°F)
Mechanical	<b>Terminal accommodation:</b> With separable terminals use connectors EZRCSTR or EZRC SOL <b>Voltage ratings:</b> Permanently marked on device




Arrow Hart Website

Buyer's Guide Product Page

DESCRIPTION

2-pole, 3-wire grounding  
15A, 125V/AC  
20A, 125V/AC



DUPLEX RECEPTACLES, SEPARABLE TERMINAL TYPE

Rating		Description	Catalog no.	Color suffix
A	V/AC			
15	125	5-15R	<input type="checkbox"/> EZ8200	B, BK, GY, LA, RD, V, W
20	125	5-20R	<input type="checkbox"/> EZ8300	B, BK, GY, LA, RD, V, W
15	125	5-15R	<input type="checkbox"/> EZ8262	B, BK, GY, LA, RD, V, W
20	125	5-20R	<input type="checkbox"/> EZ8362	B, BK, GY, LA, RD, V, W

APPLICATIONS

Leveraging Arrow Hart's existing feature-rich and high quality products, EZ Link Hospital Grade receptacles have been designed to meet the requirements of Healthcare applications, while speeding up installation with a simple and convenient sliding termination type design. EZ Link fulfills a need for customers who want to reduce project timelines through quick installation of wiring devices.

DESIGN FEATURES

- Intuitive arrow-shaped mating design and slim profile allows for rapid installation during trim-out
- Connectors slide and lock into place on back of device, guided by precision rails and custom engineered wings resulting in unmatched connector retention
- Discrete connector designs prevent incorrect installations

COMPLEMENTARY PRODUCTS

Wallplates: PJS26, PJS262, PJS8

EZ Link Connector: EZRCSTR, EZRC SOL

ADDITIONAL RESOURCES



Scan QR code for additional marketing collateral