LV108

DIRECTIONAL SPOT LIGHT





- Lens: Clear, Heat Resistant, Tempered Glass
- ► Lamp: MR16 Bi-Pin Base (50W Maximum) Available in 27K or 65K (LED)


MODEL NUMBER	LAMP Type	ILLUMINANT Type	WATTS (W)	VOLTS (V)	LAMP(S) INCLUDED?
LV108	MR16	HALOGEN	20	12	YES
LV108-LED3	MR16-LED	LED	3	12	YES
LV108-LED5	MR16-LED	LED	5	12	YES
LV108-LED7	MR16-LED	LED	7	12	YES
LV108-LED4-RGBW	MR16-LED	LED	4	12	YES

Pre-wired with UL Listed Direct Burial Wire/Cable

► Adjustable U-Shaped Bracket with Ground Spike

- ► **P-SND-01 Tree Stand** (sold separately)
- RGBW Lamp Requires/Remote: P-RMT-MR16-LED-4W-MC (sold separately)
- ► **Connector Available:** P-CN01 (sold separately)
- Available Finish: Black, White, Bronze, Green, Verde Green
- ► ETL Approved



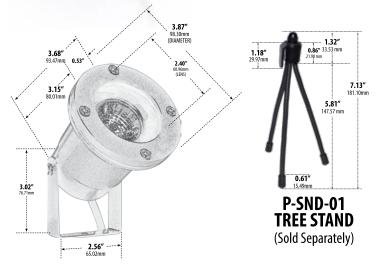

Overall Dimensions: 7.00"H x 3.87"W x 5.00"D

Maximum Height: 8.00" Minimum Height: 5.00" Maximum Depth: 6.00" Minimum Depth: 4.25"

Weight: 1.00 lbs

Approximate Wire Length: 17"

Box Dimensions: 7.50"W x 4.75"H x 3.75"D

