D7500-12


DROP DOWN GLOBE CEILING FIXTURE



Overall Dimensions: See specs above

Weight (Globe): 13": 2.30 lbs, 16": 3.04 lbs, 18": 4.28 lbs Weight (Stem w/Cover): 12" - .38 lbs, 18" - .52 lbs, 24" - .60 lbs

Box Dimensions: n/a

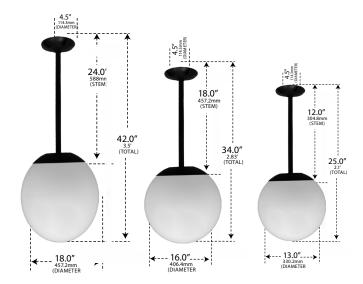

- ▶ **Base Material:** Powder Coated Cast Aluminum
- ► **Globe:** White, Heat Resistant, Polyethylene Globe
- Available Base Finish: Black, Verde Green, White
- ► Available Stem Lengths: 12", 18", 24" (Please Specify When Ordering)
- ETL Approved

	Illuminant	Base	Wattage	Volatage	Color	Lamp(s)	Stem Length
Model Number	Туре	Туре	(W)	(V)	Temp.	Included	(Inches)
D7500-12	Incandescent	E26	60W (MAX)	120V	N/A	No	12"
D7500-12-L12-RGBW	LED	E26	12W	86V-265V	RGBW	Yes	12"
D7500-12-L18-30K	LED	E26	18W	120V-277V	30K	Yes	12"
D7500-12-L18-65K	LED	E26	18W	120V-277V	65K	Yes	12"
D7500-12-L20-30K	LED	G24	20W	120V-277V	30K	Yes	12"
D7500-12-L20-50K	LED	G24	20W	120V-277V	50K	Yes	12"
D7500-18	Incandescent	E26	60W (MAX)	120V	N/A	No	18"
D7500-18-L12-RGBW	LED	E26	12W	86V-265V	RGBW	Yes	18"
D7500-18-L18-30K	LED	E26	18W	120V-277V	30K	Yes	18"
D7500-18-L18-65K	LED	E26	18W	120V-277V	65K	Yes	18"
D7500-18-L20-30K	LED	G24	20W	120V-277V	30K	Yes	18"
D7500-18-L20-50K	LED	G24	20W	120V-277V	50K	Yes	18"
D7500-24	Incandescent	E26	60W (MAX)	120V	N/A	No	24"
D7500-24-L12-RGBW	LED	E26	12W	86V-265V	RGBW	Yes	24"
D7500-24-L18-30K	LED	E26	18W	120V-277V	30K	Yes	24"
D7500-24-L18-65K	LED	E26	18W	120V-277V	65K	Yes	24"
D7500-24-L20-30K	LED	G24	20W	120V-277V	30K	Yes	24"
D7500-24-L20-50K	LED	G24	20W	120V-277V	50K	Yes	24"

