




Aluminum Rigid Conduit Bodies T Type -Threaded

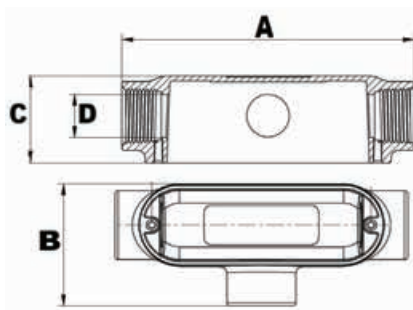


- Tapered Threaded Hubs (NPT)
- RainTight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS -T SERIES				BOX QTY
		A	B	C	D	
I4060	1/2"	4.72	2.03	1.36	.61	50
I4061	3/4"	5.51	2.30	1.63	.81	50
I4062	1"	6.46	2.68	1.89	1.04	25
I4063	1-1/4"	8.35	3.52	2.50	1.37	10
I4064	1-1/2"	8.35	3.52	2.50	1.60	10
I4065	2"	10.55	4.27	3.41	2.06	10
I4066	2-1/2"	13.46	5.89	3.98	2.46	1
I4067	3"	13.46	5.89	4.53	3.06	1
I4068	3-1/2"	16.30	7.66	5.60	3.54	1
I4069	4"	16.30	7.66	5.60	4.02	1
WITH COVER AND GASKET						
I4070	1/2"	4.72	2.03	1.36	.61	50
I4071	3/4"	5.51	2.30	1.63	.81	50
I4072	1"	6.46	2.68	1.89	1.04	25
I4073	1-1/4"	8.35	3.52	2.50	1.37	10
I4074	1-1/2"	8.35	3.52	2.50	1.60	10
I4075	2"	10.55	4.27	3.41	2.06	10
I4076	2-1/2"	13.46	5.89	3.98	2.46	1
I4077	3"	13.46	5.89	4.53	3.06	1
I4078	3-1/2"	16.30	7.66	5.60	3.54	1
I4079	4"	16.30	7.66	5.60	4.02	1

Aluminum Rigid Conduit Bodies LB Type -Threaded



- Tapered Threaded Hubs (NPT)
- RainTight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS -LB SERIES				BOX QTY
		A	B	C	D	
I4040	1/2"	4.31	1.34	2.09	.61	50
I4041	3/4"	5.08	1.56	2.39	.81	50
I4042	1"	5.92	1.82	2.78	1.04	25
I4043	1-1/4"	7.82	2.51	3.52	1.37	10
I4044	1-1/2"	7.82	2.51	3.52	1.60	10
I4045	2"	10.05	3.19	4.51	2.06	10
I4046	2-1/2"	12.83	4.49	5.31	2.46	1
I4047	3"	12.83	4.49	5.91	3.06	1
I4048	3-1/2"	15.65	5.55	7.09	3.54	1
I4049	4"	15.65	5.55	7.09	4.02	1
WITH COVER AND GASKET						
I4050	1/2"	4.31	1.34	2.09	.61	50
I4051	3/4"	5.08	1.56	2.39	.81	50
I4052	1"	5.92	1.82	2.78	1.04	25
I4053	1-1/4"	7.82	2.51	3.52	1.37	10
I4054	1-1/2"	7.82	2.51	3.52	1.60	10
I4055	2"	10.05	3.19	4.51	2.06	10
I4056	2-1/2"	12.83	4.49	5.31	2.46	1
I4057	3"	12.83	4.49	5.91	3.06	1
I4058	3-1/2"	15.65	5.55	7.09	3.54	1
I4059	4"	15.65	5.55	7.09	4.02	1