


Aluminum Combination Conduit Bodies T Type



To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- RainTight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

DIMENSIONS = INCHES

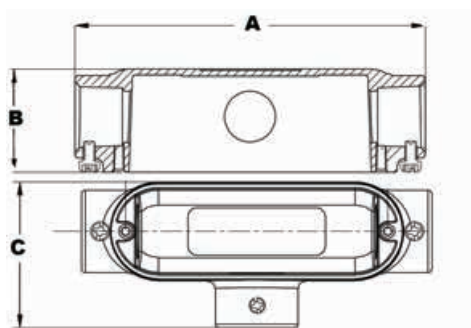

CAT. NO.	TRADE SIZE	DIMENSIONS-T SERIES			BOX QTY
		A	B	C	
I4252	1/2"	4.72	1.36	2.03	50
I4253	3/4"	5.51	1.63	2.30	50
I4254	1"	6.46	1.89	2.68	25
I4255	1-1/4"	8.35	2.50	3.52	10
I4256	1-1/2"	8.35	2.50	3.52	10
I4257	2"	10.55	3.41	4.27	10
WITH COVER AND GASKET					
I4258	1/2"	4.72	1.36	2.03	50
I4259	3/4"	5.51	1.63	2.30	50
I4260	1"	6.46	1.89	2.68	25
I4261	1-1/4"	8.35	2.50	3.52	10
I4262	1-1/2"	8.35	2.50	3.52	10
I4263	2"	10.55	3.41	4.27	10


Aluminum Combination Conduit Bodies LB Type



To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- RainTight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

DIMENSIONS = INCHES

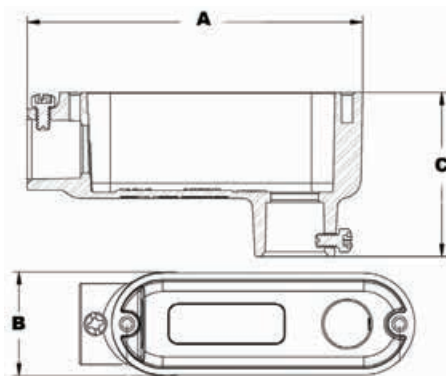

CAT. NO.	TRADE SIZE	DIMENSIONS-LB SERIES			BOX QTY
		A	B	C	
I4240	1/2"	4.31	1.34	2.09	50
I4241	3/4"	5.08	1.56	2.39	50
I4242	1"	5.92	1.82	2.78	25
I4243	1-1/4"	7.82	2.51	3.52	10
I4244	1-1/2"	7.82	2.51	3.52	10
I4245	2"	10.05	3.19	4.51	10
WITH COVER AND GASKET					
I4246	1/2"	4.31	1.34	2.09	50
I4247	3/4"	5.08	1.56	2.39	50
I4248	1"	5.92	1.82	2.78	25
I4249	1-1/4"	7.82	2.51	3.52	10
I4250	1-1/2"	7.82	2.51	3.52	10
I4251	2"	10.05	3.19	4.51	10