

Non-Insulated Ring Terminals



MAXIMUM ELECTRIC CURRENT:


AWG	8	6	4	2
AMP	70	95	125	170

MAXIMUM ELECTRIC RATING: 302°F (150°C) 600V

TERMINAL MATERIAL:

Electro-Tin Plated Copper - Braze Seam

FEATURES: Serrated Barrel

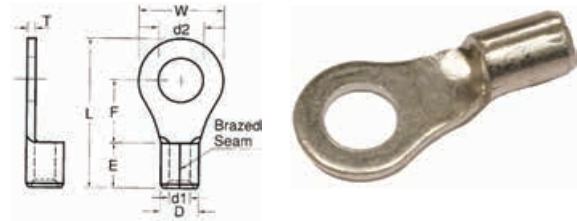

DIMENSIONS = INCHES

CAT. NO.	WIRE SIZE AWG	STUD SIZE	D2	W	F	L	E	D	D1	T	BAG QTY
II076	8	#6	.146	.315	.366	.846	.335	.283	.177	.047	100
II078	8	#8	.169	.472	.366	.937	.335	.283	.177	.047	100
II080	8	#10	.209	.472	.366	.937	.335	.283	.177	.047	100
II082	8	1/4	.252	.472	.366	.937	.335	.283	.177	.047	100
II084	8	5/16	.331	.591	.543	1.161	.335	.283	.177	.047	100
II086	8	3/8	.413	.591	.543	1.161	.335	.283	.177	.047	100
II088	8	1/2	.512	.787	.591	1.319	.335	.283	.177	.047	100
III38	8	9/16	.591	1.244	1.008	1.949	.335	.283	.177	.047	100
III39	8	5/8	.669	1.244	1.008	1.949	.335	.283	.177	.047	100
III40	8	11/16	.748	1.244	1.008	1.949	.335	.283	.177	.047	100
III41	8	3/4	.827	1.244	1.008	1.949	.335	.283	.177	.047	100
II090	6	#8	.169	.472	.524	1.180	.413	.354	.228	.059	100
II092	6	#10	.209	.472	.524	1.180	.413	.354	.228	.059	100
II094	6	1/4	.252	.472	.524	1.180	.413	.354	.228	.059	100
II096	6	5/16	.331	.630	.559	1.280	.413	.354	.228	.059	100
II098	6	3/8	.413	.630	.559	1.280	.413	.354	.228	.059	100
II100	6	7/16	.453	.866	.780	1.614	.413	.354	.228	.059	100
II102	6	1/2	.512	.866	.780	1.614	.413	.354	.228	.059	100
III42	6	9/16	.591	1.244	.996	2.008	.413	.354	.228	.059	100
III43	6	5/8	.669	1.244	.996	2.008	.413	.354	.228	.059	100
III44	6	11/16	.748	1.244	.996	2.008	.413	.354	.228	.059	100
III45	6	3/4	.827	1.244	.996	2.008	.413	.354	.228	.059	100
II104	4	#8	.169	.480	.594	1.307	.472	.453	.303	.067	100
II106	4	#10	.209	.480	.594	1.307	.472	.453	.303	.067	100
II108	4	1/4	.252	.480	.594	1.299	.472	.453	.303	.067	100
II110	4	5/16	.331	.650	.531	1.319	.472	.453	.303	.067	100
III12	4	3/8	.413	.650	.531	1.319	.472	.453	.303	.067	100
III14	4	7/16	.453	.866	.776	1.673	.472	.453	.303	.067	100
III16	4	1/2	.512	.866	.776	1.673	.472	.453	.303	.067	100
III34	4	9/16	.591	1.181	.953	2.008	.472	.453	.303	.067	100
III35	4	5/8	.669	1.181	.953	2.008	.472	.453	.303	.067	100
III36	4	11/16	.748	1.181	.953	2.008	.472	.453	.303	.067	100
III37	4	3/4	.827	1.181	.953	2.008	.472	.453	.303	.067	100
III18	2	#10	.209	.602	.685	1.535	.551	.524	.370	.071	100
II120	2	1/4	.252	.602	.685	1.535	.551	.524	.370	.071	100
II122	2	5/16	.331	.602	.685	1.535	.551	.524	.370	.071	100
II124	2	3/8	.413	.602	.685	1.535	.551	.524	.370	.071	100
II126	2	7/16	.453	.866	.697	1.681	.551	.524	.370	.071	100
II128	2	1/2	.512	.866	.697	1.681	.551	.524	.370	.071	100
III30	2	9/16	.591	1.181	.917	2.047	.551	.524	.370	.071	100
III31	2	5/8	.669	1.181	.917	2.047	.551	.524	.370	.071	100
III32	2	11/16	.748	1.181	.917	2.047	.551	.524	.370	.071	100
III33	2	3/4	.827	1.181	.917	2.047	.551	.524	.370	.071	100