

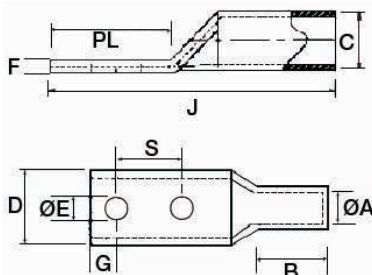


CONNECTORS

Copper Compression

A15

Copper Long Barrel 2 Hole Compression Lugs

NEW
STUD SIZES

- High Conductivity Seamless Copper
- Electro-Tin Plating Resists Corrosion, Reduces Contact Resistance for Maximum Conductivity
- Dual Mounting Holes
- Long Barrel Accommodates Multiple Crimps
- Color Coded Die Index and Crimp Marks Printed on Barrel
- UL 486A Listed for Applications Thru 35KV

DIMENSIONS = INCHES

CAT. NO.	WIRE RANGE	STUD SIZE	HOLE SPACING	COLOR	A	C	J	B	D	F	E	G	PL	S	BOX QTY
94545	8 STR.	#8	3/4	RED	.172	.272	2.32	.75	.42	.08	.16	.28	1.25	.75	45
94310	8 STR.	#10	5/8	RED	.172	.272	2.32	.75	.42	.08	.21	.28	1.25	.63	45
94546	8 STR.	#10	3/4	RED	.172	.272	2.32	.75	.42	.08	.21	.28	1.25	.75	45
94312	8 STR.	1/4	5/8	RED	.172	.272	2.32	.75	.42	.08	.25	.28	1.25	.63	45
94547	8 STR.	1/4	3/4	RED	.172	.272	2.32	.75	.42	.08	.25	.28	1.25	.75	45
94548	8 STR.	1/4	1	RED	.172	.272	2.32	.75	.42	.08	.25	.28	1.25	1.00	45
94549	8 STR.	3/8	3/4	RED	.172	.272	2.32	.75	.56	.08	.41	.28	1.25	.75	45
94314	8 STR.	3/8	1	RED	.172	.272	2.32	.75	.56	.08	.41	.28	1.25	1.00	45
94553	6 STR.	#10	5/8	BLUE	.205	.295	2.68	1.12	.42	.08	.21	.32	1.25	.63	35
94315	6 STR.	1/4	1/2	BLUE	.205	.295	2.68	1.12	.42	.08	.25	.32	1.25	.50	35
94316	6 STR.	1/4	5/8	BLUE	.205	.295	2.68	1.12	.42	.08	.25	.32	1.25	.63	35
94317	6 STR.	1/4	3/4	BLUE	.205	.295	2.68	1.12	.42	.08	.25	.32	1.25	.75	35
94554	6 STR.	1/4	1	BLUE	.205	.295	2.68	1.12	.42	.08	.25	.32	1.25	1.00	35
94555	6 STR.	5/16	1	BLUE	.205	.295	2.68	1.12	.42	.08	.33	.32	1.25	1.00	35
94556	6 STR.	3/8	3/4	BLUE	.205	.295	2.68	1.12	.42	.08	.41	.41	1.25	.75	35
94557	6 STR.	3/8	7/8	BLUE	.205	.295	2.68	1.12	.42	.08	.41	.41	1.25	.87	35
94319	6 STR.	3/8	1	BLUE	.205	.295	2.68	1.12	.42	.08	.41	.41	1.81	1.00	35
94320	6 STR.	1/2	1-3/4	BLUE	.205	.295	2.68	1.12	.42	.08	.51	.41	1.81	1.75	35
94323	4 STR.	1/4	3/4	GRAY	.250	.344	2.76	1.12	.49	.09	.25	.32	1.25	.75	25
94324	4 STR.	1/4	5/8	GRAY	.250	.344	2.76	1.12	.49	.09	.25	.32	1.25	.63	25
94559	4 STR.	1/4	1	GRAY	.250	.344	2.76	1.12	.49	.09	.25	.32	1.25	1.00	25
94325	4 STR.	5/16	1	GRAY	.250	.344	2.76	1.12	.49	.09	.33	.32	1.25	1.00	30
94327	4 STR.	3/8	1	GRAY	.250	.344	2.76	1.12	.56	.09	.41	.41	1.80	1.00	30
94326	4 STR.	1/2	1-3/4	GRAY	.250	.344	2.76	1.12	.70	.09	.51	.55	2.99	1.75	30
94328	2 STR.	1/4	5/8	BROWN	.315	.422	3.27	1.25	.60	.10	.25	.32	1.62	.63	30
94329	2 STR.	1/4	3/4	BROWN	.315	.422	3.27	1.25	.60	.10	.25	.32	1.62	.75	30
94330	2 STR.	5/16	3/4	BROWN	.315	.422	3.27	1.25	.60	.10	.33	.32	1.62	.75	30
94332	2 STR.	5/16	7/8	BROWN	.315	.422	3.27	1.25	.60	.10	.33	.32	1.62	.87	20
94333	2 STR.	3/8	1	BROWN	.315	.422	3.27	1.25	.60	.10	.41	.41	1.62	1.00	20
94334	2 STR.	1/2	1-3/4	BROWN	.315	.422	3.27	1.25	.70	.10	.51	.62	2.99	1.75	20
94338	1 STR.	1/4	5/8	GREEN	.360	.469	2.87	1.25	.67	.11	.25	.28	1.25	.63	15
94339	1 STR.	1/4	3/4	GREEN	.360	.469	3.27	1.25	.67	.11	.25	.28	1.25	.75	15
94340	1 STR.	5/16	7/8	GREEN	.360	.469	3.27	1.25	.67	.11	.33	.32	1.62	.87	30
94341	1 STR.	3/8	7/8	GREEN	.360	.469	4.65	1.25	.67	.11	.41	.41	1.62	.87	30
94343	1 STR.	3/8	1	GREEN	.360	.469	4.65	1.25	.67	.11	.41	.41	1.81	1.00	30
94342	1 STR.	1/2	1-3/4	GREEN	.360	.469	4.65	1.25	.70	.11	.51	.62	2.99	1.75	30
94345	1/0 STR.	1/4	5/8	PINK	.390	.520	3.39	1.38	.74	.13	.25	.28	1.25	.63	25
94558	1/0 STR.	1/4	3/4	PINK	.390	.520	3.39	1.38	.74	.13	.25	.28	1.25	.75	25
94346	1/0 STR.	5/16	7/8	PINK	.390	.520	3.39	1.38	.74	.13	.33	.32	1.61	.87	25
94348	1/0 STR.	3/8	1	PINK	.390	.520	3.58	1.38	.74	.13	.41	.38	1.81	1.00	25
94560	1/0 STR.	3/8	1-3/4	PINK	.390	.520	3.58	1.38	.74	.13	.41	.38	1.81	1.75	25
94350	1/0 STR.	1/2	1-3/4	PINK	.390	.520	4.76	1.38	.74	.13	.51	.62	2.99	1.75	25
94352	2/0 STR.	1/4	5/8	BLACK	.441	.563	3.86	1.50	.81	.12	.25	.28	1.25	.63	20
94353	2/0 STR.	1/4	3/4	BLACK	.441	.563	3.86	1.50	.81	.12	.25	.28	1.25	.75	20
94562	2/0 STR.	5/16	1	BLACK	.441	.563	3.86	1.50	.81	.12	.33	.28	1.25	1.00	20
94563	2/0 STR.	5/16	1-3/4	BLACK	.441	.563	3.86	1.50	.81	.12	.33	.28	1.25	1.75	20
94354	2/0 STR.	3/8	1	BLACK	.441	.563	3.86	1.50	.81	.12	.41	.38	1.81	1.00	20
94356	2/0 STR.	1/2	1-3/4	BLACK	.441	.563	5.04	1.50	.81	.12	.51	.62	2.99	1.75	20
94358	3/0 STR.	1/4	3/4	ORANGE	.492	.622	3.98	1.50	.90	.13	.25	.28	1.25	.75	15
94359	3/0 STR.	5/16	1	ORANGE	.492	.622	3.98	1.50	.90	.13	.33	.32	1.62	1.00	15
94360	3/0 STR.	3/8	1	ORANGE	.492	.622	3.98	1.50	.90	.13	.41	.38	1.81	1.00	15
94361	3/0 STR.	3/8	1-3/4	ORANGE	.492	.622	5.16	1.50	.90	.13	.41	.38	1.81	1.75	20
94362	3/0 STR.	1/2	1-3/4	ORANGE	.492	.622	5.16	1.50	.90	.13	.51	.62	2.99	1.75	20