


## TYPE PBTI

### Features

- Available with color coded screw caps
- Patented screw design
- Cold temperature rated to -45° C
- High dielectric strength plastisol
- Removable plugs
- Prefilled with De-ox® oxide inhibiting compound
- NIMBUS 4 Flex wire way caps are Reflex Blue
- UL 486A/B Listed for 600 volts, 90° C
- Dual rated


### Benefits

- Simplifies motor wire-up
- Improves vibration resistance, compresses conductor without damage, eliminates the need for ferrules, making it reusable
- Application variability
- Chemical resistant
- Protect wire way from contamination
- Prevents oxides from forming
- Easy identification in the field
- Ensures reliability
- For copper, copper flex or aluminum conductor

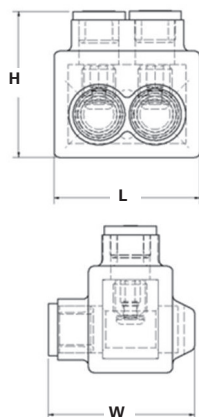

SCREW BODY  
allows tightening  
and loosening  
with internal  
hex head

DISK PAD  
eliminates  
tearing of  
strands in DLO  
and flex wire



BELLEVILLE WASHER  
provides constant  
normal force  
around disk pad

D

| Catalog Number | No. of Ports | Wire Range           | Alternate Wire Range | Dimensions - in (mm) |              |              | Hex Size |
|----------------|--------------|----------------------|----------------------|----------------------|--------------|--------------|----------|
|                |              |                      |                      | L                    | W            | H            |          |
| PBTI-2-4-F*    | 2            | 8-14 H,I,K,M, DLO    | 4-14 AWG             | 1.410 (35.8)         | 1.257 (31.9) | 1.408 (35.8) | 3/16     |
| PBTI-3-4-F*    | 3            | 8-14 H,I,K,M, DLO    | 4-14 AWG             | 2.035 (51.7)         | 1.257 (31.9) | 1.408 (35.8) | 3/16     |
| PBTI-4-4-F*    | 4            | 8-14 H,I,K,M, DLO    | 4-14 AWG             | 2.660 (67.6)         | 1.257 (31.9) | 1.408 (35.8) | 3/16     |
| PBTI-5-4-F*    | 5            | 8-14 H,I,K,M, DLO    | 4-14 AWG             | 3.285 (83.4)         | 1.257 (31.9) | 1.408 (35.8) | 3/16     |
| PBTI-2-1/0-F*  | 2            | 1-14 H,I,K,DLO 2-14M | 1/0-14 AWG           | 1.623 (41.2)         | 1.625 (41.3) | 1.627 (41.3) | 3/16     |
| PBTI-3-1/0-F*  | 3            | 1-14 H,I,K,DLO 2-14M | 1/0-14 AWG           | 2.248 (57.1)         | 1.625 (41.3) | 1.627 (41.3) | 3/16     |
| PBTI-4-1/0-F*  | 4            | 1-14 H,I,K,DLO 2-14M | 1/0-14 AWG           | 2.873 (73.0)         | 1.625 (41.3) | 1.627 (41.3) | 3/16     |
| PBTI-5-1/0-F*  | 5            | 1-14 H,I,K,DLO 2-14M | 1/0-14 AWG           | 3.498 (88.8)         | 1.625 (41.3) | 1.627 (41.3) | 3/16     |

\* Each catalog number must be combined with a color code from Table to determine final catalog number for ordering (i.e. PBTI-2-4-F-\*)

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Fully rated per NEC Article 310-316

Tested to UL 486A/B, UL File E6207

| Table  |            |
|--------|------------|
| Color  | Color Code |
| Blue   | BLU        |
| Red    | RED        |
| Black  | BLK        |
| Yellow | YEL        |
| Orange | ORG        |
| Brown  | BRN        |
| Green  | GRN        |
| White  | WHT        |