


Copper Long Barrel 1 Hole Compression Lugs



- High Conductivity Seamless Copper
- Electro-Tin Plating Resists Corrosion
- Single Mounting Hole
- Long Barrel Accommodates Multiple Crimps
- Color Coded Die Index and Crimp Marks Printed on Barrel
- UL 486AB Listed for Applications Thru 35KV

CAT. NO.	WIRE RANGE	STUD SIZE	COLOR CODE	DIMENSIONS									BOX QTY
				A	C	J	B	D	F	E	G	PL	
94210	8 STR.	#10	RED	0.173"	0.271"	1.51"	0.80"	0.42"	0.08"	0.21"	0.28"	0.59"	50
94211	8 STR.	1/4"	RED	0.173"	0.271"	1.52"	0.81"	0.42"	0.08"	0.25"	0.28"	0.59"	50
94852	6 STR.	#8	BLUE	0.204"	0.297"	2.01"	1.12"	0.42"	0.08"	0.16"	0.29"	0.65"	40
94213	6 STR.	#10	BLUE	0.204"	0.297"	2.01"	1.12"	0.42"	0.08"	0.21"	0.29"	0.65"	40
94214	6 STR.	1/4"	BLUE	0.204"	0.297"	2.01"	1.12"	0.42"	0.08"	0.25"	0.29"	0.65"	40
94215	6 STR.	5/16"	BLUE	0.204"	0.297"	2.01"	1.12"	0.42"	0.08"	0.33"	0.29"	0.65"	40
94216	6 STR.	3/8"	BLUE	0.204"	0.297"	2.01"	1.12"	0.60"	0.08"	0.41"	0.29"	0.65"	40
94217	4 STR.	#10	GRAY	0.251"	0.344"	2.05"	1.12"	0.49"	0.09"	0.21"	0.29"	0.65"	30
94218	4 STR.	1/4"	GRAY	0.251"	0.344"	2.05"	1.12"	0.49"	0.09"	0.25"	0.29"	0.65"	30
94219	4 STR.	5/16"	GRAY	0.251"	0.344"	2.05"	1.12"	0.56"	0.09"	0.33"	0.29"	0.65"	30
94220	4 STR.	3/8"	GRAY	0.251"	0.344"	2.05"	1.12"	0.59"	0.09"	0.41"	0.29"	0.65"	30
94221	2 STR.	1/4"	BROWN	0.315"	0.422"	2.24"	1.25"	0.60"	0.10"	0.25"	0.38"	0.75"	15
94222	2 STR.	5/16"	BROWN	0.315"	0.422"	2.24"	1.25"	0.60"	0.10"	0.33"	0.38"	0.75"	15
94223	2 STR.	3/8"	BROWN	0.315"	0.422"	2.24"	1.25"	0.60"	0.10"	0.41"	0.38"	0.75"	15
94860	1 STR.	1/4"	GREEN	0.36"	0.469"	2.32"	1.25"	0.67"	0.11"	0.25"	0.38"	0.75"	15
94226	1 STR.	5/16"	GREEN	0.36"	0.469"	2.32"	1.25"	0.67"	0.11"	0.33"	0.38"	0.75"	15
94227	1 STR.	3/8"	GREEN	0.36"	0.469"	2.32"	1.25"	0.67"	0.11"	0.41"	0.38"	0.75"	15
94866	1/0 STR.	#10	PINK	0.39"	0.52"	2.56"	1.38"	0.74"	0.13"	0.21"	0.41"	0.81"	10
94868	1/0 STR.	1/4"	PINK	0.39"	0.52"	2.56"	1.38"	0.74"	0.13"	0.25"	0.41"	0.81"	10
94230	1/0 STR.	5/16"	PINK	0.39"	0.52"	2.56"	1.38"	0.74"	0.13"	0.33"	0.41"	0.81"	10
94234	1/0 STR.	3/8"	PINK	0.39"	0.52"	2.56"	1.38"	0.74"	0.13"	0.41"	0.41"	0.81"	10
94235	1/0 STR.	1/2"	PINK	0.39"	0.52"	2.56"	1.38"	0.74"	0.13"	0.51"	0.41"	0.81"	10
94870	2/0 STR.	1/4"	BLACK	0.441"	0.563"	2.64"	1.50"	0.81"	0.12"	0.25"	0.48"	0.81"	10
94238	2/0 STR.	3/8"	BLACK	0.441"	0.563"	2.64"	1.50"	0.81"	0.12"	0.41"	0.48"	0.81"	10
94239	2/0 STR.	1/2"	BLACK	0.441"	0.563"	2.64"	1.50"	0.81"	0.12"	0.51"	0.48"	0.81"	10
94872	3/0 STR.	1/4"	ORANGE	0.492"	0.622"	3.03"	1.50"	0.90"	0.13"	0.25"	0.48"	1.06"	20
94245	3/0 STR.	3/8"	ORANGE	0.492"	0.622"	3.03"	1.50"	0.90"	0.13"	0.41"	0.48"	1.06"	20
94246	3/0 STR.	1/2"	ORANGE	0.492"	0.622"	3.03"	1.50"	0.90"	0.13"	0.51"	0.48"	1.06"	20
94876	4/0 STR.	1/4"	PURPLE	0.547"	0.688"	3.23"	1.62"	1.00"	0.13"	0.25"	0.52"	1.06"	15
94253	4/0 STR.	3/8"	PURPLE	0.547"	0.688"	3.23"	1.62"	1.00"	0.13"	0.41"	0.52"	1.06"	15
94254	4/0 STR.	1/2"	PURPLE	0.547"	0.688"	3.23"	1.62"	1.00"	0.13"	0.51"	0.52"	1.06"	15

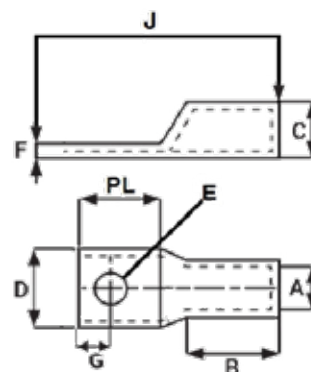

CONNECTORS

Copper Compression