


TYPE SBJ

Features

- Cable and ring terminals manufactured from high strength copper alloy
- Bonding washer made from Viridium® plated stainless steel
- Green color, universal to identify ground
- Complete jumper assembly

Benefits

- Provides maximum electrical conductivity
- Maximum durability in outdoor environments, resists galvanic corrosion
- Aids visual inspection
- Quick and easy installation, no surface preparation

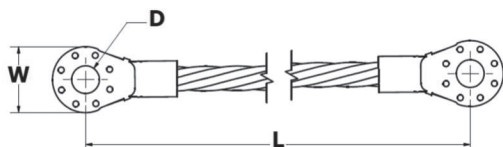

Catalog Number*	Wire Size	Dimensions - in. (mm)	
		L	W
SBJ-X-6	6AWG	6.000 (152.4)	0.670 (170)
SBJ-X-712	6AWG	7.500 (190.5)	0.670 (170)
SBJ-X-9	6AWG	9.000 (228.6)	0.670 (170)
SBJ-X-1012	6AWG	10.500 (266.7)	0.670 (170)
SBJ-X-12	6AWG	12.000 (304.8)	0.670 (170)
SBJ-X-15	6AWG	15.000 (381.0)	0.670 (170)
SBJ-X-18	6AWG	18.000 (457.2)	0.670 (170)
SBJ-X-21	6AWG	21.000 (533.4)	0.670 (170)
SBJ-X-24	6AWG	24.000 (609.6)	0.670 (170)
SBJ-X-28	6AWG	28.000 (711.2)	0.670 (170)
SBJ-X-32	6AWG	32.000 (812.8)	0.670 (170)
SBJ-X-36	6AWG	36.000 (914.4)	0.670 (170)
SBJ-X-40	6AWG	40.000 (1016.0)	0.670 (170)
SBJ-X-44	6AWG	44.000 (1117.6)	0.670 (170)
SBJ-X-48	6AWG	48.000 (1219.2)	0.670 (170)
SBJ-X-54	6AWG	54.000 (1371.6)	0.670 (170)
SBJ-X-60	6AWG	60.000 (1524.0)	0.670 (170)
SBJ-X-66	6AWG	66.000 (1676.4)	0.670 (170)
SBJ-X-72	6AWG	72.000 (1828.8)	0.670 (170)

*X = Bolt Size

X Value	D - in. (mm)	Bolt Size
14	0.252 (6.4)	1/4 (M6)
516	0.331 (8.4)	5/16 (M8)
38	0.413 (10.5)	3/8 (M10)

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

UL 467 Listed for grounding and bonding, UL File E34440

UL 2703 Listed, UL File E354420

* Bolt not included