


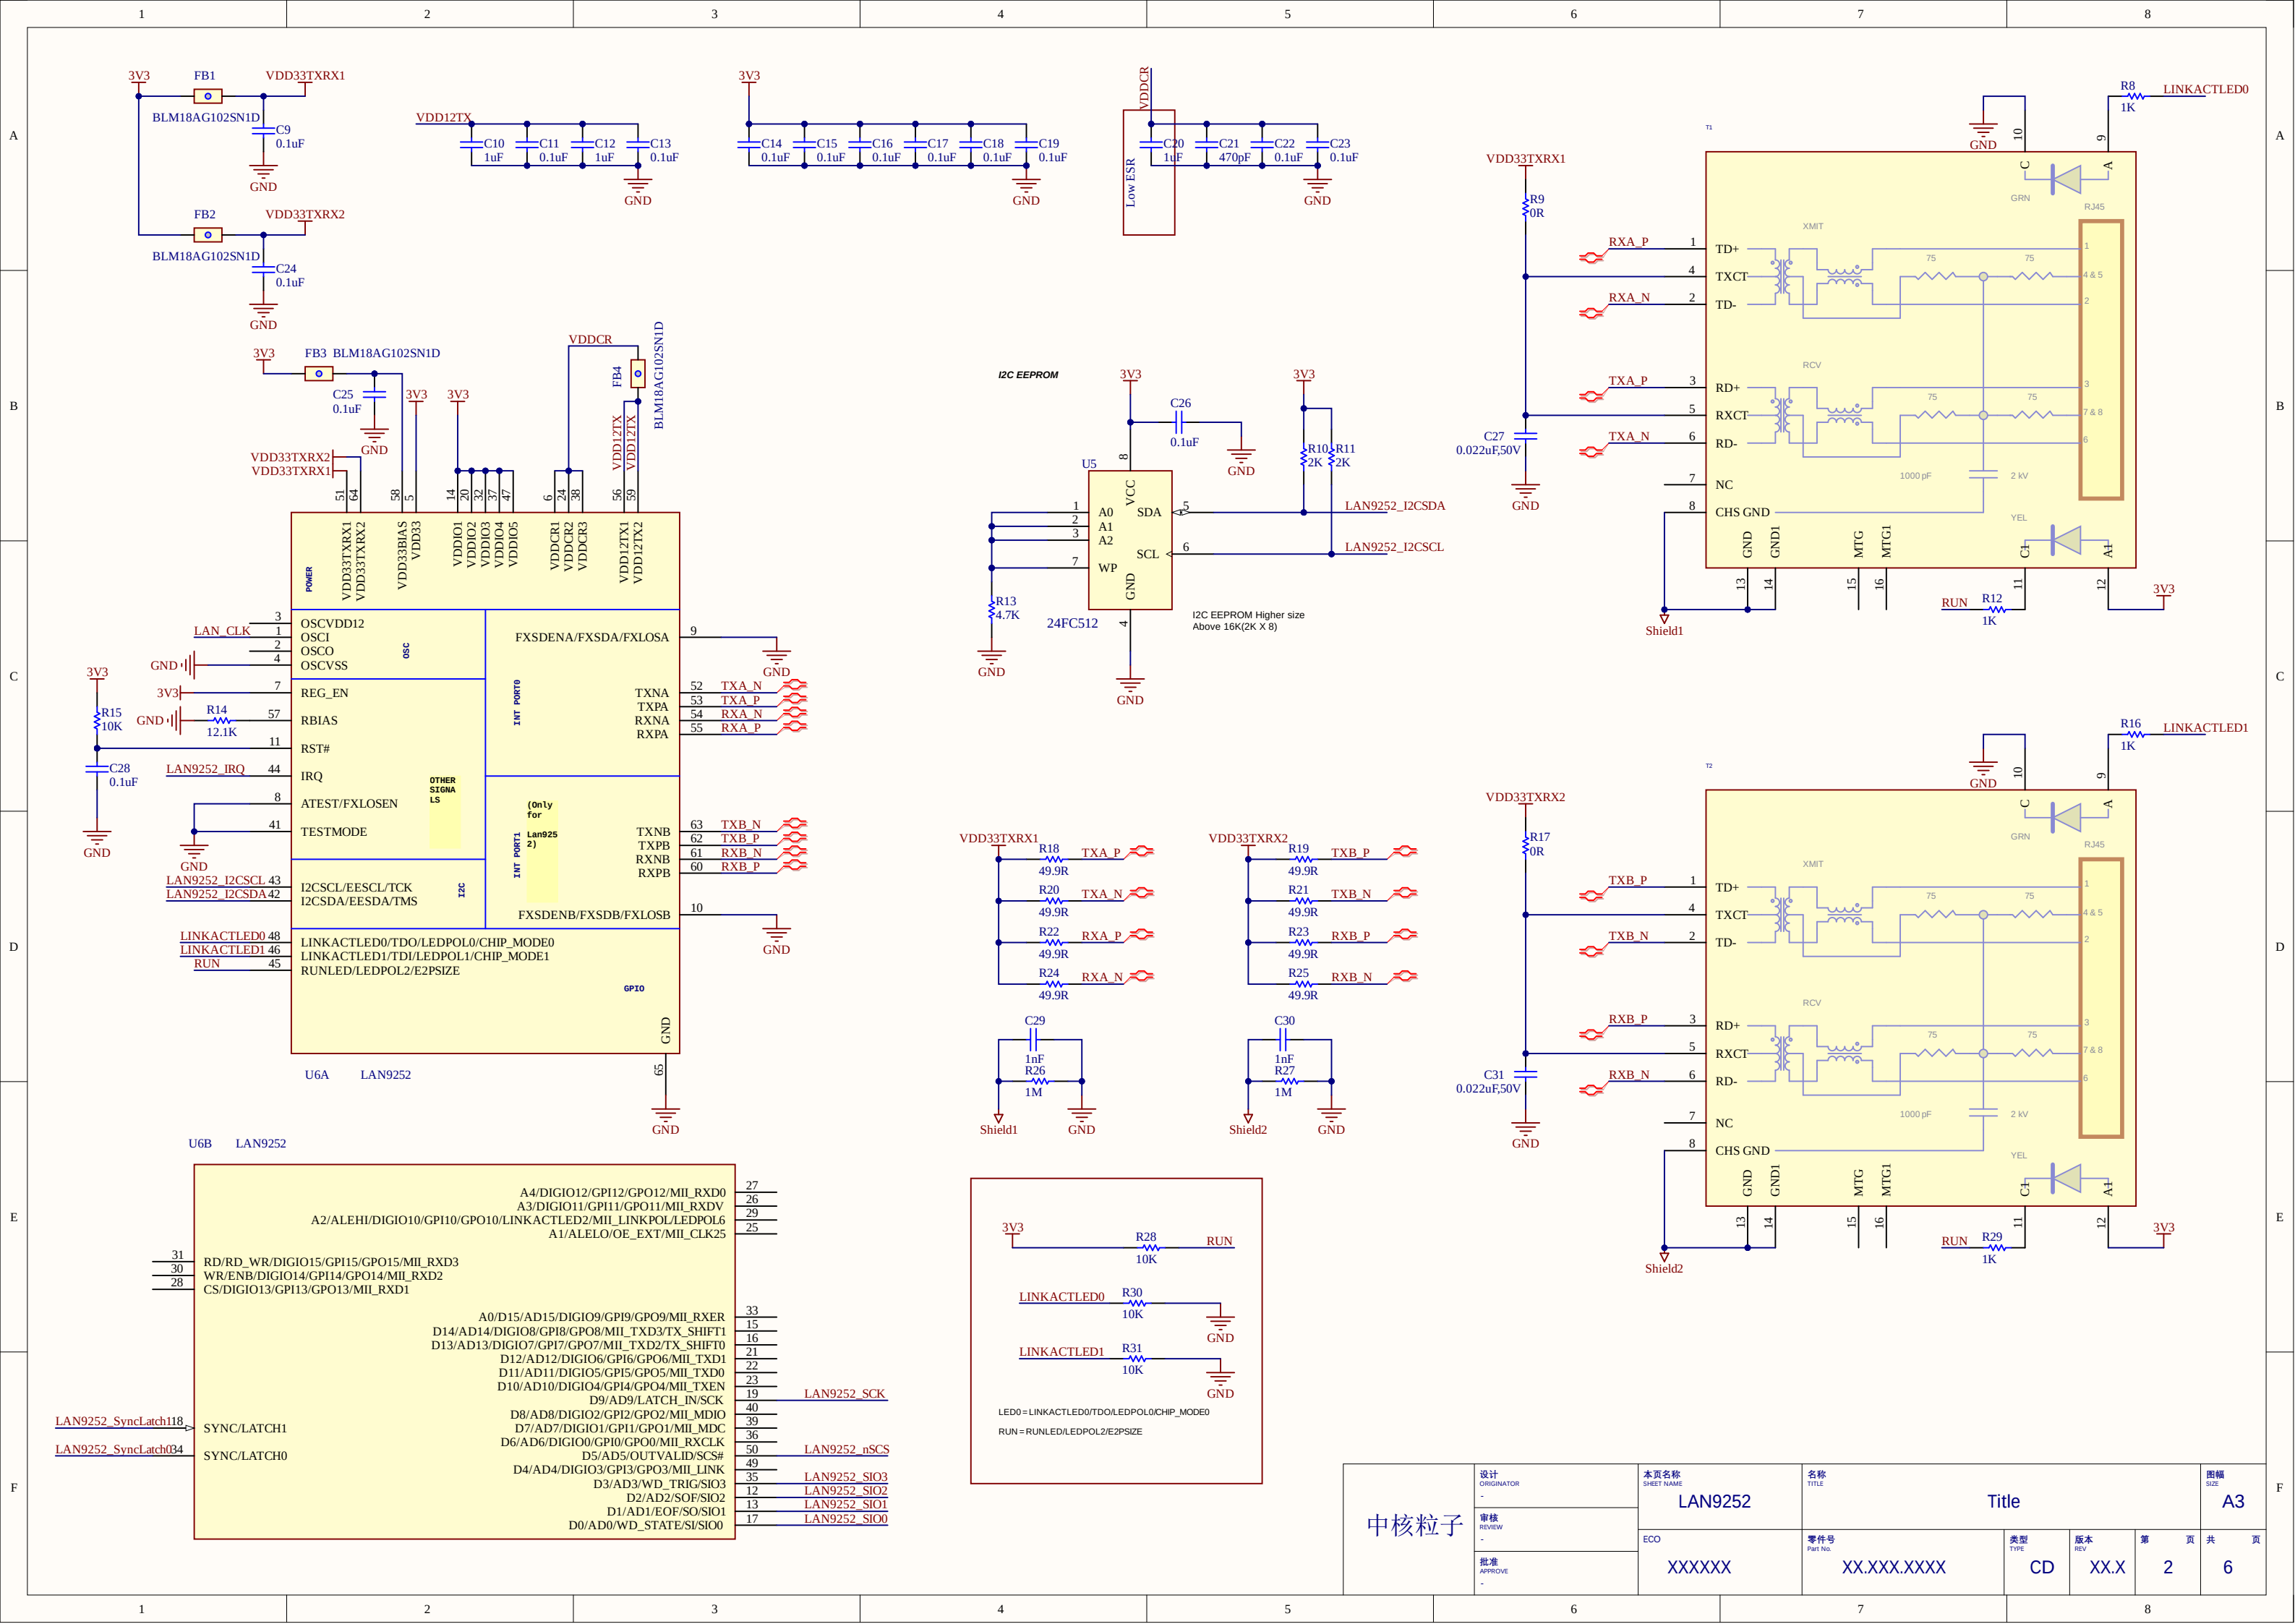

A




B

C

D














E

F


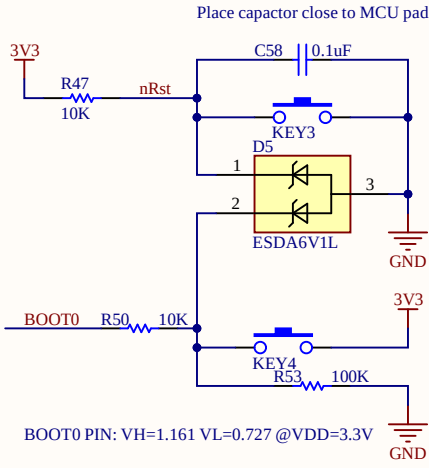
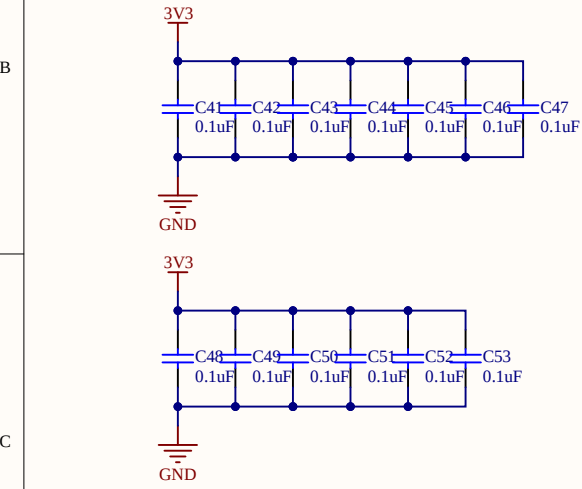
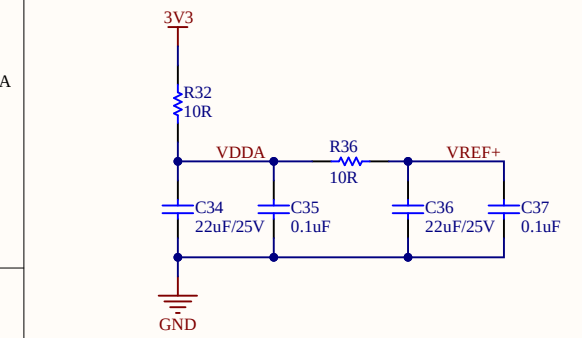


MCU setting:


Clock: RCC->HSE=Crystal/Ceramic Resonator
ETH:mode=RMII
FDCAN1: Activated
SDRAM2: SDCKE0+SDNE0; 4 banks; 13 bits; 16 bits; 16-bit byte enable
NAND Flash 1:NCE Chip Select; 8 bits; NWAIT
LPUART1: Asynchronous; Hardware Flow Control:disable
LAN9252: OCTSPI1, Quad SPI; Port1CLK; Port1 NCS; Port1 IO[3:0]
SPI4:Full-Duplex Master; Hardware NSS output signal
SPI6:Full-Duplex Slave; Hardware NSS input signal
USART3:Asynchronous; Hardware Flow Control (RS485)
USB_OTG_HS: External Phy: Disable; Internal FS phy: Device_Only; Active_VBUS: Disable

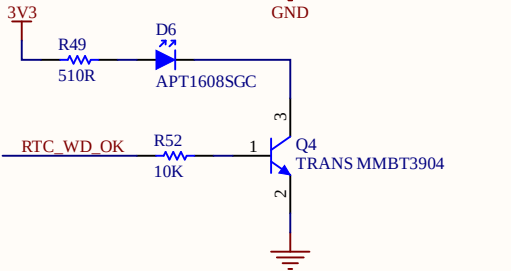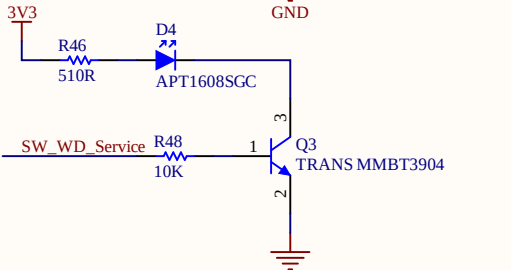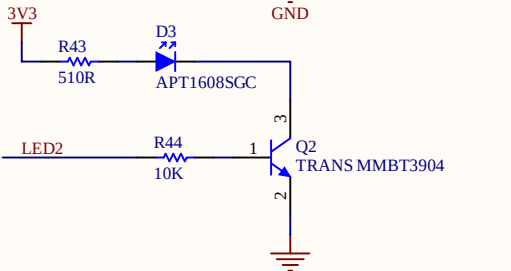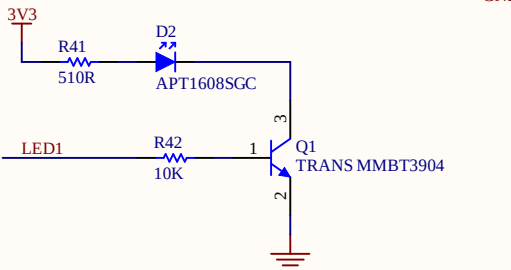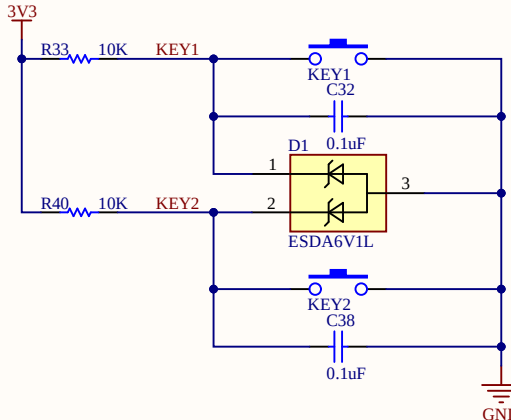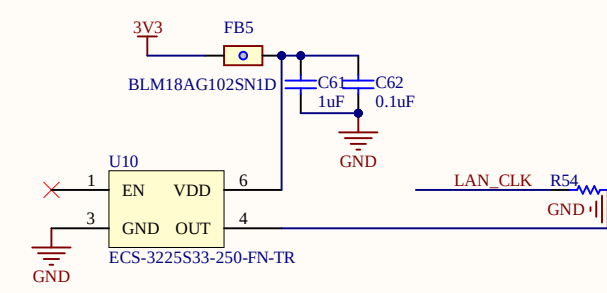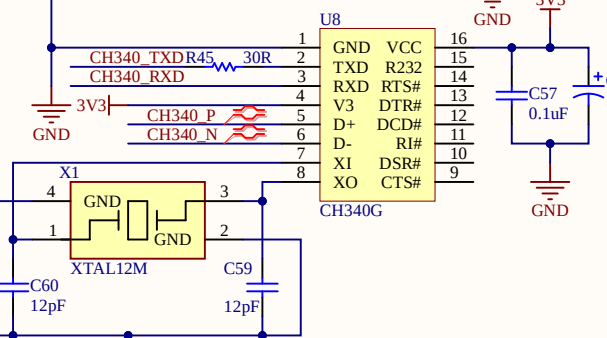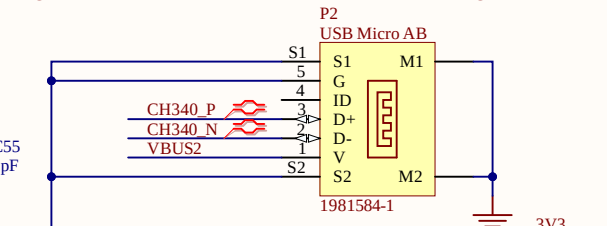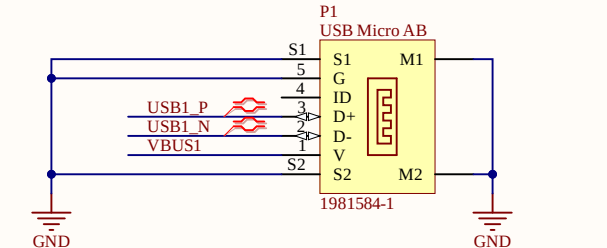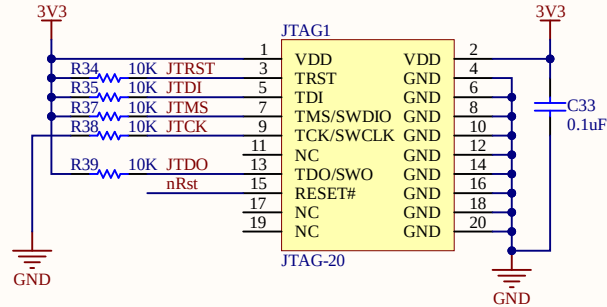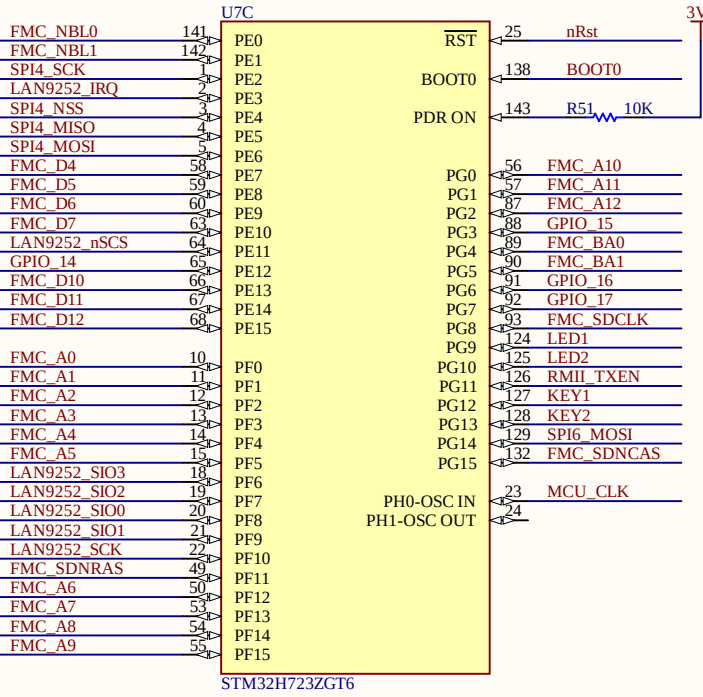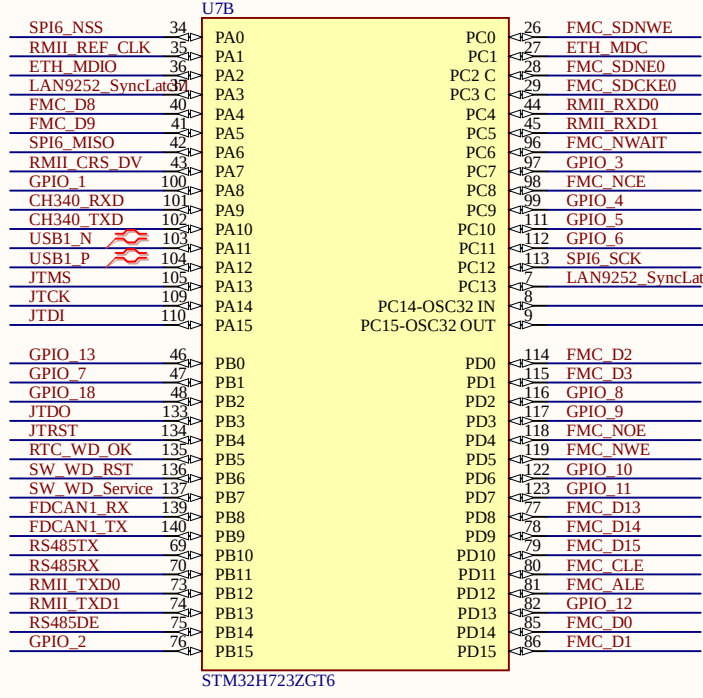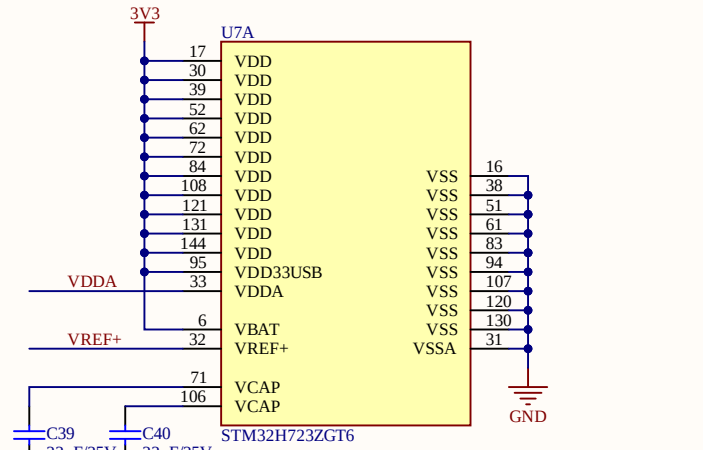




中核粒子	设计 ORIGINATOR -	本页名称 SHEET NAME MCU	名称 TITLE Title	图幅 SIZE A3	
	审核 REVIEW -	ECO	零件号 Part No. XX.XXX.XXXX	类型 TYPE CD	版本 REV XX.X
	批准 APPROVE -	XXXXXX	第 3 页 共 6 页		

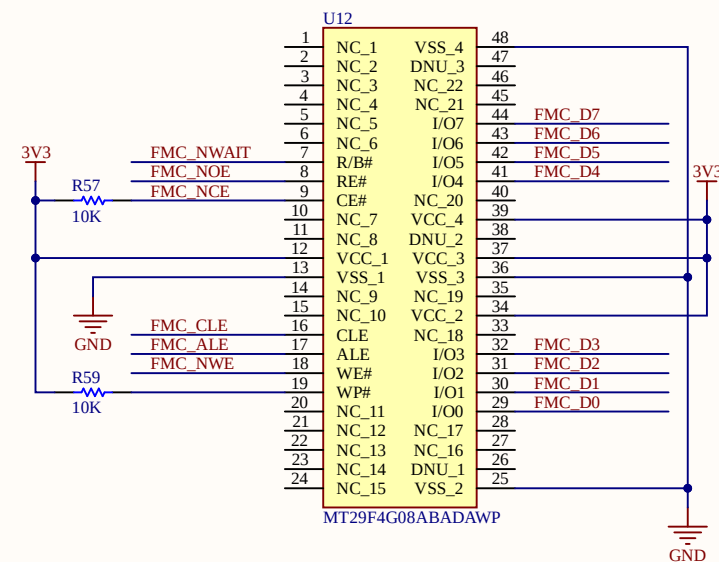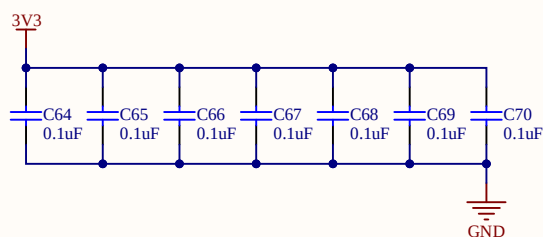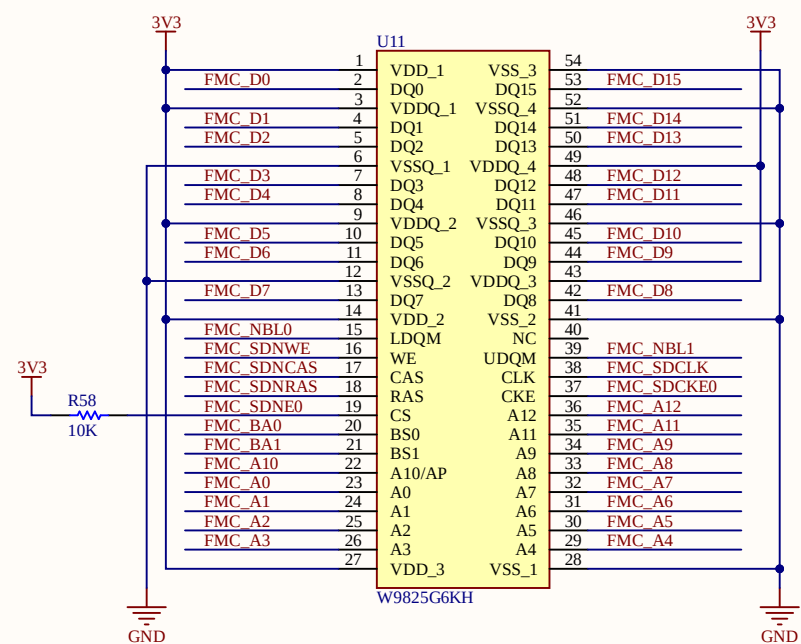





中核粒子	设计 ORIGINATOR -	本页名称 SHEET NAME Memory	名称 TITLE Title					图幅 SIZE A3
	审核 REVIEW -	ECO	零件号 Part No.		类型 TYPE	版本 REV	第 页	共 页
	批准 APPROVE -	XXXXXX	XX.XXX.XXXXX		CD	XX.X	4	6

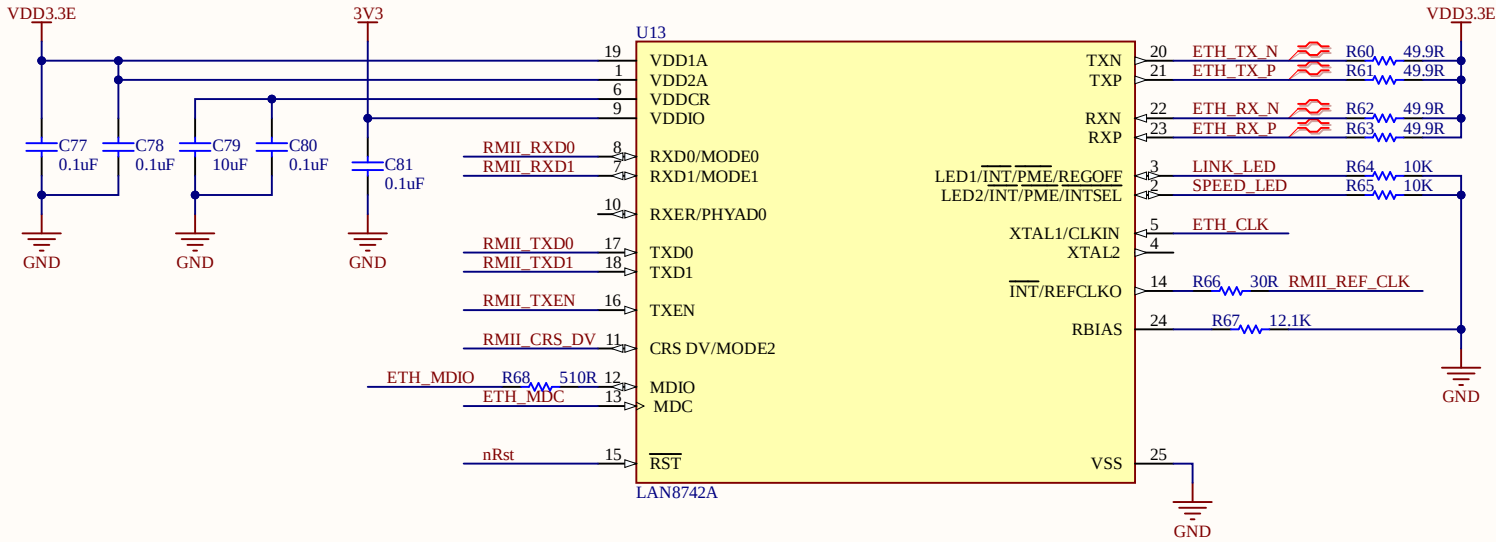

LAN8720 could be used here

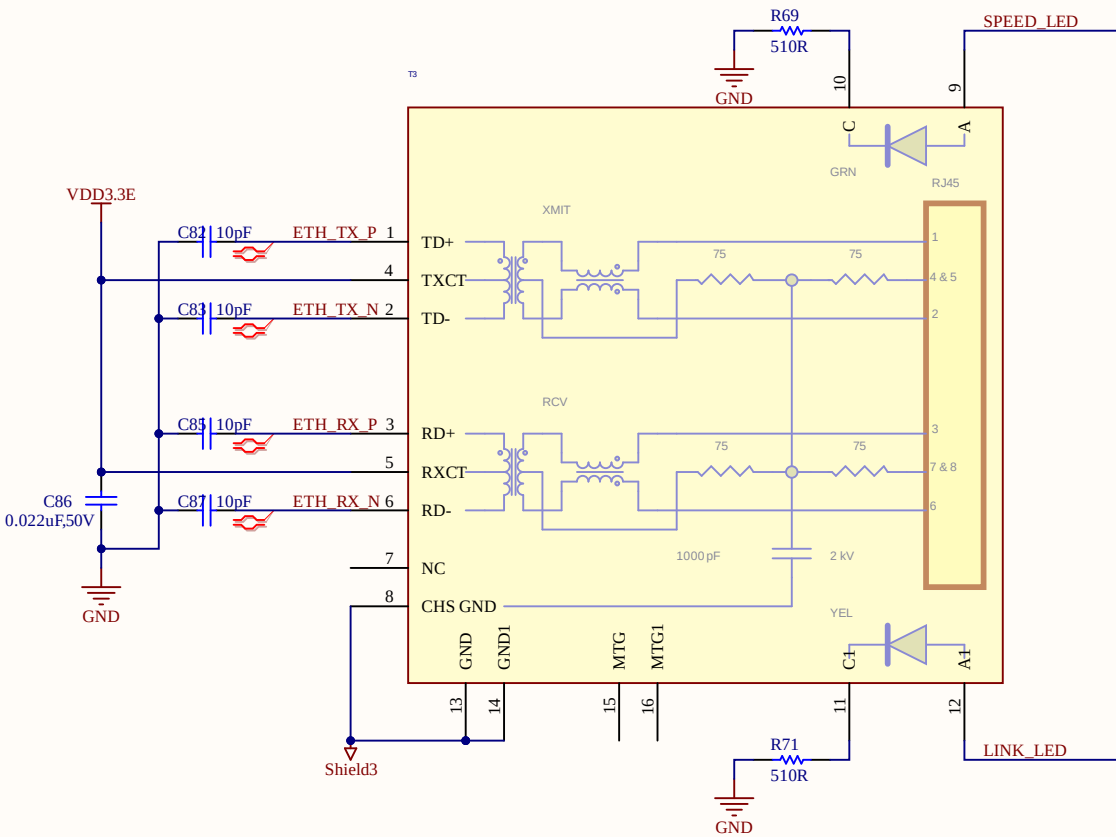

中核粒子	设计 ORIGINATOR -	本页名称 SHEET NAME Ethernet	名称 TITLE Title		图幅 SIZE A3	
	审核 REVIEW -					
	批准 APPROVE -	ECO XXXXXX	零件号 Part No. XX.XXX.XXXX	类型 TYPE CD	版本 REV XX.X	第 5 页 共 6 页

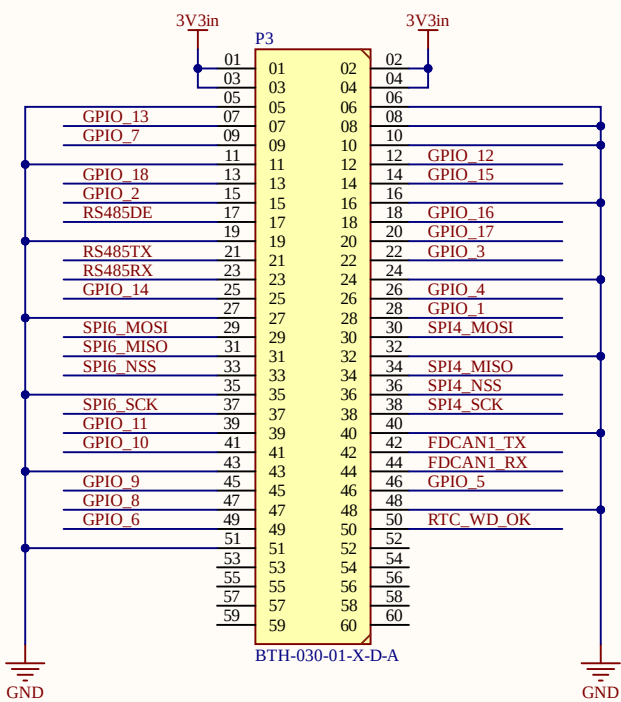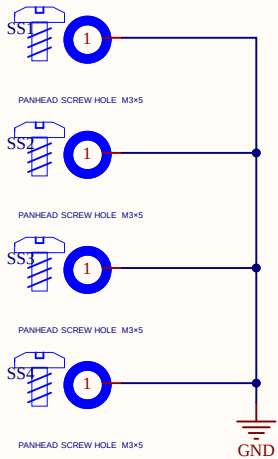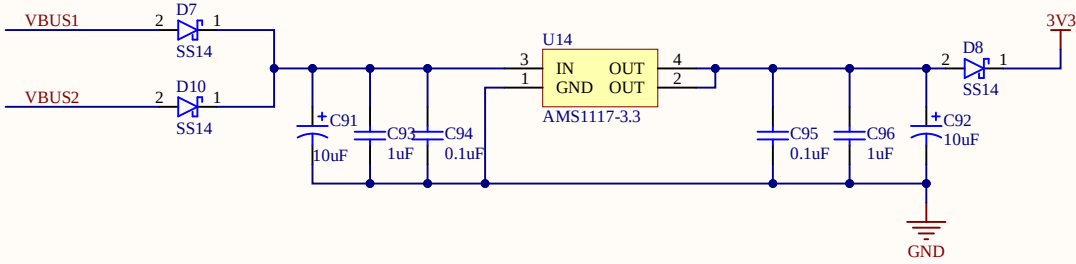

中核粒子	设计 ORIGINATOR -	本页名称 SHEET NAME power	名称 TITLE Title				图幅 SIZE A3
	审核 REVIEW -						
	批准 APPROVE -	ECO XXXXXX	零件号 Part No. XX.XXX.XXXX	类型 TYPE CD	版本 REV XX.X	第 6 页 共 6 页	