



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL \pm ANGULAR: MACH \pm BEND \pm TWO PLACE DECIMAL \pm THREE PLACE DECIMAL \pm INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL FINISH DO NOT SCALE DRAWING	DRAWN BY	J. Zorko	Cooper Machine Co.		
	DATE	12/17/2014			
	APPLICATION		TITLE: Chain Drive		
	NEXT ASSY	Eccentric			
		Headstock			
	SUBSYSTEM	Driveline	SIZE A	FILE NAME Eccentric Chain Drive	REV 2.0
	COMMENTS:		SCALE: 1:5	WEIGHT:	SHEET 1 OF 3

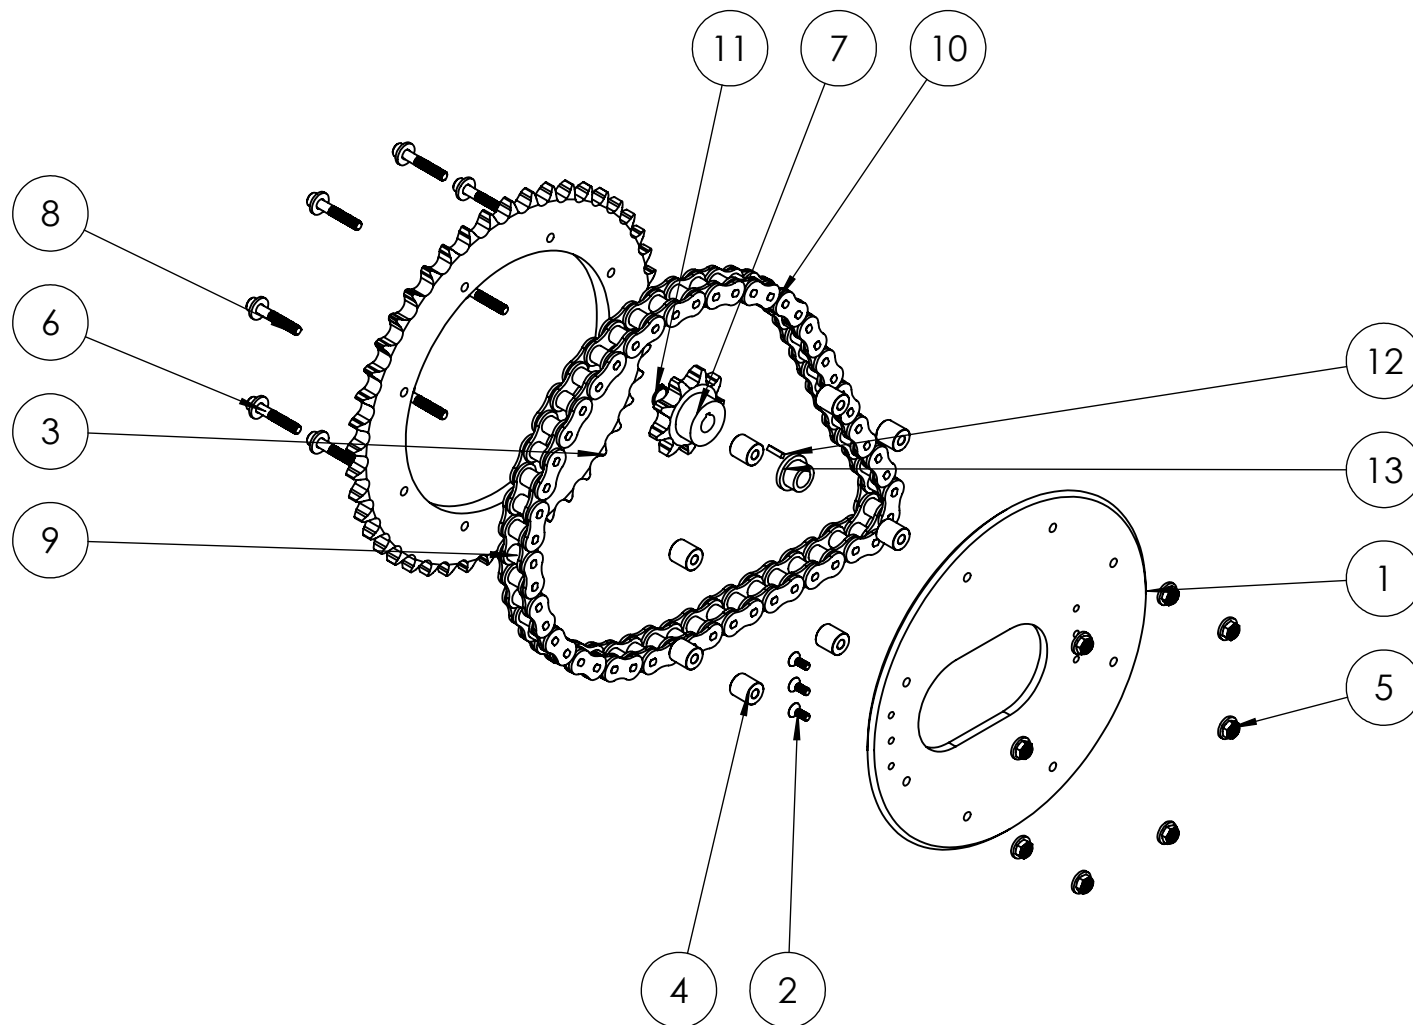

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	J. Zorko	Cooper Machine Co. TITLE: Chain Drive		
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	DATE	12/17/2014			
	APPLICATION				
	NEXT ASSY	Eccentric			
		Headstock			
INTERPRET GEOMETRIC TOLERANCING PER:					
MATERIAL	SUBSYSTEM	Driveline	SIZE	FILE NAME	REV
FINISH	COMMENTS:		A	Eccentric Chain Drive	2.0
DO NOT SCALE DRAWING			SCALE: 1:5	WEIGHT:	SHEET 2 OF 3

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	Spindle Carrier Rear Plate MKIII		1
2	10-32 - 0.5 - Countersunk Bolt		6
3	No. 60 Eccentric Drive Sprocket - 45T		1
4	Eccentric Drive - Spacer Bushing		8
5	1-4 28 Lo-Pro Nylock 94945A210		8
6	1 - 4 SAE Spec Flat Washer - 91950A029		16
7	No. 60 Eccentric Drive Sprocket - 9T		1
8	1-4 28 1.5 Socket Cap Bolt - 91251A446		8
9	No. 60 Roller Chain - Roller Half		26
10	No. 60 Roller Chain - Link Half		26
11	.5in snapping - 97633A200		1
12	Eccentric Drive Sprocket Key		1
13	Alloy 932 Sleeve Bearing - 7815K33		1

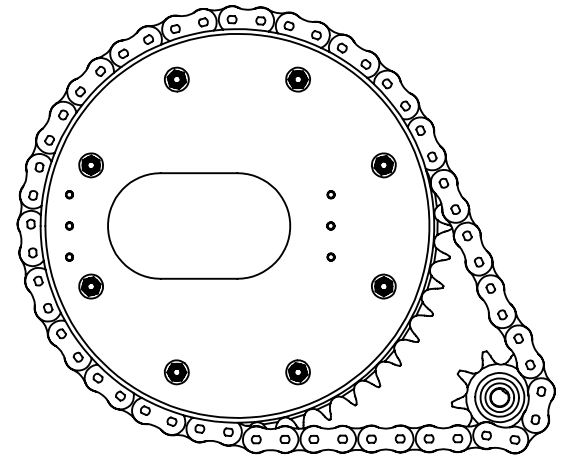

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	J. Zorko	Cooper Machine Co.		
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	DATE	12/17/2014			
	APPLICATION				
	NEXT ASSY	Eccentric			
		Headstock			
INTERPRET GEOMETRIC TOLERANCING PER:					
MATERIAL	SUBSYSTEM	Driveline	SIZE	FILE NAME	REV
FINISH	COMMENTS:		A	Eccentric Chain Drive	2.0
DO NOT SCALE DRAWING			SCALE: 1:5	WEIGHT:	SHEET 3 OF 3