




CONTACT US

louis@fahint.com

+86 18857349189

www.fahint.com

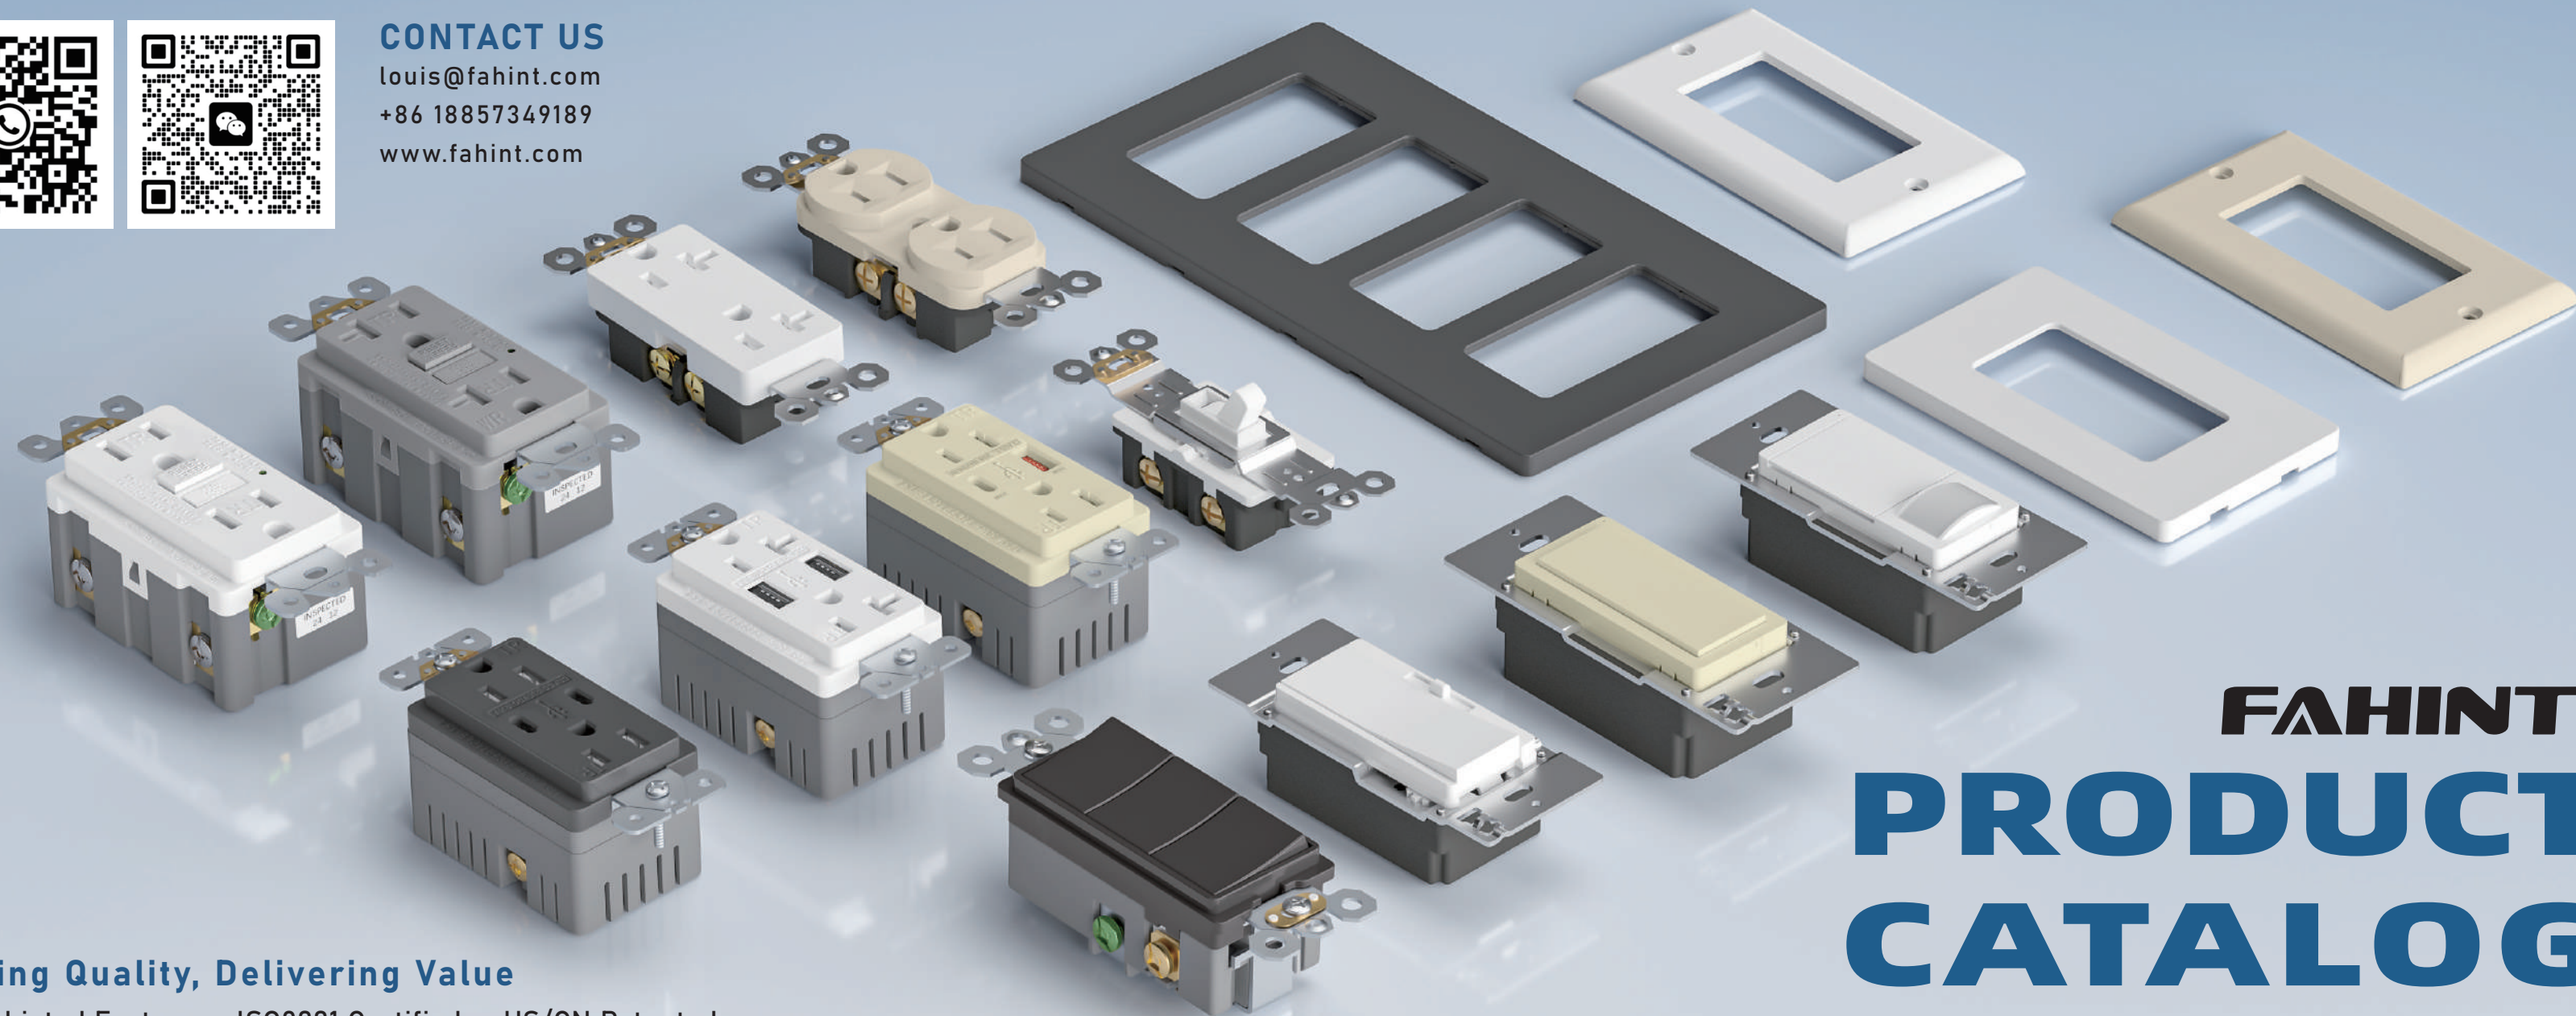

FAHINT[®] **PRODUCT** **CATALOG**

Crafting Quality, Delivering Value


UL/Cul Listed Factory ISO9001 Certified US/CN Patented

Wenzhou Fahint Electric Co., Ltd.

Located in Wenzhou, Zhejiang Province—a major industrial hub in Eastern China—we are a professional manufacturer specializing in American standard low voltage electrical switches and sockets. Our 70,000 square foot factory is strategically situated just 25 minutes from Wenzhou International Airport, facilitating efficient global logistics.



We hold patented technologies in both the U.S. and China, and our production systems are certified under UL, ETL, and ISO9001 standards. Our product range includes GFCI outlets, USB charging sockets, dimmer and sensor occupy switches, and other commercial/residential solutions.



Equipped with 12 automated inspection lines, we achieve a first pass yield exceeding 98%. All products come with a 3 year warranty.



Our experienced engineering team provides customized design solutions within 6 hours. Such as Individual Color Box Customized, Logo on Wall Plate, Logo on Top / Bottom Body, Color Customization for Wall Plates/covers/base (MOQ: 400 Cartons) Bracket Customized and so on.




To serve North American customers better, we maintain overseas warehouses, enabling shipment within 3 days and delivery in as fast as 10 days. With a decade of zero Category A complaints and recognition as an approved supplier for ALDI, we deliver trust and quality beyond industry standards.

Choose Fahint for innovative, reliable, and fast response electrical manufacturing!

SINCE 2015



Factory Environment

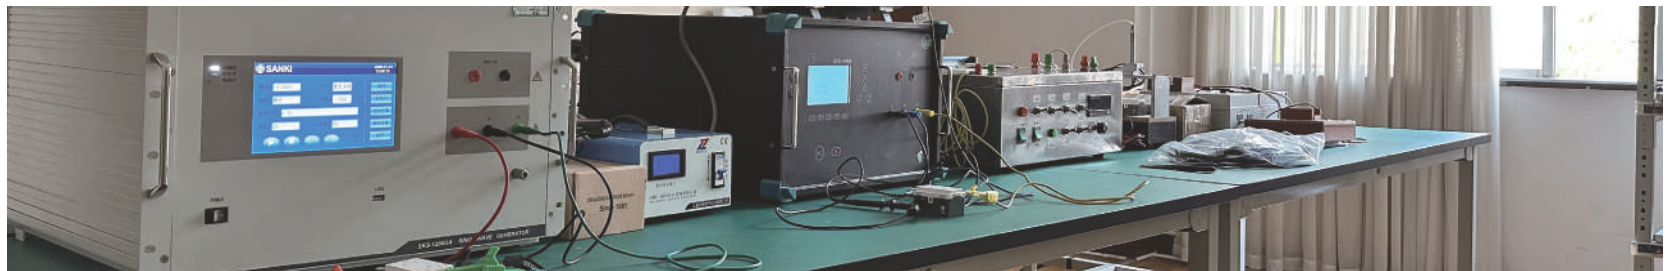

Enterprise Certification



YOUR COMPLETE WIRING DEVICE COLLECTION




Main products

- 01 GFCI Outlet**
Essential protection for kitchens and bathrooms
- 02 USB Outlet**
Charge devices faster, without the clutter
- 03 Dimmer & sensor switch**
Set the perfect mood with adjustable lighting
- 04 Standard Receptacle**
The reliable classic for every room
- 05 Smart Switch**
Voice control and scheduling at your command
- 06 Lighting Switches**
A style for every switch and every home
- 07 Wallplates**
Seamlessly blend style with safety

01

GFCI OUTLET

Ground Fault Circuit Interrupter, The critical first line of defense against electrical hazards in damp locations

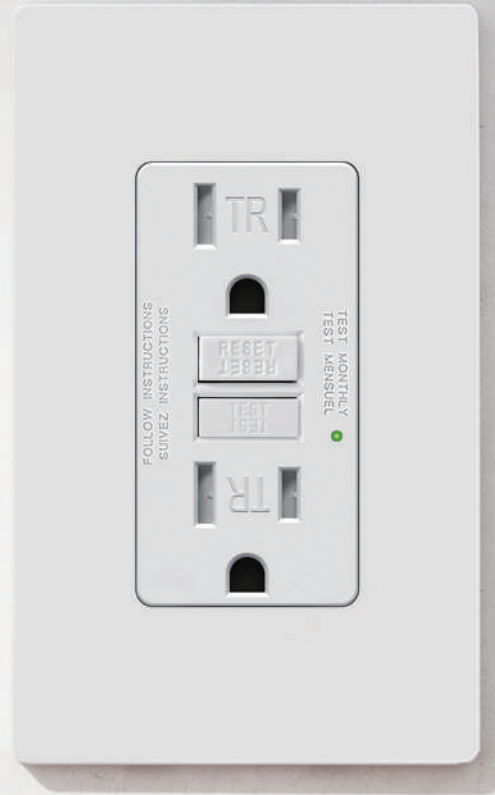

ITEM:GF15

Rating:15A,125V
NEMA:5-15R
Feature:Standard



ITEM:GF20

Rating:20A,125V
NEMA:5-20R
Feature:Standard



ITEM:GT15

Rating:15A,125V
NEMA:5-15R
Feature:TR



ITEM:GT20

Rating:20A,125V
NEMA:5-20R
Feature:TR



ITEM:GW15

Rating:15A,125V
NEMA:5-15R
Feature:TR&WR



ITEM:GW20

Rating:20A,125V
NEMA:5-20R
Feature:TR&WR



ITEM:GL20

Rating:20A,125V
NEMA: /
Feature:Blank face



ITEM:GTN15

Rating:15A,125V
NEMA:5-15R
Feature:Anti-Gasoline
&Anti-Vibrate



ITEM:GTN20


Rating:20A,125V
NEMA:5-20R
Feature:Anti-Gasoline
&Anti-Vibrate

○ White ● Ivory ● Almond ● Black ● Grey ● Brown ● Graphite

Residential Commercial

GF15/GF20/GT15/GT20/GW15/GW20/GL20


- UL/Cul listed E504391.
- Patent protected US/CN.
- Class A GFCI Trip threshold meets or exceeds UL require-ments for tripping time UL 943 5th Edition 2018.
- Mechanical structure ensures that the GFCI can be tripped powered off in any state.
- No power will be delivered to receptacle face if improperly wired (line-load reversed) and the GFCI can Reset for safety.
- Status Indicator Light provides simple,intuitive feedback on power and protection status.
- Impact-Resistant thermoplastic cover and body.
- Thickened silver contacts reducing temperature rise.
- Both 15A and 20A GFCI outlet with Fed Spec rating.

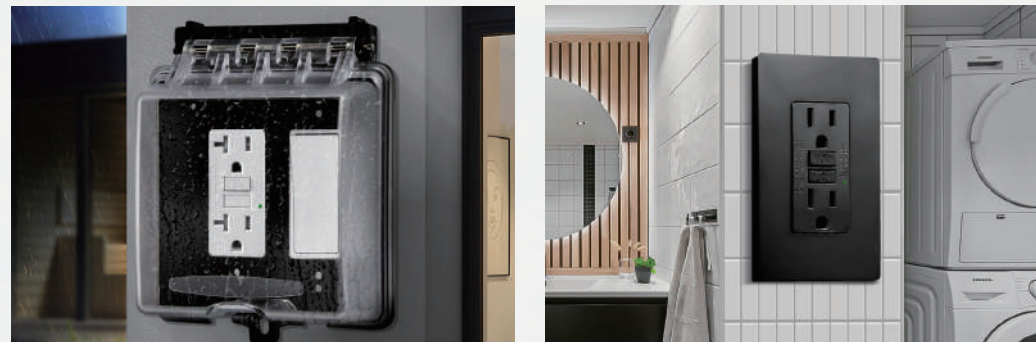


Industrial Grade

GTN15/GTN20

- UL/Cul listed E504391.
- Patent protected US/CN.
- PCB designed for Anti vibration;
- Nylon material made front cover and base as long as the buttons.
Design for industrial application such a generator, outdoor light;
- Special design on PCB board ensure the GFCI Anti high-frequency electromagnetic interference;
- No Feed-through terminals;
- Class A GFCI Trip threshold meets or exceeds UL requirements for tripping time UL 943 5th Edition 2018.
- Mechanical structure ensures that the GFCI can be tripped powered off in any state.
- No power will be delivered to receptacle face if improperly wired (line-load reversed) and the GFCI can Reset for safety.
- Status Indicator Light provides simple, intuitive feedback on power nd protection status.
- Impact-Resistant thermoplastic cover and body.
- Thickened silver contacts reducing temperature rise.
- Anti-Gasoline & Anti-Vibrate.
- Nylon material made front cover and base as long as the buttons.

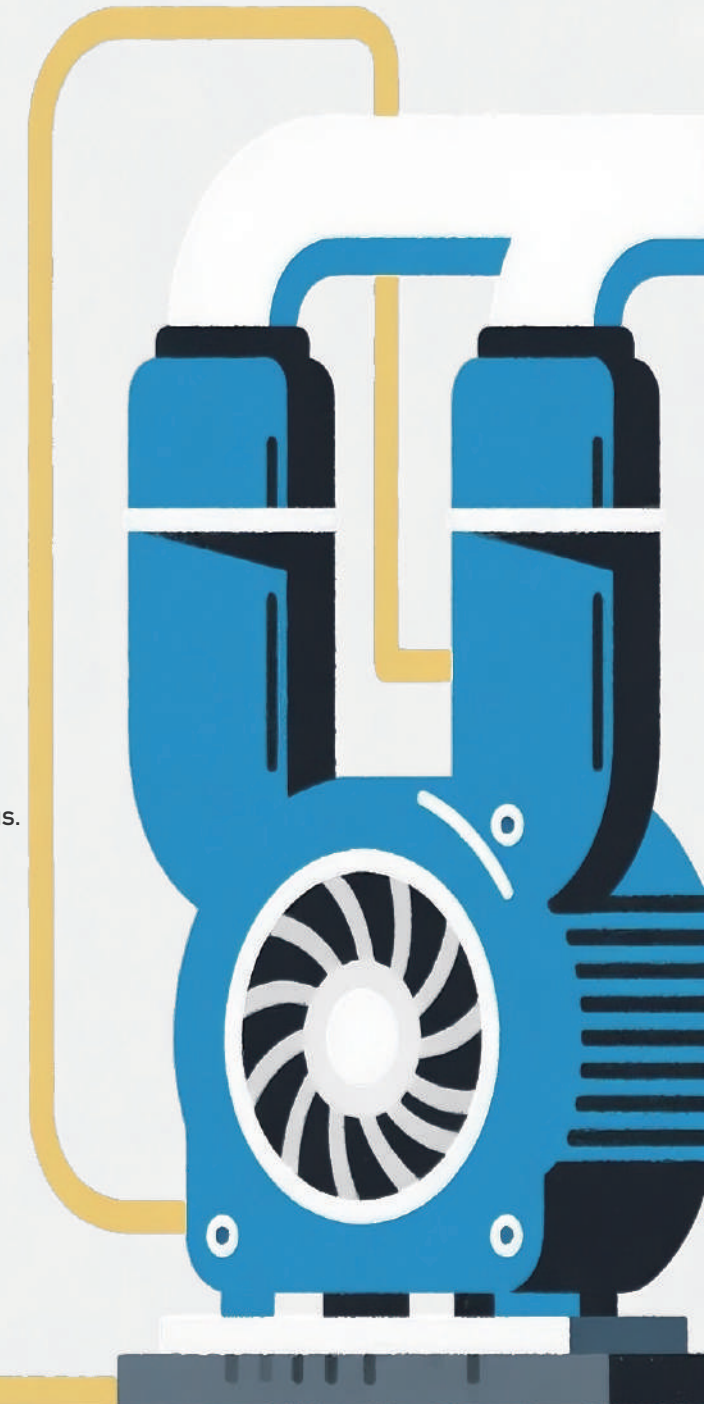

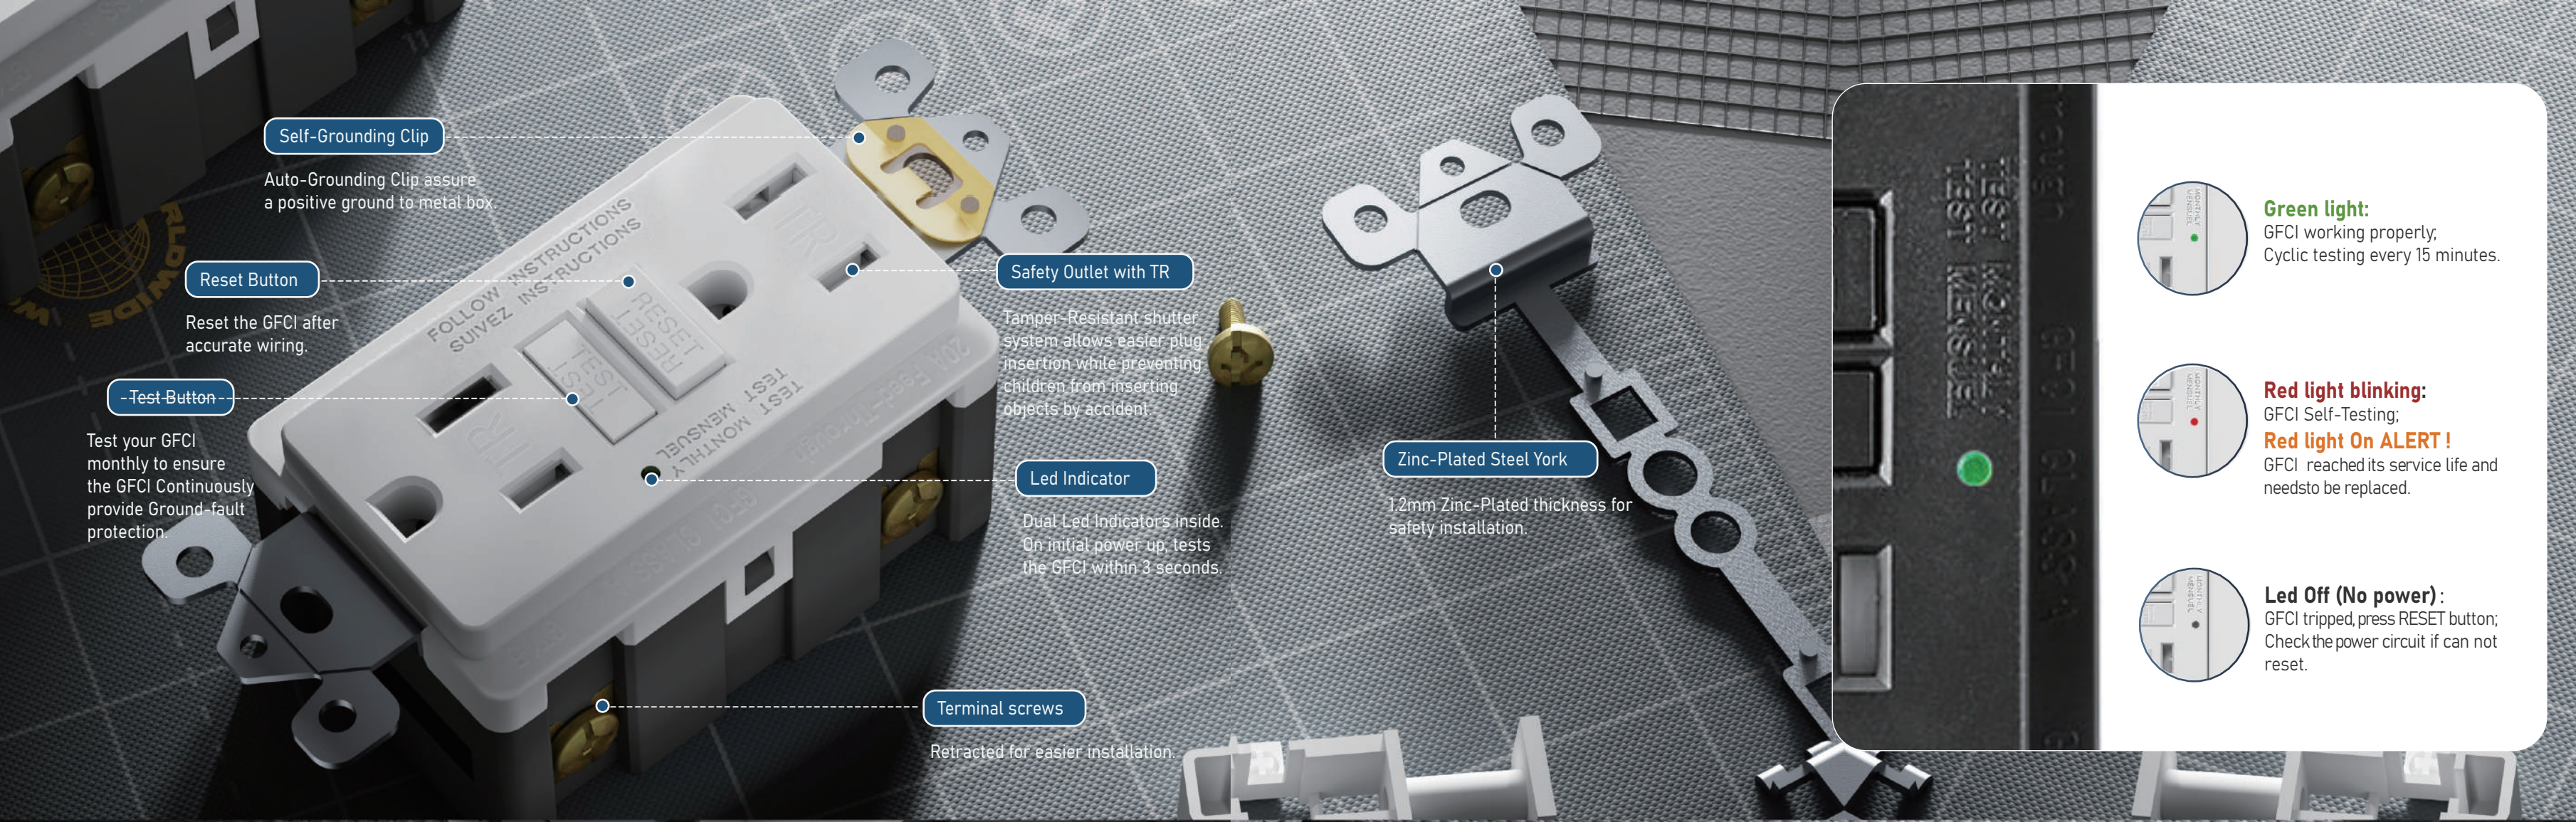

Tamper-Resistant Receptacles

- TR symbol assures compliance with the National Electrical Code (NEC)
- Shutter mechanism inside the receptacle blocks access to the contacts unless a two-prong or three-prong plug is inserted allowing electrical contacts.
- NEC® required mandating that all 15A and 20A receptacles installed in dwelling units be listed as tamper-resistant.



Weather-Resistant Receptacles

- Designed for wet and damp locations to meet the requirements of NEC Section 406.8
- Plastic material is UV resistant and Cold impact resistant include face and buttons.
- Special painting of circuit boards to ensure that critical electronic components are not affected by moisture.



Self-Test Function

- GFCI shall automatically conduct self-test every 15 minutes to ensure continuous protection.
- Auto-monitoring exceeds the UL requirement UL943 2018 version.
- On initial power up, tests the GFCI within 3 seconds.
- Enhanced Service Life led indicator lamp integrates two-color function:Green/Red.
- Strong anti-interference design.




Mis-Wire Protection

- No power to the face outlet or downstream receptacle if wired incorrectly.
- The green indicator on but GFCI out of power, and can not Reset, remind user wire the GFCI correctly.

Installation

Termination takes #12 or #14 AWG stranded or solid copper or copper-clad construction.


Insert wire to bottom of hole.

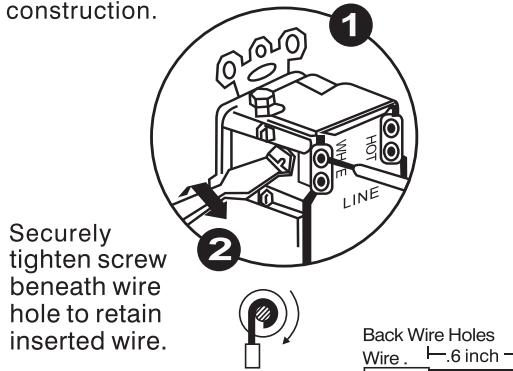


Twist Wire Clockwise, 2/3 of the way around screw.

GFCI INSTALL ALONE


Do not wire the LOAD terminal if GFCI installed independent

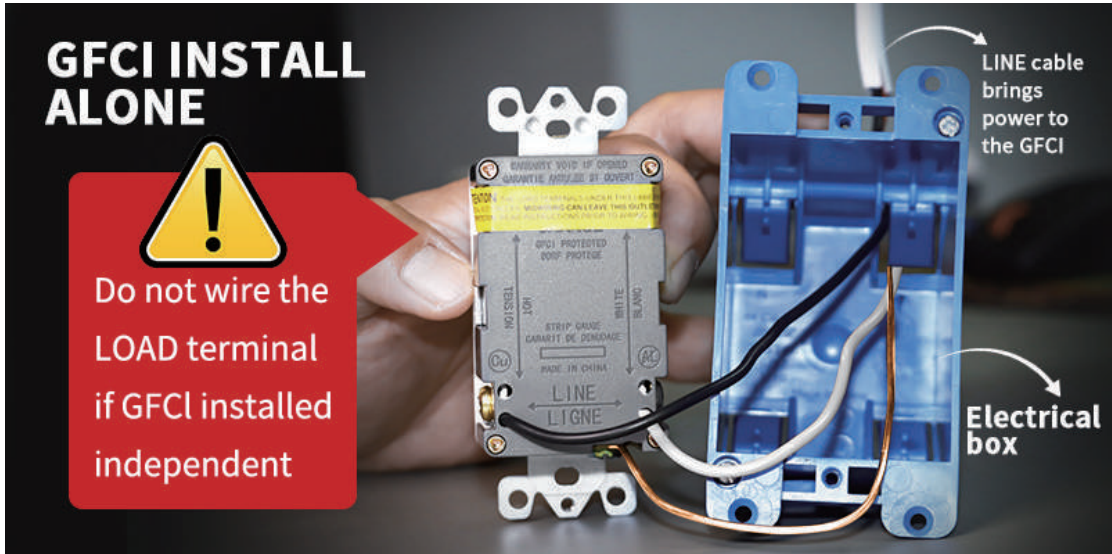


Product dimensions

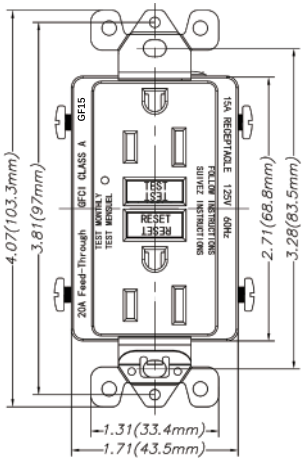


15A Self-Test GFCI

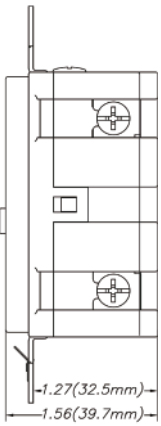

Side View

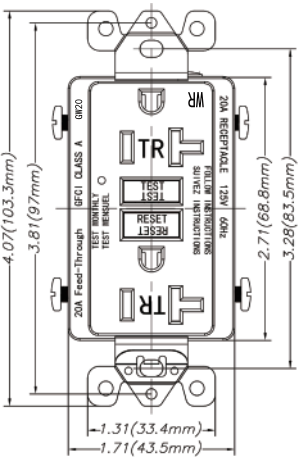

20A Self-Test GFCI

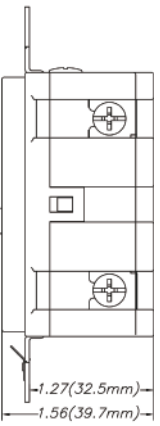

Side View

GFCI PROTECT OTHER OUTLET


LOAD cable feeds power to other receptacles

LINE cable brings power to the GFCI


Hot Wire (Black)

Neutral Wire (White)


Grounding wire (Bare copper)

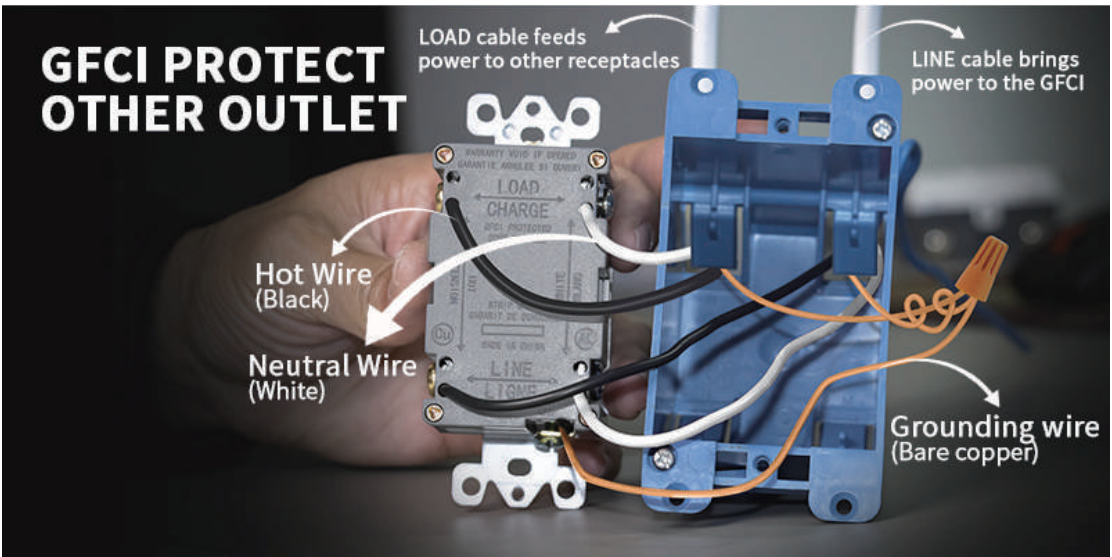


- Press Reset button after correct installation. The Green Led indicator on GFCI working properly.
- Test your GFCI monthly to ensure the GFCI continuously provide Ground-fault protection.
- Cyclic testing every 15 minutes.

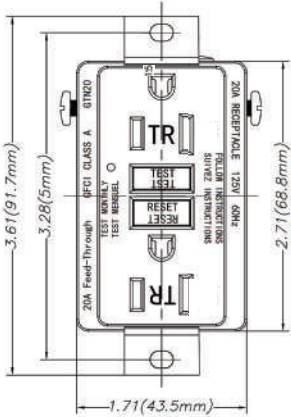


15A Industrial Grade GFCI

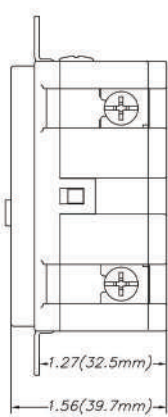

Side View

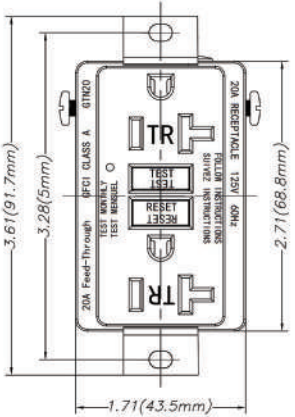

20A Industrial Grade GFCI

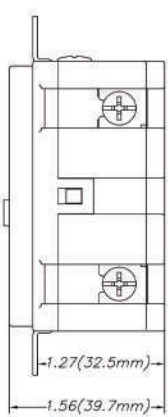

Side View

02

USB Outlet

Ultimate Charging Convenience:

Power your devices directly from the wall, eliminating bulky power adapters and freeing up outlet space.

High-Speed Charging:

Features intelligent technology to deliver an optimized, faster charge for phones, tablets, and other USB-powered devices.



3100mA

Conventional USB Outlet



ITEM	FTR15-3100	FTR15C-3100	FTR15DC-3100
USB Type	Type A + Type A	TypeA + Type C	Type C+Type C
USB Rating	5V 3.1A 15.5W		
Pole & Wire	2-Pole,3-Wire		
Charging Protocol	BC1.2 Apple/Samsung		
NEMA	5-15R	5-15R	5-15R
Quick Charging	x		



ITEM	FTR20-3100	FTR20C-3100	FTR20DC-3100
USB Type	Type A + Type A	TypeA + Type C	Type C+Type C
USB Rating	5V 3.1A 15.5W		
Pole & Wire	2-Pole,3-Wire		
Charging Protocol	BC1.2 Apple/Samsung		
NEMA	5-20R	5-20R	5-20R
Quick Charging	x		

3600mA

Conventional USB Outlet



ITEM	FTR15-3600	FTR15C-3600	FTR15DC-3600
USB Type	Type A + Type A	TypeA + Type C	Type C+Type C
USB Rating	5V 3.6A 18W		
Pole & Wire	2-Pole,3-Wire		
Charging Protocol	BC1.2 Apple/Samsung		
NEMA	5-15R	5-15R	5-15R
Quick Charging	x		



ITEM	FTR20-3600	FTR20C-3600	FTR20DC-3600
USB Type	Type A + Type A	TypeA + Type C	Type C+Type C
USB Rating	5V 3.6A 18W		
Pole & Wire	2-Pole,3-Wire		
Charging Protocol	BC1.2 Apple/Samsung		
NEMA	5-20R	5-20R	5-20R
Quick Charging	x		

4200mA

Conventional USB Outlet



ITEM	FTR15-4200	FTR15C-4200	FTR15DC-4200
USB Type	Type A + Type A	TypeA + Type C	Type C+Type C
USB Rating	5V 4.2A 21W		
Pole & Wire	2-Pole,3-Wire		
Charging Protocol	BC1.2 Apple/Samsung		
NEMA	5-15R	5-15R	5-15R
Quick Charging	×		




ITEM	FTR20-4200	FTR20C-4200	FTR20DC-4200
USB Type	Type A + Type A	TypeA + Type C	Type C+Type C
USB Rating	5V 4.2 21W		
Pole & Wire	2-Pole,3-Wire		
Charging Protocol	BC1.2 Apple/Samsung		
NEMA	5-20R	5-20R	5-20R
Quick Charging	×		

4200mA

4 Ports USB Outlet



ITEM	F4P
USB Type	4 Type A Port
USB Rating	5V 4.2A 21W
Pole & Wire	/
Charging Protocol	BC1.2 Apple/Samsung
NEMA	/
Quick Charging	×

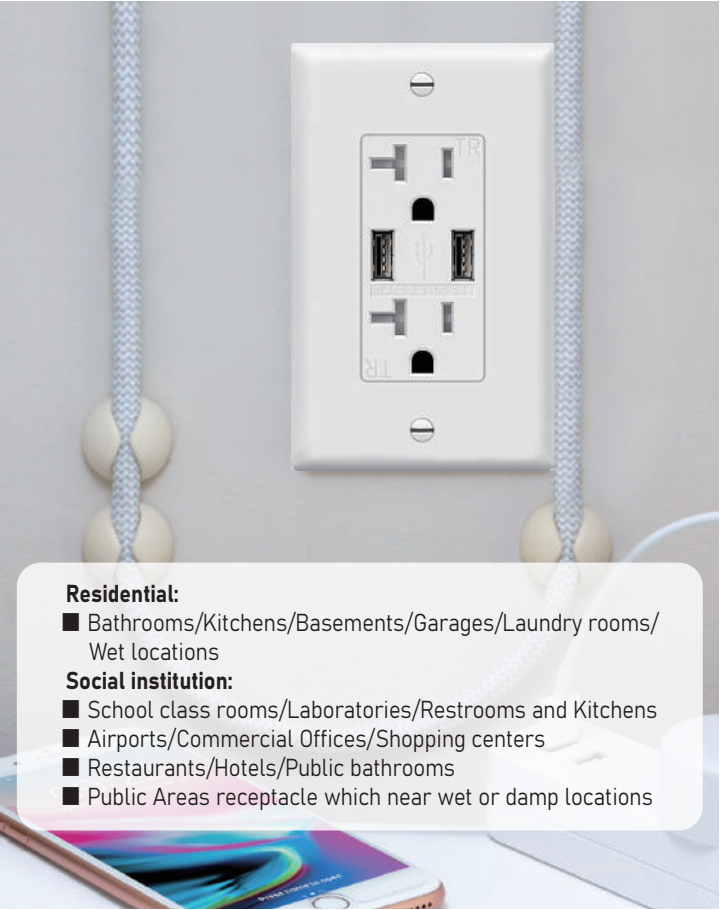

- Residential:**
- Bathrooms/Kitchens/Basements/Garages/Laundry rooms/ Wet locations
- Social institution:**
- School class rooms/Laboratories/Restrooms and Kitchens
 - Airports/Commercial Offices/Shopping centers
 - Restaurants/Hotels/Public bathrooms
 - Public Areas receptacle which near wet or damp locations



5000mA

High-Rated USB Outlet



ITEM	FTR15	FTR15C	FTR15DC
USB Type	Type A + Type A	TypeA + Type C	Type C+Type C
USB Rating	5V 5.0A 25W		
Pole & Wire	2-Pole,3-Wire		
Charging Protocol	BC1.2 Apple/Samsung		
NEMA	5-15R	5-15R	5-15R
Quick Charging	×		



ITEM	FTR20	FTR20C	FTR20DC
USB Type	Type A + Type A	TypeA + Type C	Type C+Type C
USB Rating	5V 5.0A 25W		
Pole & Wire	2-Pole,3-Wire		
Charging Protocol	BC1.2 Apple/Samsung		
NEMA	5-20R	5-20R	5-20R
Quick Charging	×		

PD20W

Quick Charge USB Outlet



ITEM	FTR15QC AC 20W	FTR15QC DC 20W
USB Type	TypeA + Type C	Type C+Type C
USB Rating	Type A 18W : 5V/3A; 9V/2A; 12V/1.5A Type C 20W : 5V/3A; 9V/2.22A; 12V/1.67A;	
Pole & Wire	2-Pole,3-Wire	
Charging Protocol	PD20/3.0/PPS QC3.0/QC2.0 FCP/SCP/HVSCP/ Samsung AFC /BC12/DCP Apple 2.4A	
NEMA	5-15R	5-15R
Quick Charging	✓	



ITEM	FTR20QC AC 20W	FTR20QC DC 20W
USB Type	TypeA + Type C	Type C+Type C
USB Rating	Type A 18W : 5V/3A; 9V/2A; 12V/1.5A Type C 20W : 5V/3A; 9V/2.22A; 12V/1.67A;	
Pole & Wire	2-Pole,3-Wire	
Charging Protocol	PD20/3.0/PPS QC3.0/QC2.0 FCP/SCP/HVSCP/ Samsung AFC /BC12/DCP Apple 2.4A	
NEMA	5-20R	5-20R
Quick Charging	✓	

GaN. Power,
Redefined.



- Military grade
- Cooler & More Efficient
- Faster Charging
- The Next Generation of Power

Experience the Future of Energy

PD36W
&
PD65W

PD36W

Quick Charge USB Outlet



ITEM	FTR15QC AC 36W	FTR15QC DC 36W
USB Type	TypeA + Type C	Type C+Type C
USB Rating	Type A 18W : 5V/3A; 9V/2A; 12V/1.5A Type C 36W : 5V/3A; 9V/3A; 12V/3A; 15V/2.4A; 20V/1.8A	
Pole & Wire	2-Pole,3-Wire	
Charging Protocol	PD20/3.0/PPS QC3.0/QC2.0 FCP/SCP/HVSCP/ Samsung AFC /BC12 /DCP Apple 2.4A	
NEMA	5-15R	5-15R
Quick Charging	✓	



ITEM	FTR20QC AC 36W	FTR20QC DC 36W
USB Type	TypeA + Type C	Type C+Type C
USB Rating	Type A 18W : 5V/3A; 9V/2A; 12V/1.5A Type C 36W : 5V/3A; 9V/3A; 12V/3A; 15V/2.4A; 20V/1.8A	
Pole & Wire	2-Pole,3-Wire	
Charging Protocol	PD20/3.0/PPS QC3.0/QC2.0 FCP/SCP/HVSCP/ Samsung AFC /BC12 /DCP Apple 2.4A	
NEMA	5-20R	5-20R
Quick Charging	✓	

PD65W

Quick Charge USB Outlet



ITEM	FTR15QC AC 65W	FTR15QC DC 65W
USB Type	TypeA + Type C	Type C+Type C
USB Rating	Type A 18W: 5V/3A; 9V/2A; 12V/1.5A Type C 65W: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A	
Pole & Wire	2-Pole,3-Wire	
Charging Protocol	PD20/3.0/PPS QC3.0/QC2.0 FCP/SCP/HVSCP/ Samsung AFC /BC12 /DCP Apple 2.4A	
NEMA	5-15R	5-15R
Quick Charging	✓	




ITEM	FTR20QC AC 65W	FTR20QC DC 65W
USB Type	TypeA + Type C	Type C+Type C
USB Rating	Type A 18W: 5V/3A; 9V/2A; 12V/1.5A Type C 65W: 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A	
Pole & Wire	2-Pole,3-Wire	
Charging Protocol	PD20/3.0/PPS QC3.0/QC2.0 FCP/SCP/HVSCP/ Samsung AFC /BC12 /DCP Apple 2.4A	
NEMA	5-20R	5-20R
Quick Charging	✓	

Installation



Termination takes #12 or #14 AWG stranded or solid copper or copper-clad construction.

Insert wire to bottom of hole.

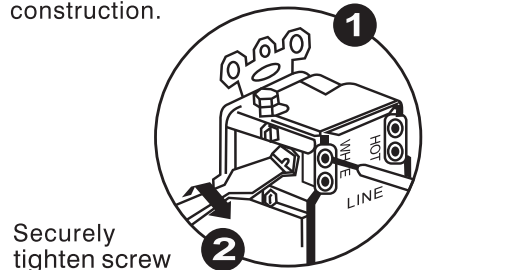

Securely tighten screw beneath wire hole to retain inserted wire.


Twist Wire Clockwise, 2/3 of the way around screw.

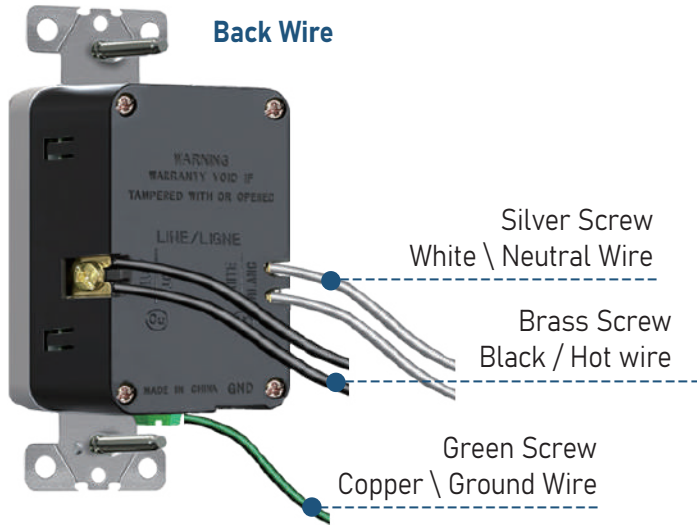


Charge Outlet



USB Ports

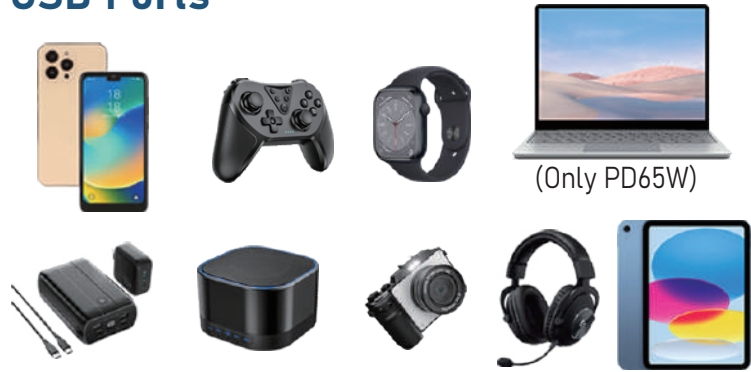


Product dimensions

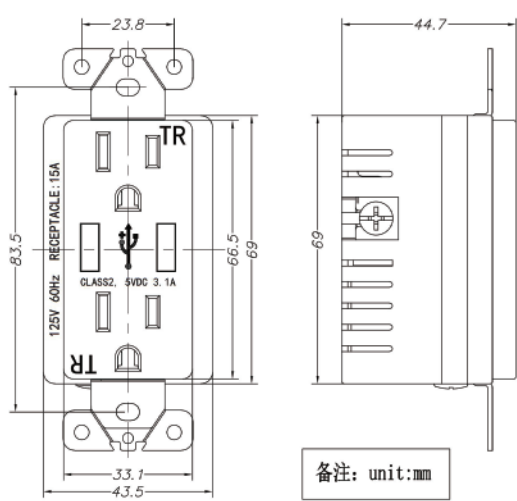


FTR15-3100

Side View

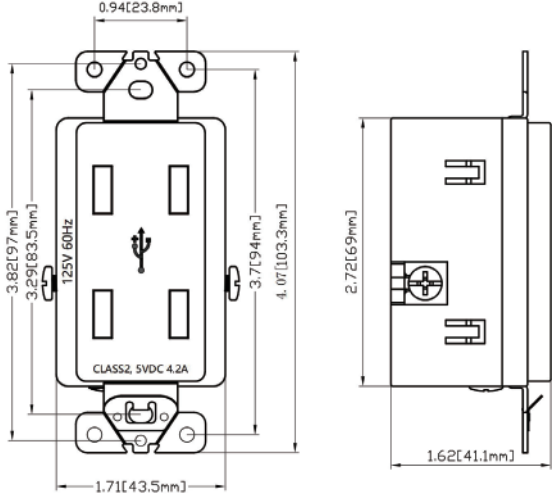


F4P

Side View

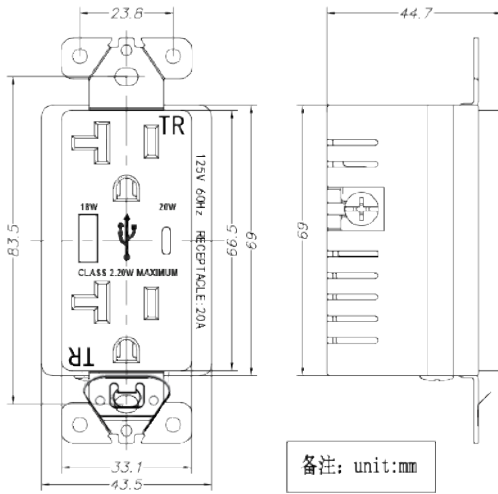

FTR20QC AC 20W

Side View

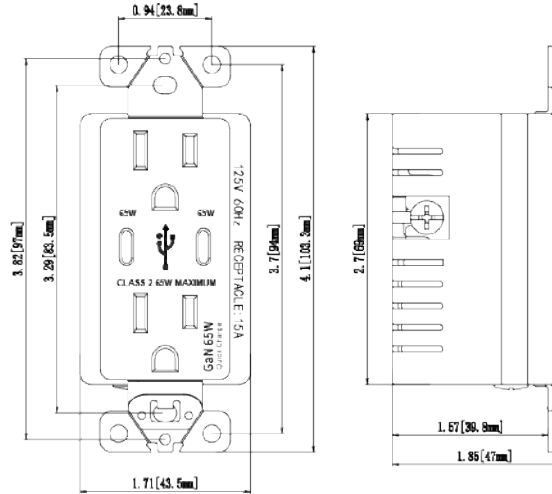

FTR15QC AC 65W

Side View

03

Dimmer & sensor switch

Effortlessly control your lighting to create the ideal mood for any occasion—from bright task lighting to a soft, relaxing glow.


**ITEM:DM2010**

Digital Dimmer Light Switch
Single pole / 3-ways
Mode:ON-OFF Slide Dimmer
Current Rating:5 Amps
Operating Voltage:120V AC 60Hz
Rating Wattage:Incandescent 20W~600W,
LED/CFL 5W~200W

**ITEM:DM2010S 0-10V**


Digital Dimmer Light Switch
Single pole / 3-ways
Mode:ON-OFF Slide Dimmer
Current Rating:120VAC/5A 277VAC/2A
Operating Voltage:120/277V AC 60Hz
Rating Wattage:600VA Maximum

-
- White ● Ivory ● Almond ● Black
● Grey ● Brown ● Graphite

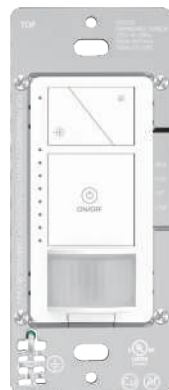

ITEM:SD3030

Dimmer & Sensor Switch
Single pole / 3-ways
Mode:PIR 140°Detection Angle
Current Rating:5 Amps
Operating Voltage:120V AC 60Hz
Rating Wattage:Incandescent 20W~600W,
LED/CFL 5W~200W
Wiring Method:Live Wire only

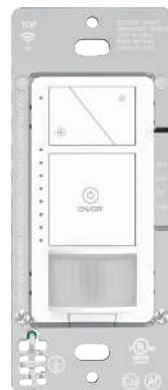

ITEM:SSD3030

Smart Dimmer & Sensor Switch
Single pole / 3-ways
Mode:Wireless or Manual
Current Rating:5 Amps
Operating Voltage:120V AC 60Hz
Rating Wattage:Incandescent 20W~600W,
LED/CFL 5W~200W
Wiring Method:Live + Neutral Wire



ITEM:DL3010

Digital Dimmer Light Switch
Single pole / 3-ways
Mode:ON/OFF Push Button Dimmer
Current Rating:5 Amps
Operating Voltage:120V AC 60Hz
Rating Wattage:Incandescent 20W~600W,
LED/CFL 5W~200W
Wiring Method:Live Wire only



ITEM:SDL3010

Smart Push Button Dimmer Switch
Single pole / 3-ways
Mode:Wireless or Manual
Current Rating:5 Amps
Operating Voltage:120V AC 60Hz
Rating Wattage:Incandescent 20W~600W,
LED/CFL 5W~200W
Wiring Method:Live + Neutral Wire



ITEM:SP3020


Sensor Occupancy Switch
Single pole
Mode:PIR 140°Detection Angle
Current Rating:5 Amps
Operating Voltage:120V AC 60Hz
Rating Wattage:Incandescent 10A/1000W,
LED/CFL 8A/1000W
Wiring Method:Live Wire only



ITEM:SSM2010

Smart Push Button Decora Switch
Single pole / 3-ways
Mode:Wireless or Manual
Current Rating:10 Amps
Operating Voltage:120/277V AC 60Hz
Rating Wattage:Incandescent 10A/1000W,
LED/CFL 8A/1000W
Wiring Method:Live + Neutral Wire


Smooth Dimmer

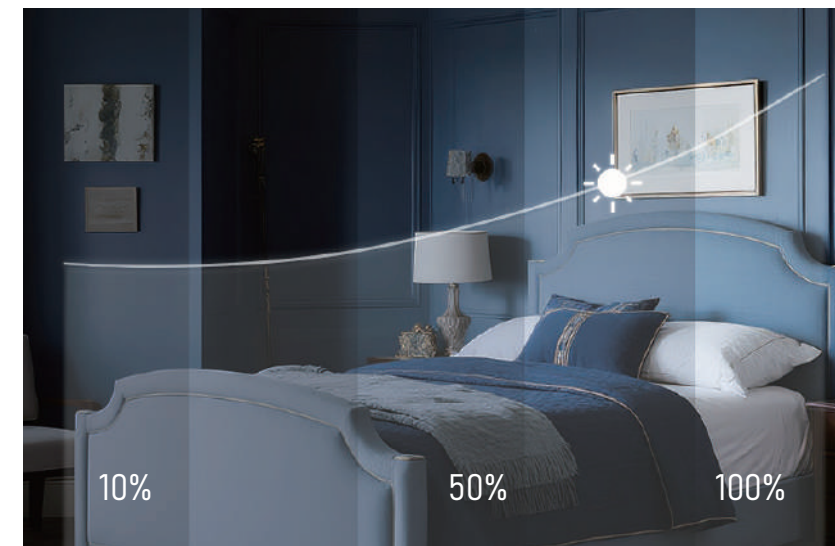

Human Body Sensing



Smart Connection

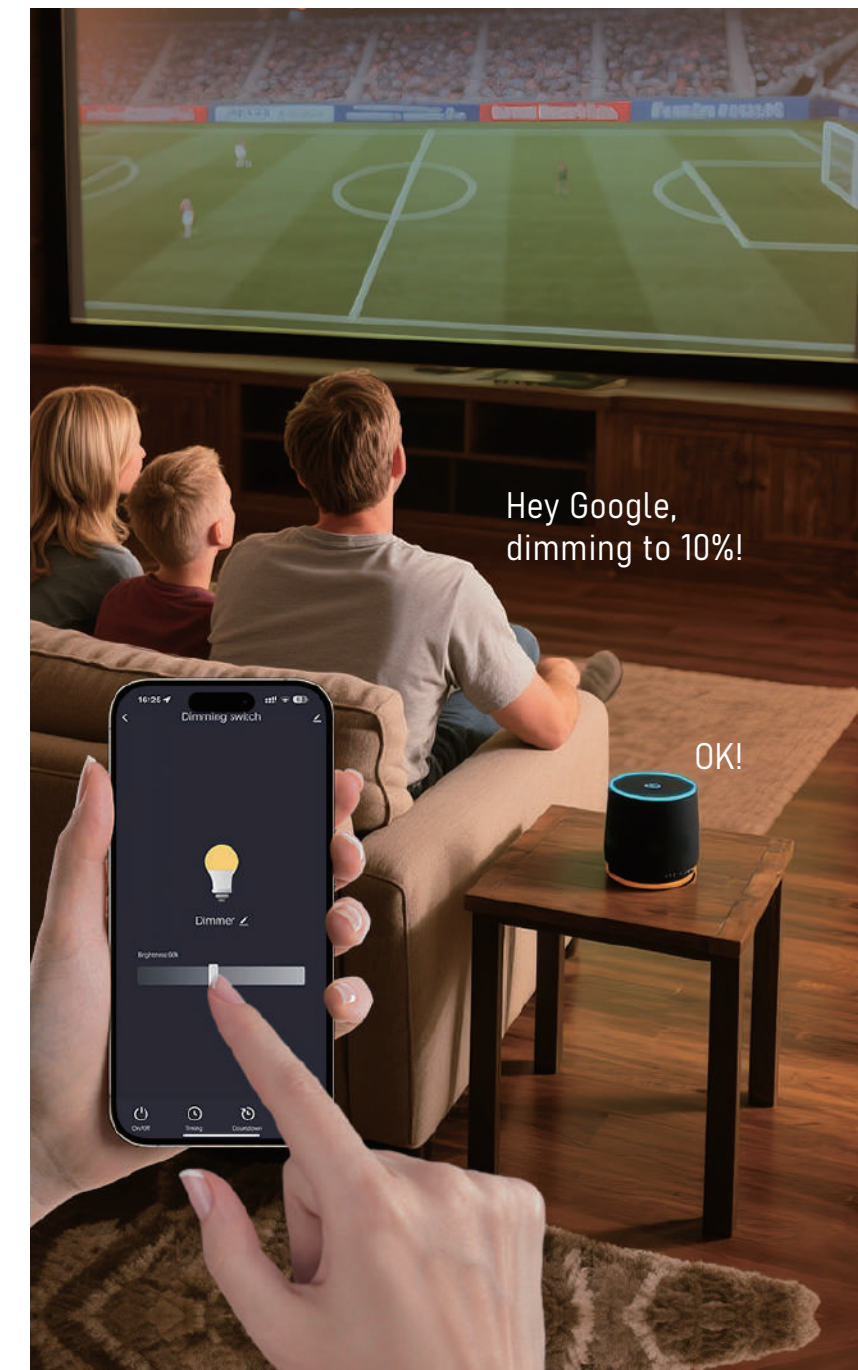

Standard Receptacles

Universal compatibility with various household devices, appliances, and electronic products



Standard Duplex Receptacles

Matte



Feature:Standard Rating:15A,125V

ITEM:R15

Wiring Type:Side Wire/ Back Wire

ITEM:R15Q

Wiring Type:Side Wire/ Push-In Quick Wire



ITEM:R20

Wiring Type:
Side Wire/ Back Wire

Feature:Standard
Rating:20A,125V



Feature:TR Rating:15A,125V

ITEM:RT15

Wiring Type:Side Wire/ Back Wire

ITEM:RT15Q

Wiring Type:Side Wire/ Push-In Quick Wire



ITEM:RT20

Wiring Type:
Side Wire/ Back Wire

Feature:TR
Rating:20A,125V



Feature:TR&WR Rating:15A,125V

ITEM:RW15

Wiring Type:Side Wire/ Back Wire

ITEM:RW15Q

Wiring Type:Side Wire/ Push-In Quick Wire



ITEM:RW20

Wiring Type:
Side Wire/ Back Wire

Feature:TR&WR
Rating:20A,125V

Decora Receptacles

Glossy/Matte



Feature:Standard Rating:15A,125V

ITEM:D15

Wiring Type:Side Wire/ Back Wire

ITEM:D15Q

Wiring Type:Side Wire/ Push-In Quick Wire



Feature:TR Rating:15A,125V

ITEM:DT15

Wiring Type:Side Wire/ Back Wire

ITEM:DT15Q

Wiring Type:Side Wire/ Push-In Quick Wire




Feature:TR&WR Rating:15A,125V

ITEM:DW15

Wiring Type:Side Wire/ Back Wire

ITEM:DW15Q

Wiring Type:Side Wire/ Push-In Quick Wire

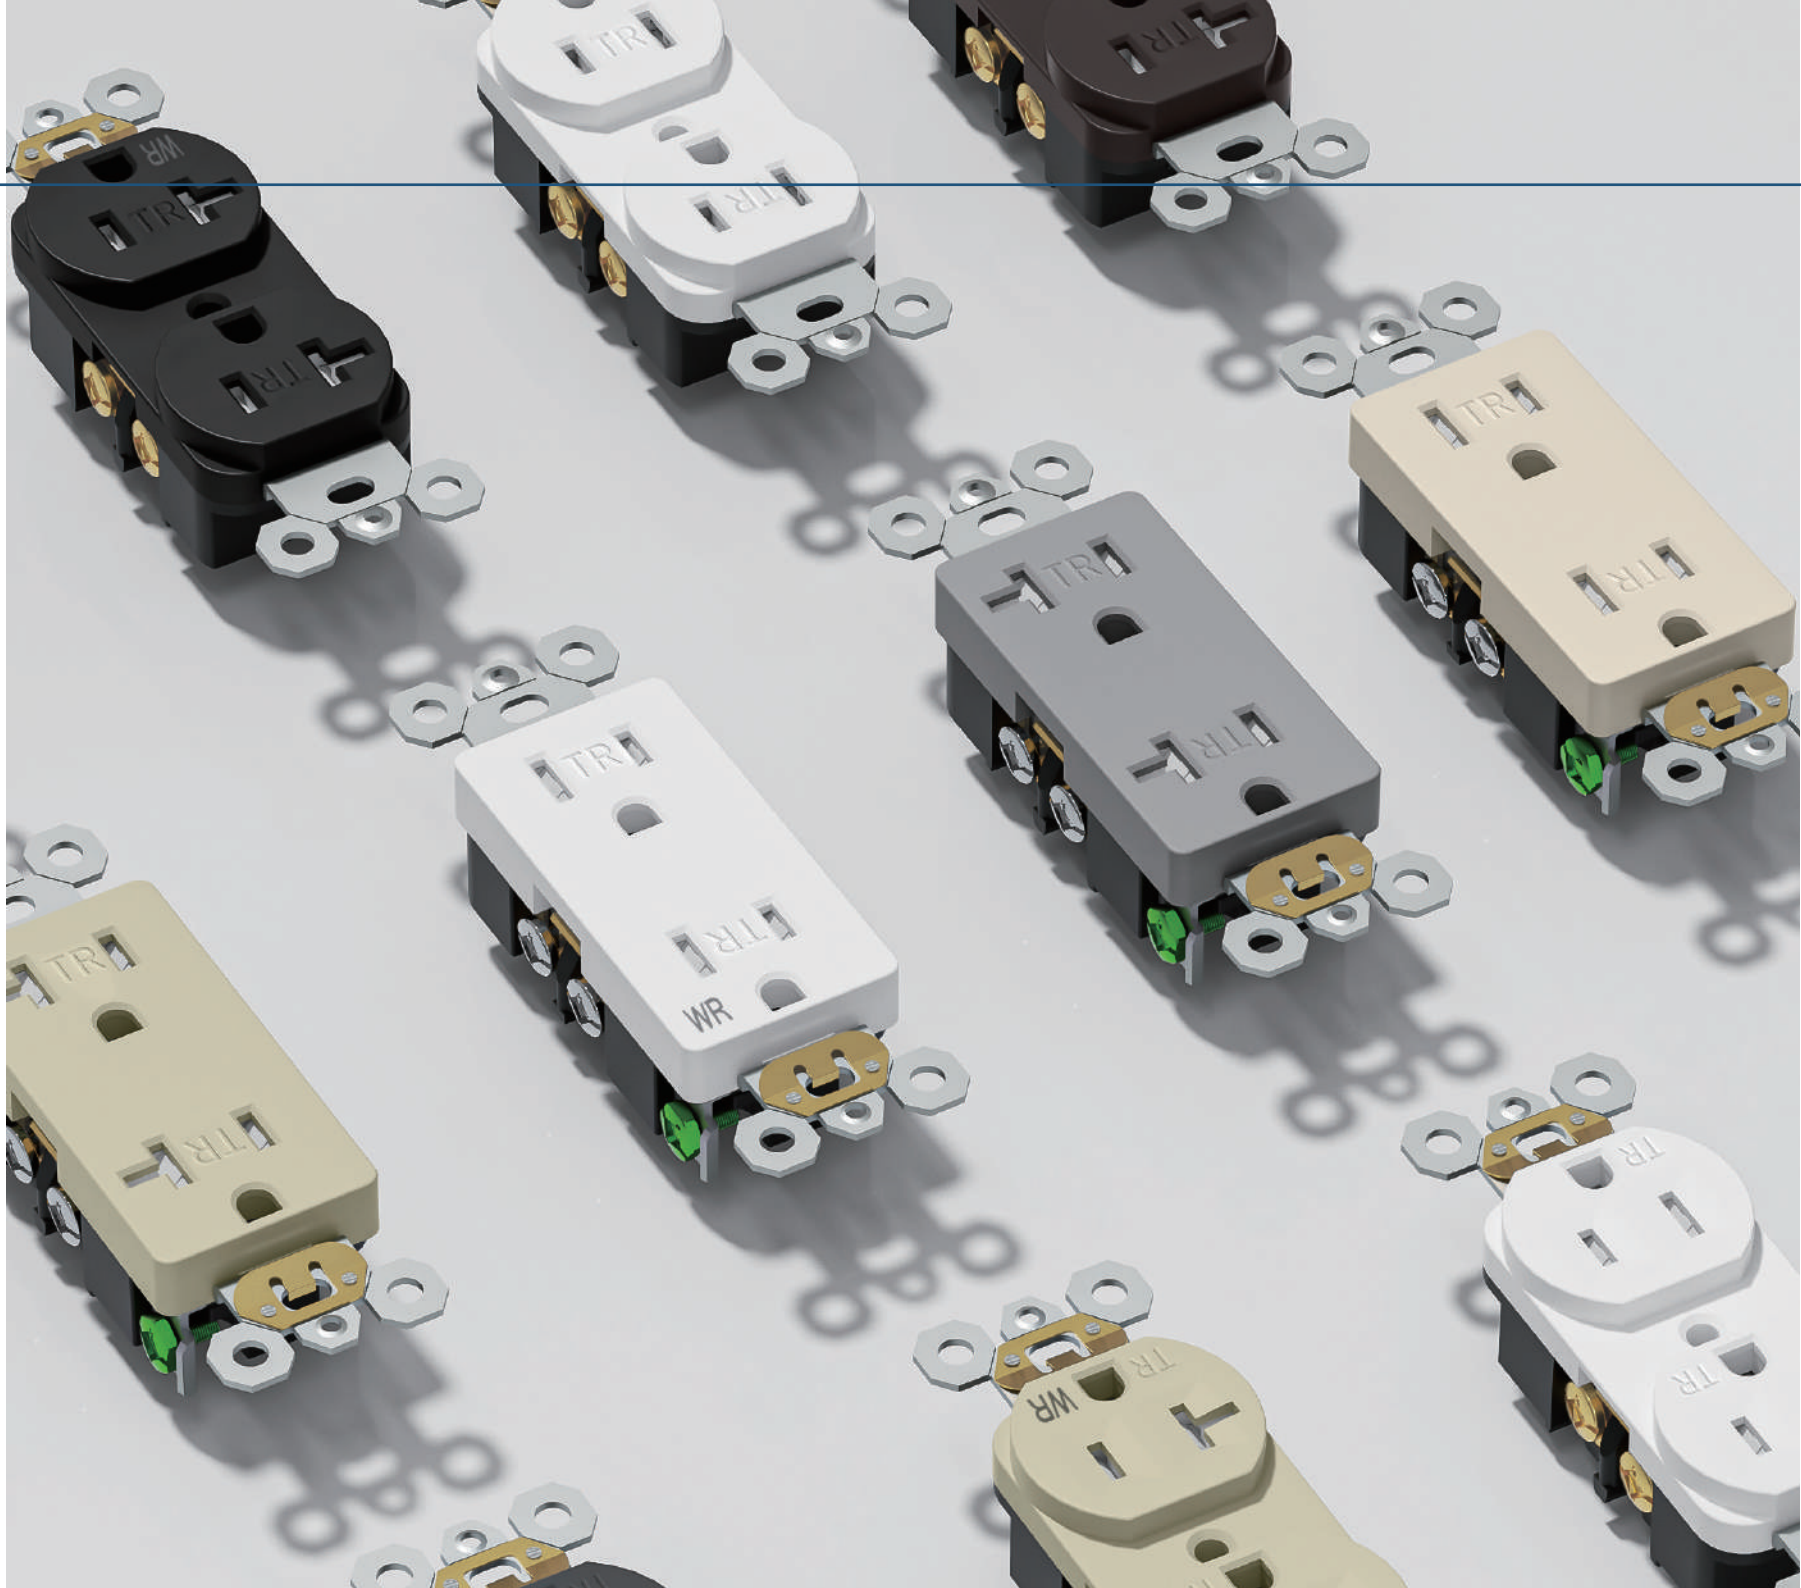

ITEM:D20

Wiring Type:
Side Wire/ Back Wire

Feature:Standard
Rating:20A,125V



ITEM:DT20

Wiring Type:
Side Wire/ Back Wire

Feature:TR
Rating:20A,125V



ITEM:DW20

Wiring Type:
Side Wire/ Back Wire

Feature:TR&WR
Rating:20A,125V

Commerical Duplex Receptacles

Matte



Feature:Standard Rating:15A,125V

ITEM:C15

Wiring Type:Side Wire/ Back Wire

ITEM:C15Q

Wiring Type:Side Wire/ Push-In Quick Wire



ITEM:C20

Wiring Type:
Side Wire/ Back Wire

Feature:Standard
Rating:20A,125V



Feature:TR Rating:15A,125V

ITEM:CT15

Wiring Type:Side Wire/ Back Wire

ITEM:CT15Q

Wiring Type:Side Wire/ Push-In Quick Wire



ITEM:CT20

Wiring Type:
Side Wire/ Back Wire

Feature:TR
Rating:20A,125V



Feature:TR&WR Rating:15A,125V

ITEM:CW15

Wiring Type:Side Wire/ Back Wire

ITEM:CW15Q

Wiring Type:Side Wire/ Push-In Quick Wire



ITEM:CW20

Wiring Type:
Side Wire/ Back Wire

Feature:TR&WR
Rating:20A,125V

Industrial Grade Duplex Receptacles

Matte



ITEM:CR15

Wiring Type:
Side Wire/ Back Wire

Feature:Standard
Rating:15A 125V/250V



ITEM:CR20

Wiring Type:
Side Wire/ Back Wire

Feature:Standard
Rating:20A 125V/250V



ITEM:CD20

Wiring Type:
Side Wire/ Back Wire

Feature:Standard
Rating:20A 125V/250V



Weather-Resistant Receptacles

Rain or Shine. Uncompromising Performance.




Tamper-Resistant Receptacles

Child Safety. Worry-Free Peace of Mind





The Designer's Palette


Every detail matters in great design. Our spectrum of seven sophisticated finishes allows architects, designers, and homeowners to perfect their palette, ensuring that every element—even the outlets—contributes to a cohesive and elevated aesthetic.

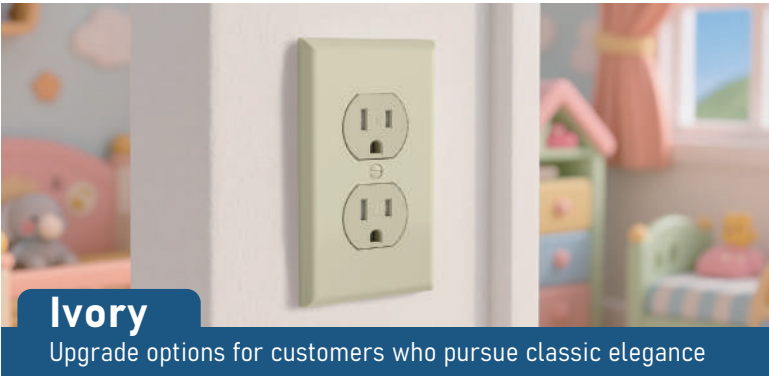


Installation

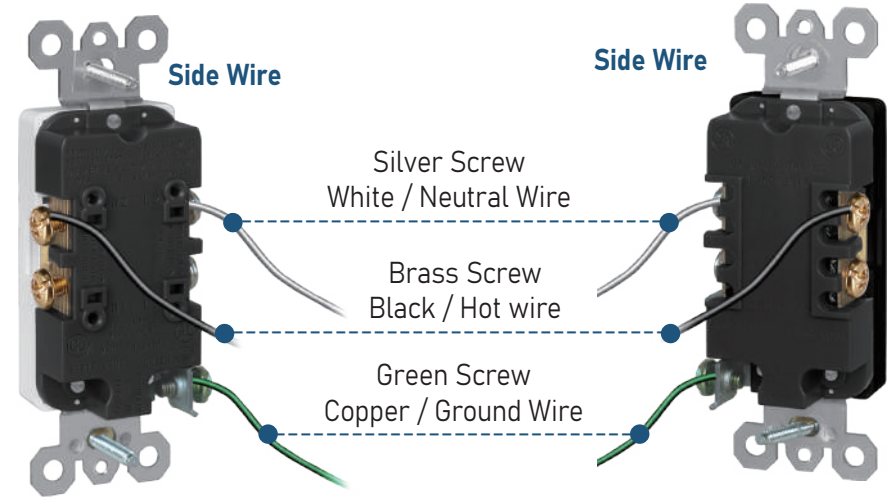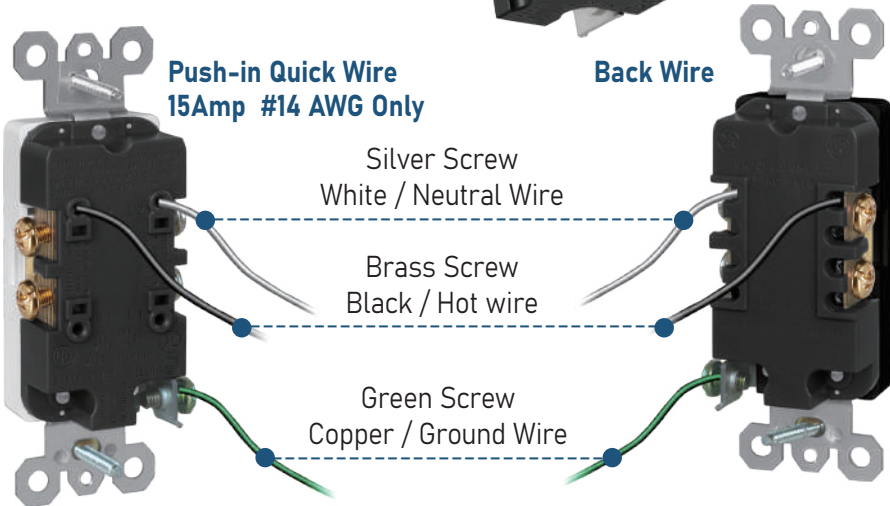

Product dimensions

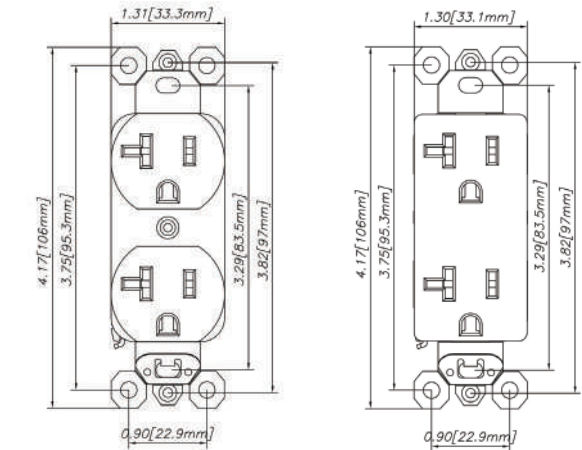

Duplex Decorative

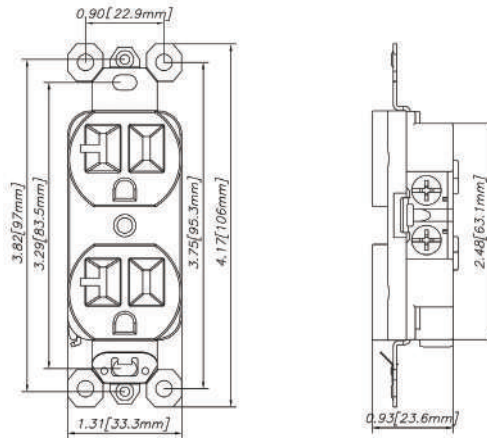


Concave Surface Side View

05

Smart Switch

Features a stunning, tempered glass faceplate for a seamless, modern look that is incredibly durable and easy to clean

"Alexa, Open the curtains in the living room"



"OK!"



Amazon Alexa



Smart Life App




Google Assistant



Tuya Smart App

US Glass Smart Switch

Glass Panel

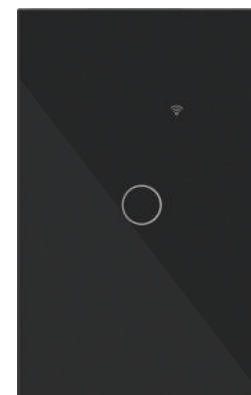

1 GANG SWITCH: 1200W/GANG

ITEM:USW8811

Mode:Touch/Wifi

Wiring Type:Neutral Required

Voltage:90-250V AC 50/60Hz

ITEM:USW8811-Z

Mode:Touch/Zigbee

Wiring Type:Single Life Wire

Voltage:110-240V AC 50/60Hz

ITEM:USW8811-S

Mode:Touch/Wifi

Wiring Type:Single Life Wire


Voltage:110-240V AC 50/60Hz

ITEM:UST8811

Mode:Touch

Wiring Type:Single Life Wire

Voltage:110-240V AC 50/60Hz

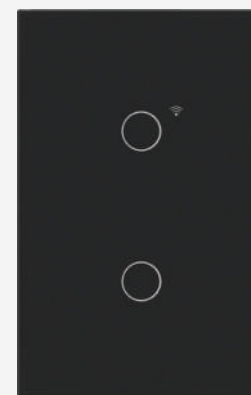

2 GANG SWITCH: 1200W/GANG

ITEM:USW8821

Mode:Touch/Wifi

Wiring Type:Neutral Required

Voltage:90-250V AC 50/60Hz

ITEM:USW8821-Z

Mode:Touch/Zigbee

Wiring Type:Single Life Wire

Voltage:110-240V AC 50/60Hz

ITEM:USW8821-S

Mode:Touch/Wifi

Wiring Type:Single Life Wire


Voltage:110-240V AC 50/60Hz

ITEM:UST8821

Mode:Touch

Wiring Type:Single Life Wire

Voltage:110-240V AC 50/60Hz

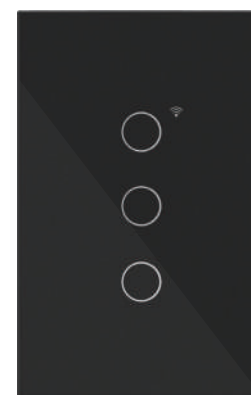

3 GANG SWITCH: 1200W/GANG

ITEM:USW8831

Mode:Touch/Wifi

Wiring Type:Neutral Required

Voltage:90-250V AC 50/60Hz

ITEM:USW8831-Z

Mode:Touch/Zigbee

Wiring Type:Single Life Wire

Voltage:110-240V AC 50/60Hz

ITEM:USW8831-S

Mode:Touch/Wifi

Wiring Type:Single Life Wire

Voltage:110-240V AC 50/60Hz

ITEM:UST8831


Mode:Touch

Wiring Type:Single Life Wire

Voltage:110-240V AC 50/60Hz

US Glass Smart Switch

Glass Panel

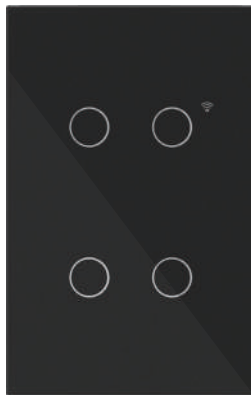

4 GANG SWITCH: 1200W/GANG

ITEM:USW8841

Mode:Touch/Wifi

Wiring Type:Neutral Required

Voltage:90-250V AC 50/60Hz

ITEM:USW8841-Z

Mode:Touch/Zigbee

Wiring Type:Single Life Wire

Voltage:110-240V AC 50/60Hz

ITEM:USW8841-S

Mode:Touch/Wifi

Wiring Type:Single Life Wire


Voltage:110-240V AC 50/60Hz

ITEM:UST8841

Mode:Touch

Wiring Type:Single Life Wire

Voltage:110-240V AC 50/60Hz

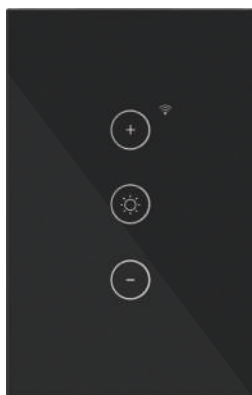

3 GANG Dimmer SWITCH:1200W/GANG

ITEM:USW8832

Mode:Touch/Wifi

Wiring Type:Neutral Required


Voltage:90-250V AC 50/60Hz

ITEM:UST8832

Mode:Touch

Wiring Type:Single Life Wire

Voltage:110-240V AC 50/60Hz

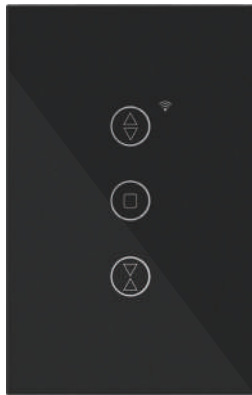

3 GANG Curtain SWITCH:1200W/GANG

ITEM:USW8831

Mode:Touch/Wifi

Wiring Type:Neutral Required


Voltage:90-250V AC 50/60Hz

ITEM:UST8831

Mode:Touch

Wiring Type:Single Life Wire


Voltage:110-240V AC 50/60Hz

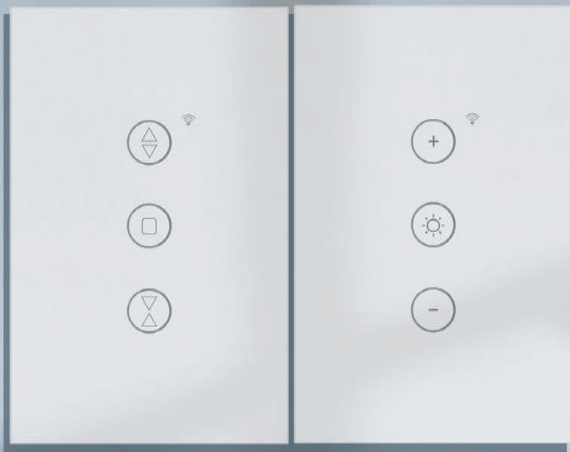

By using the app, you can conveniently control the WiFi switch from anywhere as long as you have an internet connection



Smart Life App Download

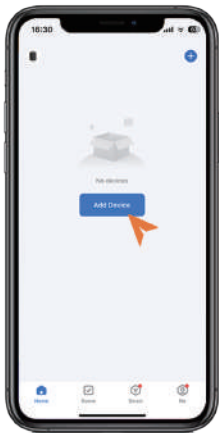


Step1

Click Add Device




Step2

Detect Device Auto
Click Add Connect

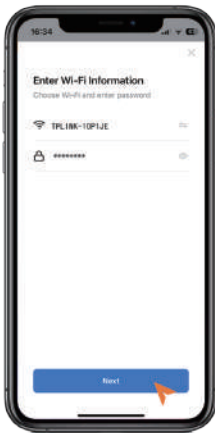


Step3

Fill Wifi Password
Next to Connect

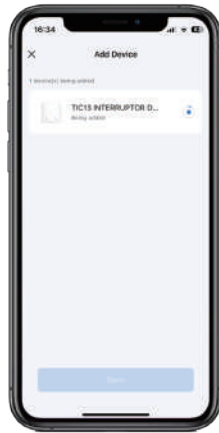

Step4

Connecting Device.....

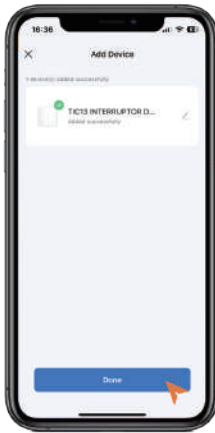

Step5

Switch Added
Rename If Necessary




Step6


Device Power On

Installation


Neutral and Fire Line Wiring Diagram (Neutral Wire Required)

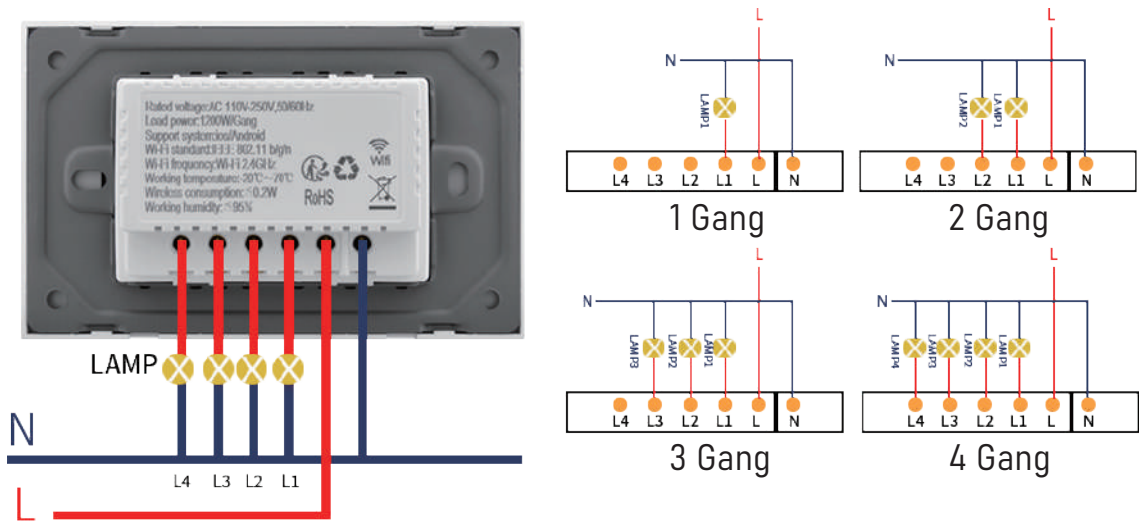

Single Fire Wiring Diagram (No Neutral Wire Required)

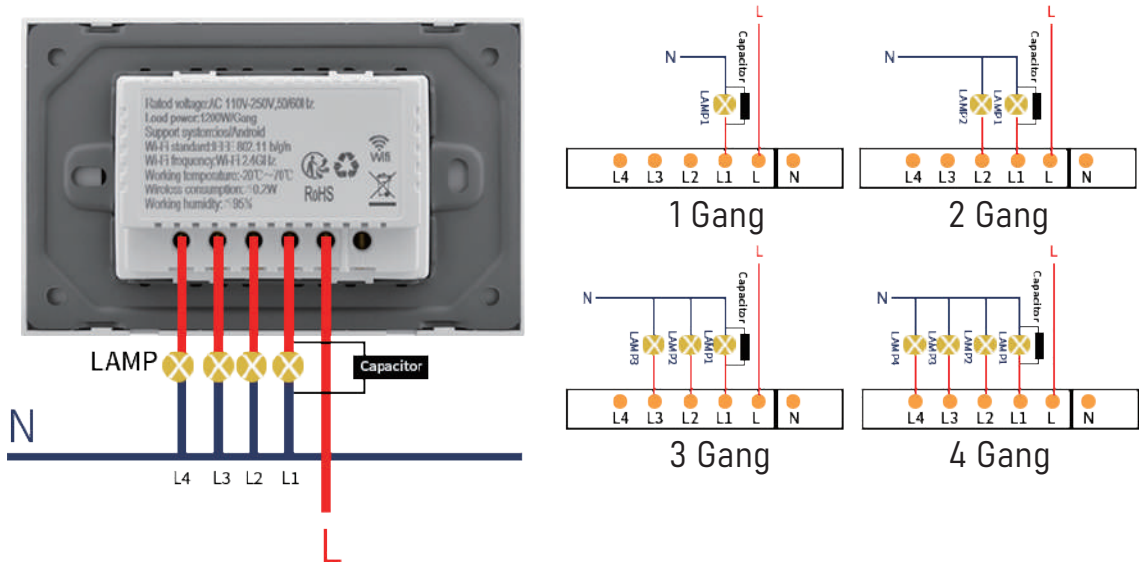


Product dimensions

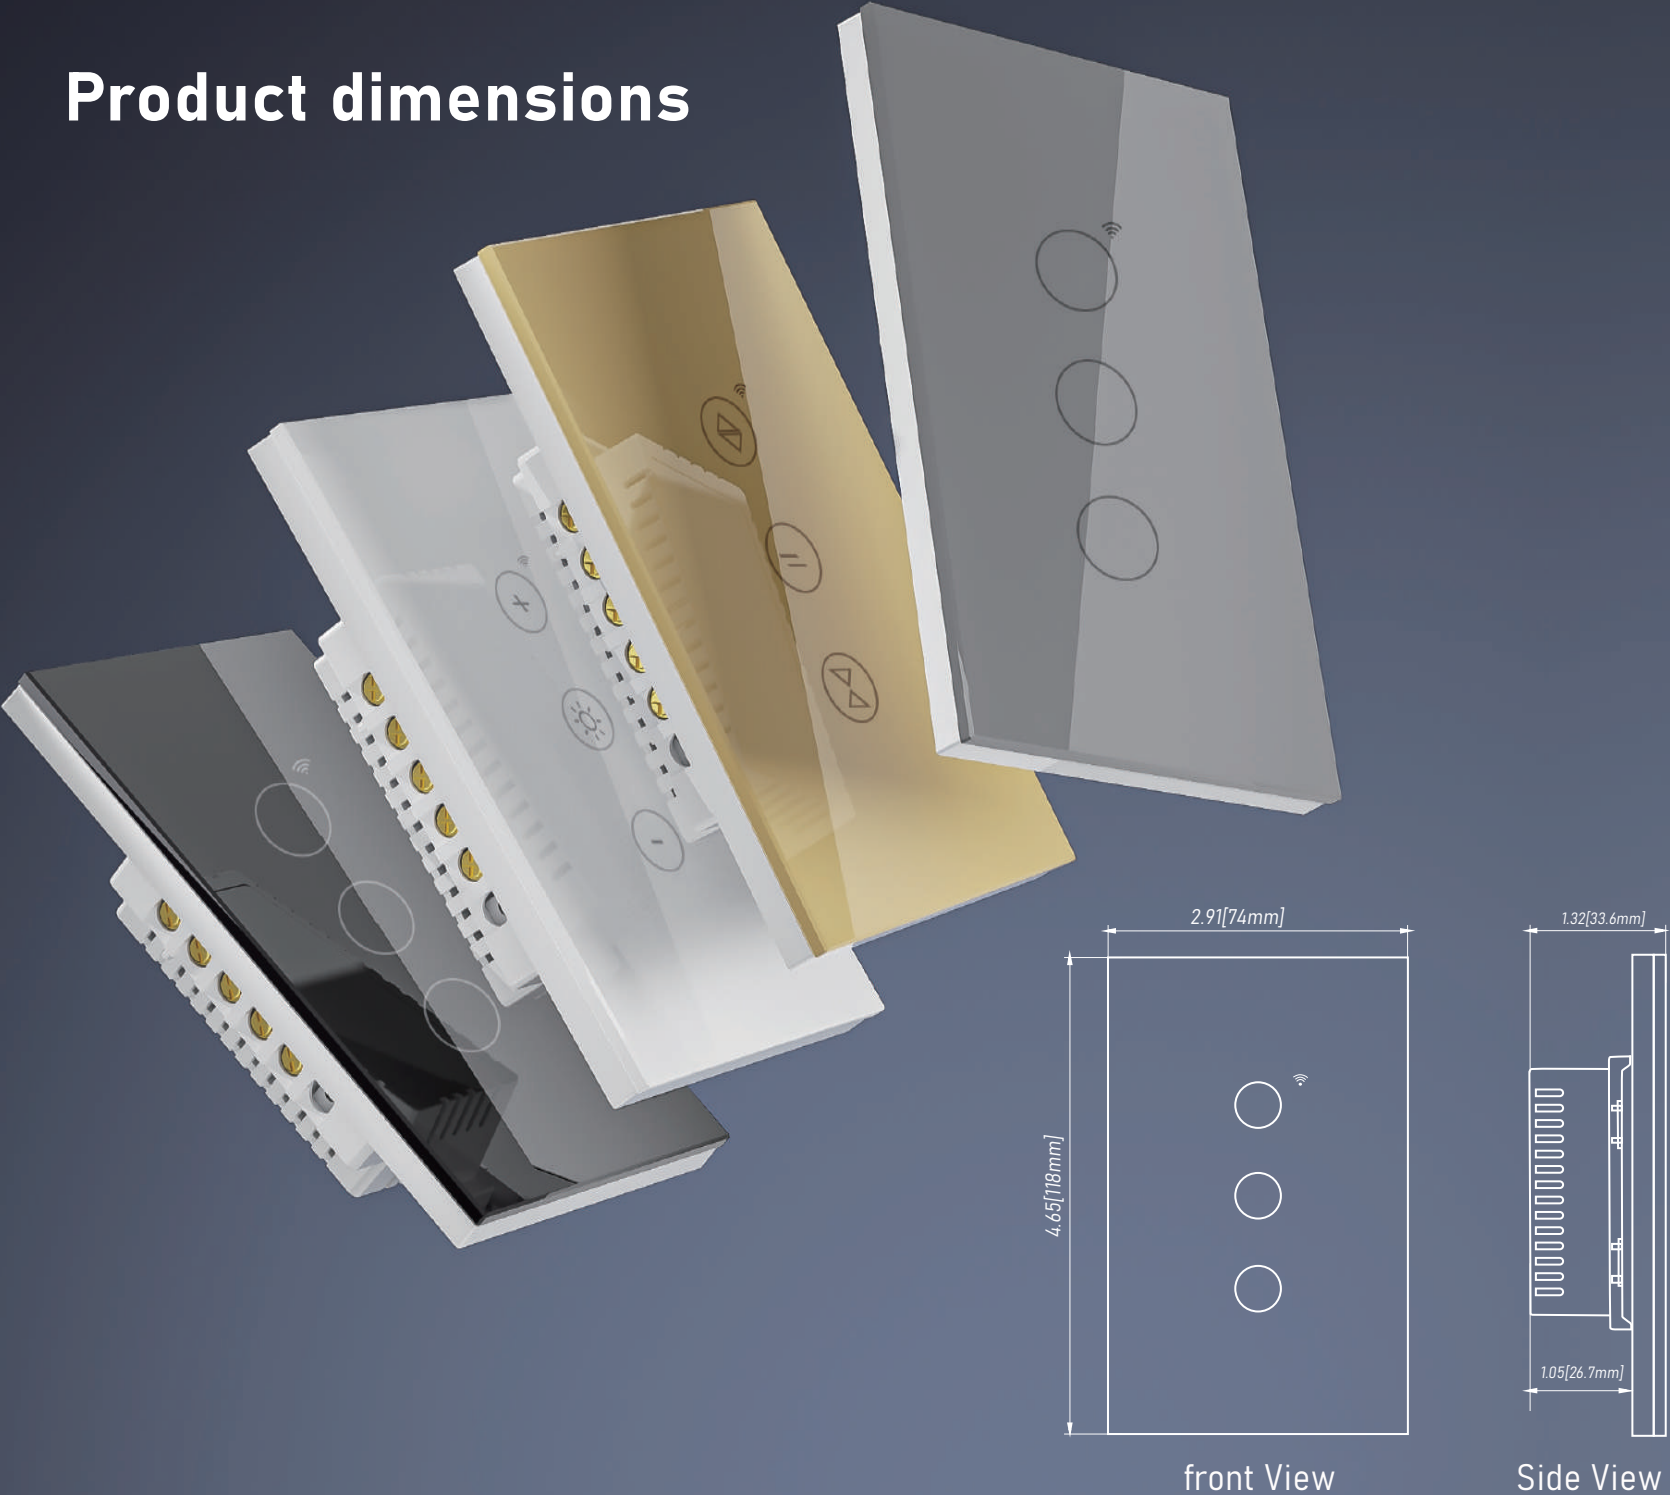

EU Glass Smart Switch

Glass Panel



ITEM:EUW8811

Mode:Touch/Wifi
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:1000W/Gang

ITEM:EUZ8811

Mode:Touch/Zigbee
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:1000W/Gang

ITEM:EUW8811C

Mode:Touch/Wifi
Wiring Type:(L/N+L)
Single Live Wire Workable
Voltage:160-240V AC 50/60Hz
Rated Power:600W/Gang

ITEM:EUZ8811C


Mode:Touch/Zigbee
Wiring Type:(L/N+L)
Single Live Wire Workable
Voltage:160-240V AC 50/60Hz
Rated Power:600W/Gang

ITEM:EUZ8811S

Mode:Touch/Zigbee
Wiring Type:(L)
Single Live Wire only
Voltage:110-240V AC 50/60Hz
Rated Power:600W/Gang

ITEM:EUT8811S

Mode:Touch
Wiring Type:(L) Single Live Wire only
Voltage:110-240V AC 50/60Hz
Rated Power:3~100W Max for LED
3~300W Max for Resistive Load



ITEM:EUW8821

Mode:Touch/Wifi
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:1000W/Gang

ITEM:EUZ8821

Mode:Touch/Zigbee
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:1000W/Gang

ITEM:EUW8821C

Mode:Touch/Wifi
Wiring Type:(L/N+L)
Single Live Wire Workable
Voltage:160-240V AC 50/60Hz
Rated Power:600W/Gang

ITEM:EUZ8821C


Mode:Touch/Zigbee
Wiring Type:(L/N+L)
Single Live Wire Workable
Voltage:160-240V AC 50/60Hz
Rated Power:600W/Gang

ITEM:EUZ8821S

Mode:Touch/Zigbee
Wiring Type:(L)
Single Live Wire only
Voltage:110-240V AC 50/60Hz
Rated Power:600W/Gang

ITEM:EUT8821S

Mode:Touch
Wiring Type:(L) Single Live Wire only
Voltage:110-240V AC 50/60Hz
Rated Power:3~100W Max for LED
3~300W Max for Resistive Load



ITEM:EUW8831

Mode:Touch/Wifi
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:1000W/Gang

ITEM:EUZ8831

Mode:Touch/Zigbee
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:1000W/Gang

ITEM:EUW8831C

Mode:Touch/Wifi
Wiring Type:(L/N+L)
Single Live Wire Workable
Voltage:160-240V AC 50/60Hz
Rated Power:600W/Gang

ITEM:EUZ8831C


Mode:Touch/Zigbee
Wiring Type:(L/N+L)
Single Live Wire Workable
Voltage:160-240V AC 50/60Hz
Rated Power:600W/Gang

ITEM:EUZ8831S

Mode:Touch/Zigbee
Wiring Type:(L)
Single Live Wire only
Voltage:110-240V AC 50/60Hz
Rated Power:600W/Gang

ITEM:EUT8831S

Mode:Touch
Wiring Type:(L) Single Live Wire only
Voltage:110-240V AC 50/60Hz
Rated Power:3~100W Max for LED
3~300W Max for Resistive Load



ITEM:EUW8841

Mode:Touch/Wifi
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:1000W/Gang

ITEM:EUZ8841

Mode:Touch/Zigbee
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:1000W/Gang

ITEM:EUW8841C

Mode:Touch/Wifi
Wiring Type:(L/N+L)
Single Live Wire Workable
Voltage:160-240V AC 50/60Hz
Rated Power:600W/Gang

ITEM:EUZ8841C

Mode:Touch/Zigbee
Wiring Type:(L/N+L)
Single Live Wire Workable
Voltage:160-240V AC 50/60Hz
Rated Power:600W/Gang

ITEM:EUT8841S

Mode:Touch
Wiring Type:(L) Single Live Wire only
Voltage:110-240V AC 50/60Hz
Rated Power:3~100W Max for LED
3~300W Max for Resistive Load

EU Glass Smart Switch

Glass Panel




ITEM:EUW8832

Mode:Touch/Wifi
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:300W/Gang

ITEM:EUZ8832

Mode:Touch/Zigbee
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:300W/Gang



ITEM:EUW8833

Mode:Touch/Wifi
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:300W/Gang

ITEM:EUZ8833

Mode:Touch/Zigbee
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:300W/Gang



ITEM:EUW8834

Mode:Touch/Wifi
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:300W/Gang

ITEM:EUZ8834

Mode:Touch/Zigbee
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:300W/Gang



ITEM:EUW8835


Mode:Touch/Wifi
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:300W/Gang

ITEM:EUZ8835

Mode:Touch/Zigbee
Wiring Type:(N+L)
Neutral Wire Required
Voltage:90-250V AC 50/60Hz
Rated Power:300W/Gang



1 Gang/2 Gang/3 Gang/4 Gang

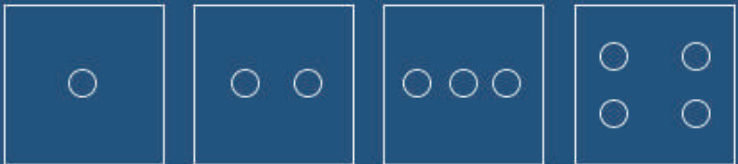

Dimmer



Curtain



Fan




Heater




Installation


Neutral and Fire Line
Wiring Diagram
(Neutral Wire Required)

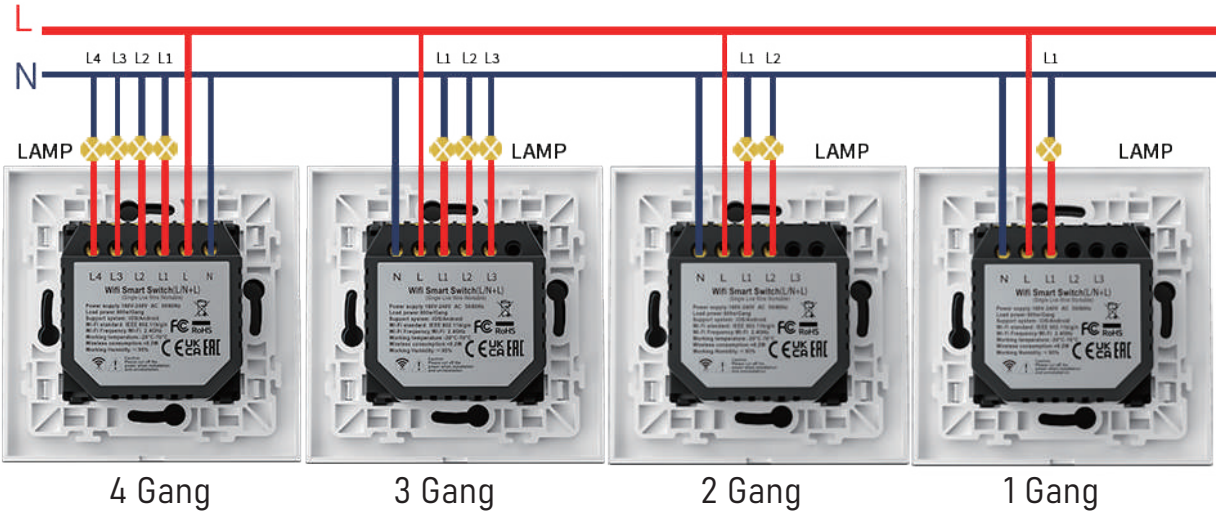

Single Fire
Wiring Diagram
(No Neutral Wire Required)

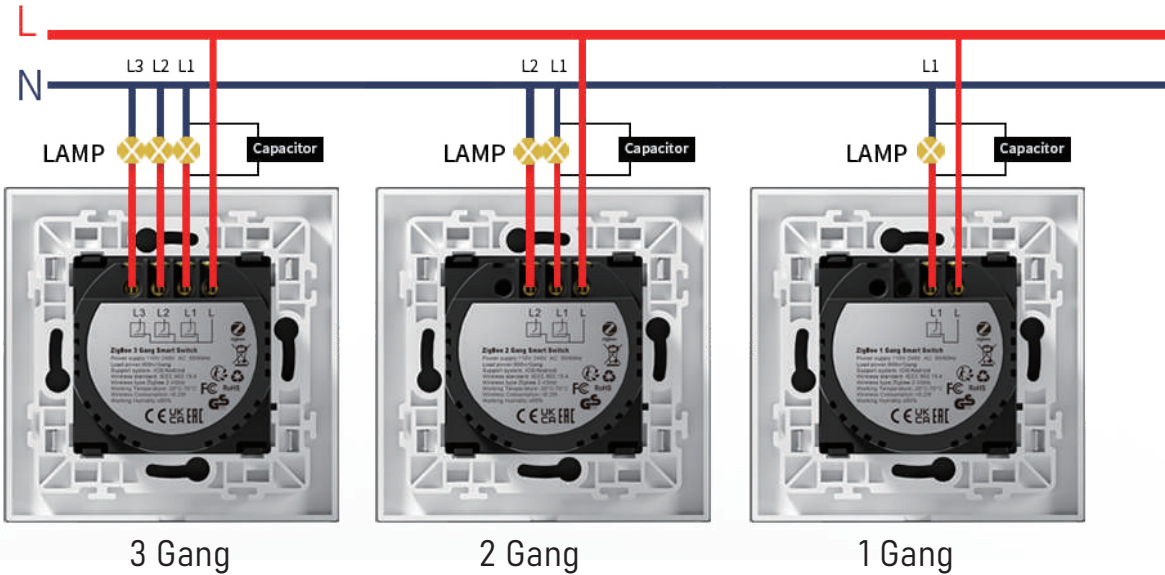

Product dimensions

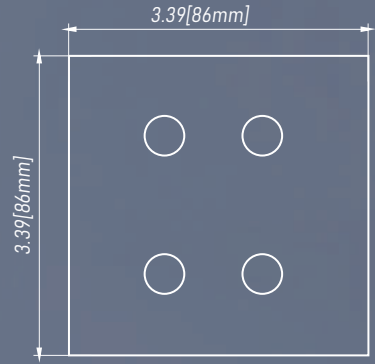

front View



Side View



Lighting Switches

A comprehensive collection of switches designed for reliable performance and to complement any home's decor, from classic to contemporary



ITEM:DS15

Paddle Rocker Decorator Switch
Single Pole
Rating:15A,120/277V
Surface:Glossy/Matte

ITEM:DS15.3

Paddle Rocker Decorator Switch
3-Ways
Rating:15A,120/277V
Surface:Glossy/Matte



ITEM:DS1502

Double Paddle Rocker
Decorator Switch
Break-off Tab
Rating:15A,120/277V
Surface:Glossy



ITEM:DS1503

Three Single Pole Paddle
Rocker Decorator Switch
Single Pole
Rating:15A,120/277V
Surface:Glossy



ITEM:T15

Toggle Light Switch
Single Pole
Rating:15A,125V
Surface:Matte



ITEM:T15.3

Toggle Light Switch
3-Ways
Rating:15A,125V
Surface:Matte

○ White ● Ivory ● Almond ● Black ● Grey ● Brown ● Graphite

Multiple Styles

Choose from toggle, rocker, and paddle designs to match your aesthetic




Designed for Integration

A wide range of colors and finishes (White, Ivory, Light Almond, etc.) to coordinate perfectly with our wallplates and your room's style




Durability Built-In

Constructed with robust materials and high-quality contacts for a long mechanical life

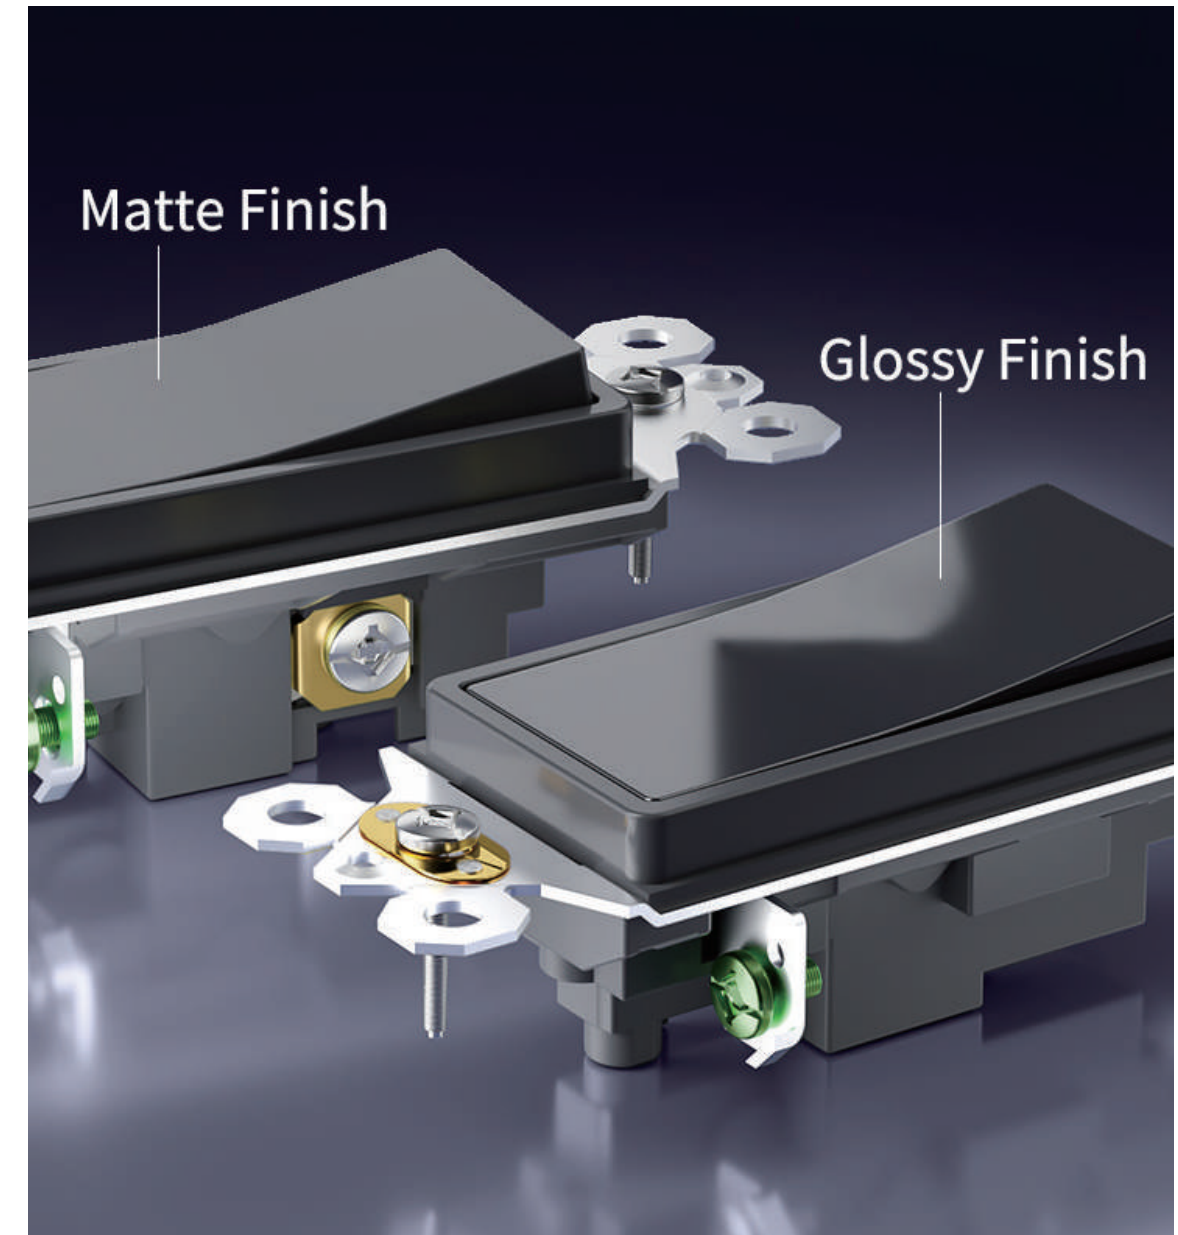

Installation

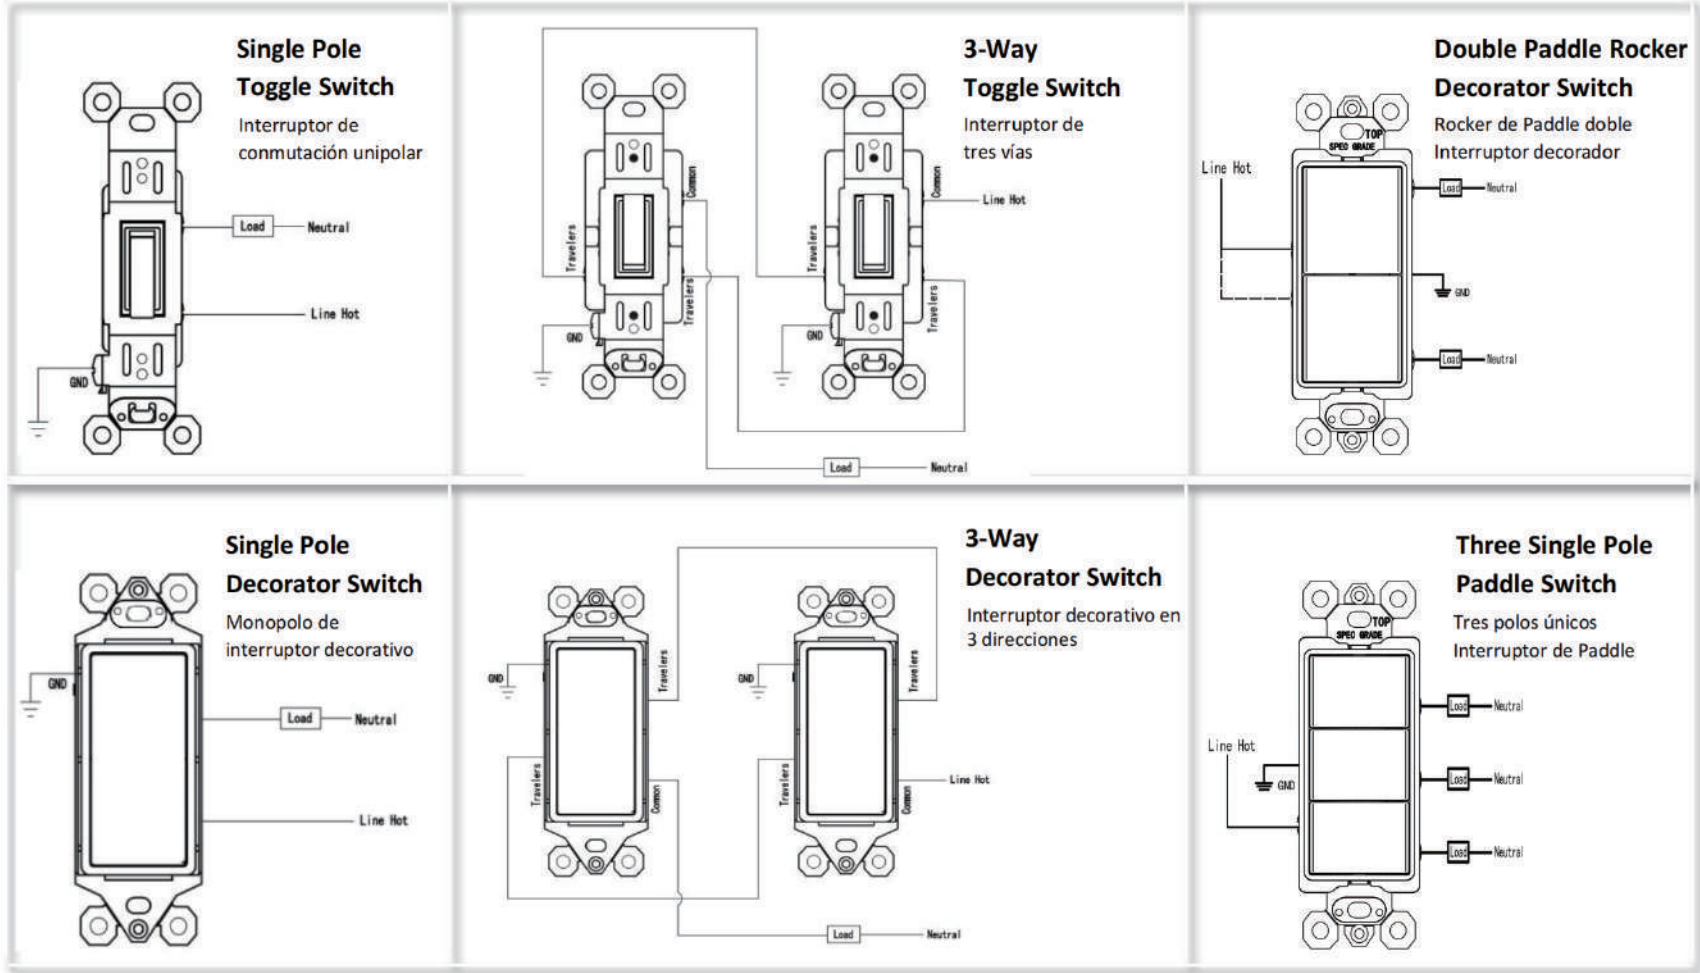


If using terminal screws: Terminal screws accept up to #12 AWG wire. Wrap each stripped wire 3/4 turn clockwise under heads of screws without overlapping and tighten securely.


If using push-wire holes: Fully insert #14 AWG solid copper wire ONLY into the push-wire holes. Do not use push-wire holes for circuits greater than 15 amps. If switch must be removed, insert screwdriver blade in the release slot and push it toward the front of the switch, releasing wire. Discard the switch.

If using back-wire method: Back-wire accepts up to a #12 AWG wire. Insert stripped wire between external pressure plate clamp and terminal. Tighten securely. 3. Mount switch in box using mounting screws supplied. Attach wall plate. Restore power only when finished wiring the entire circuit.


Product dimensions

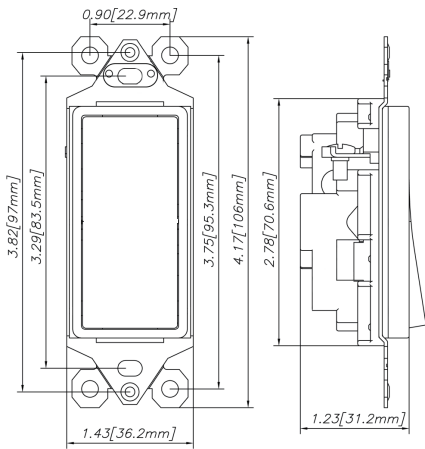


DS15 Side View

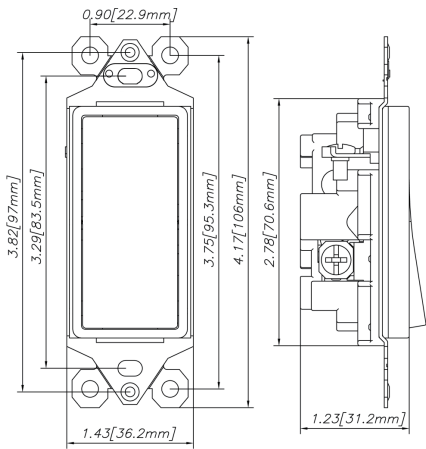


DS15.3 Side View

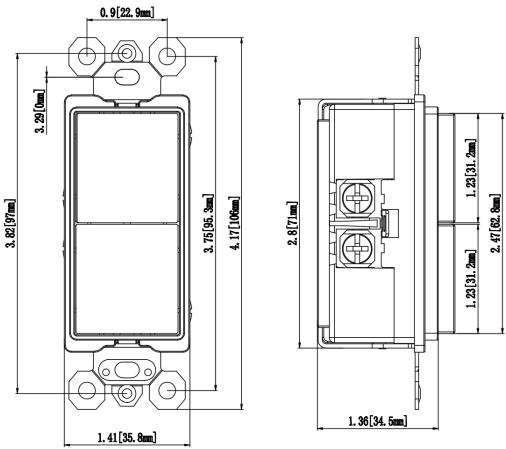


DS1502 Side View

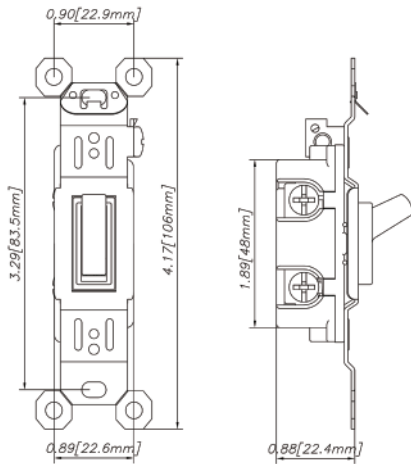

T15 Side View

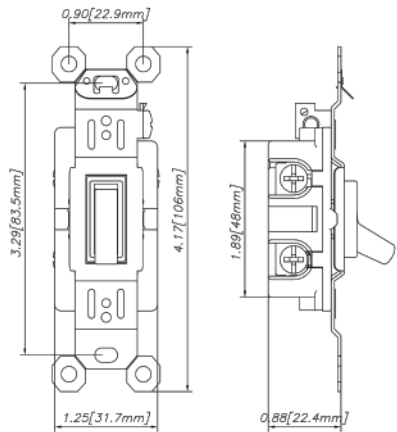

T15.3 Side View

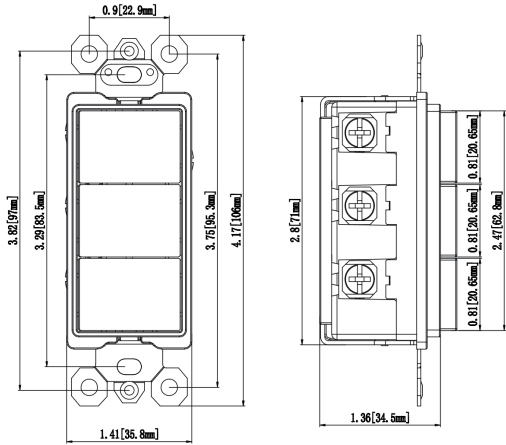

DS1503 Side View

07

Wallplates

Providing a safe, polished, and professional finish in homes, offices, hotels, and commercial spaces, tying your entire electrical system together beautifully




ITEM:BS1801
1 Gang Decorator
Standard Plate
Surface:Glossy/Matte


ITEM:BS1802
1 Gang Decorator
Medium Plate
Surface:Glossy




ITEM:BS1803
1 Gang Decorator
Screwless Plate
Surface:Glossy/Matte

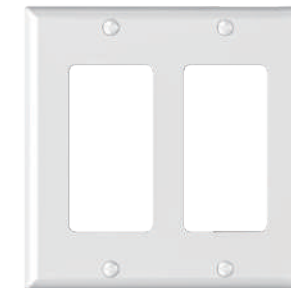

ITEM:BS18012
2 Gang Decorator
Standard Plate
Surface:Glossy/Matte

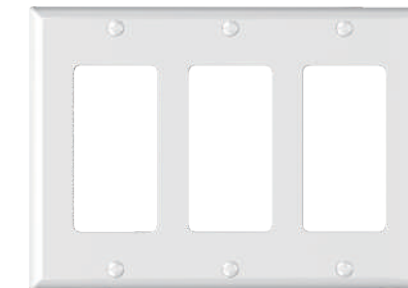

ITEM:BS18013
3 Gang Decorator
Standard Plate
Surface:Glossy/Matte

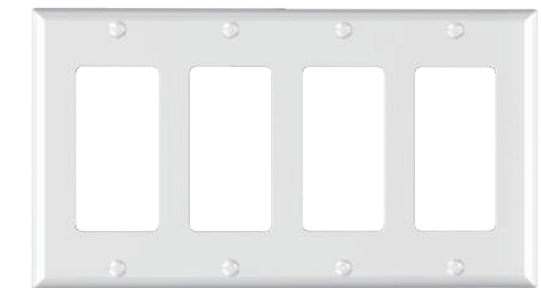

ITEM:BS18014
4 Gang Decorator
Standard Plate
Surface:Glossy/Matte




ITEM:BS18032
2 Gang Decorator
Screwless Plate
Surface:Glossy/Matte



ITEM:BS18033
3 Gang Decorator
Screwless Plate
Surface:Glossy/Matte




ITEM:BS18034
4 Gang Decorator
Screwless Plate
Surface:Glossy/Matte

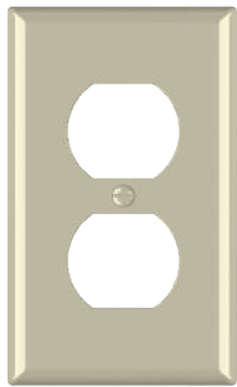


ITEM:BS1804
1 Gang Duplex Plate
Surface:Glossy



ITEM:BS1805
1 Gang Extension Plate
Surface:Glossy

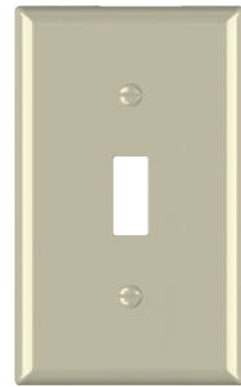

ITEM:BS1806
1 Gang Toggle Plate
Surface:Glossy

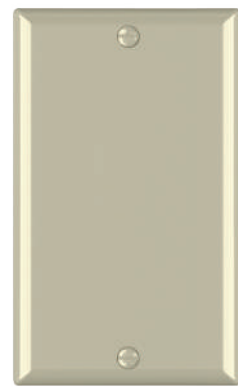


ITEM:BS1807
1 Gang Blank Plate
Surface:Glossy



Screwless Design

Features a magnetic or snap-on attachment for a clean, minimalist look without visible screws

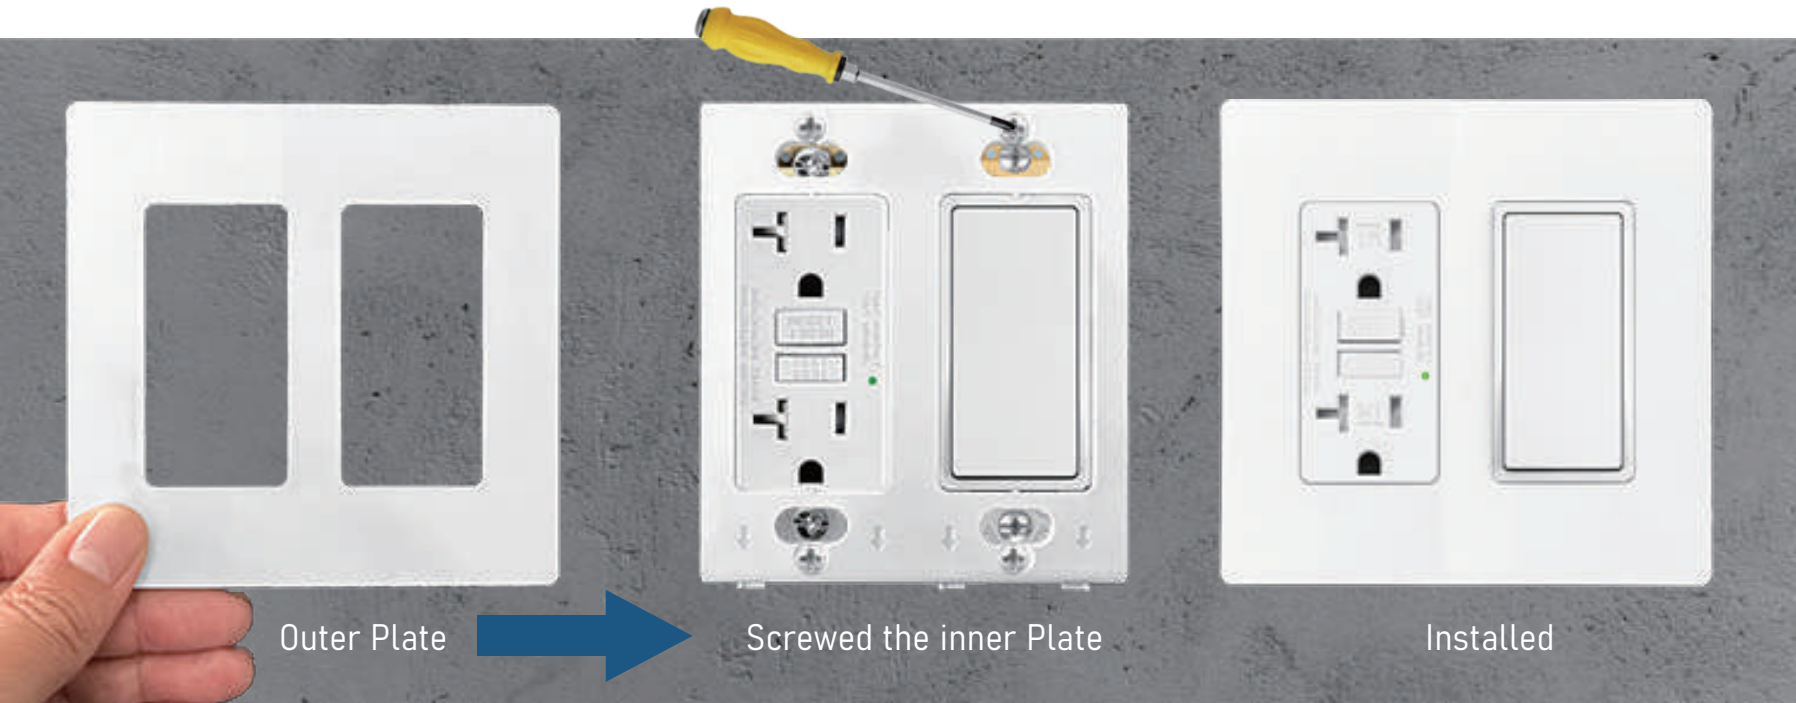

Product dimensions

- White
- Ivory
- Almond
- Black
- Grey
- Brown
- Graphite

