


Unit Endplay Shims

36428-Z

10 Shims (6 slots - .010" thick)

36428A-Z

10 Shims (4 slots - .010" thick)

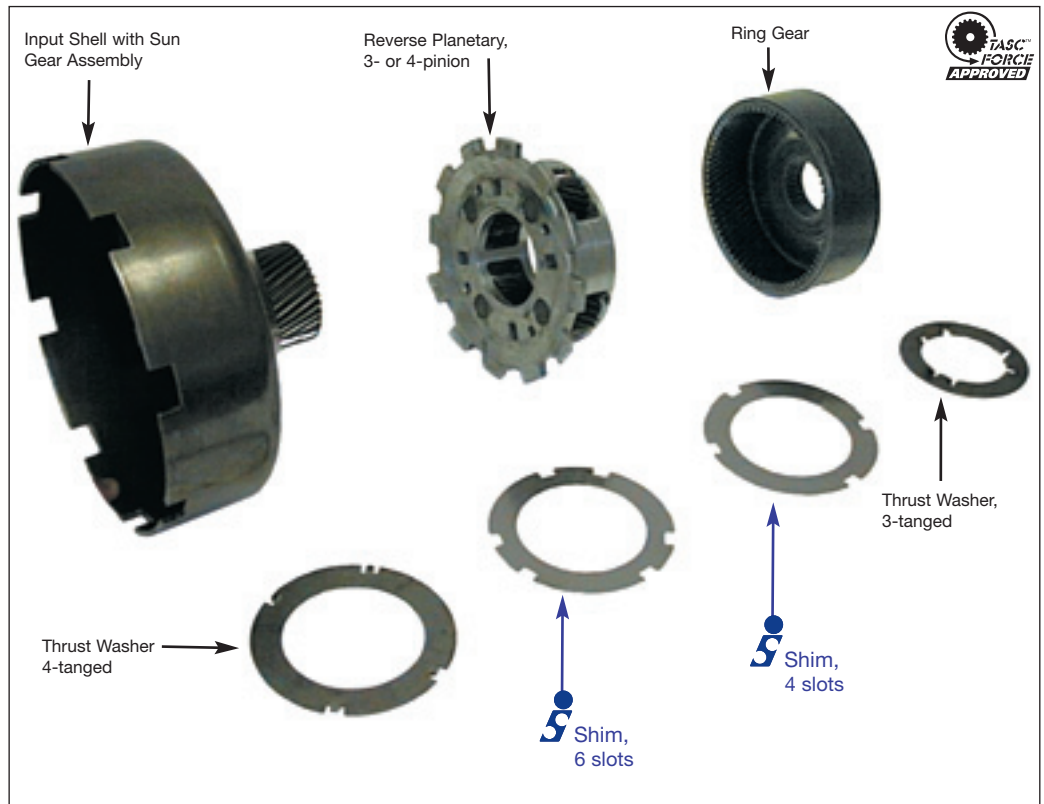

Installation Instructions:

1. When visible spline or driveline wear is evident, and/or pump stator resurfaced, it is beneficial to install a shim(s) during lower unit assembly.
2. When final assembly is completed, total endplay should be inspected with an H gauge, depth mic, or dial caliper. The OEM endplay specification is .040" maximum.

The **36428-Z** shim is to be used between the 6-tanged thrust washer and 3-pinion rear planetary assembly. The **36428A-Z** shim is to be used between the 4-tanged thrust washer and 4-pinion rear planetary assembly.

Note: 36428-Z can also be used to stabilize the front planet to input hub. By reducing this tolerance, planet wear is reduced.