

Servo Pistons

22912 A727/46RH/RE


22912A A904/A999/42RH/RE

22912B 47RH/RE, '94-'96

22912C 47-48RE, '97-Up

Each includes the following:

1 Rear Servo Piston

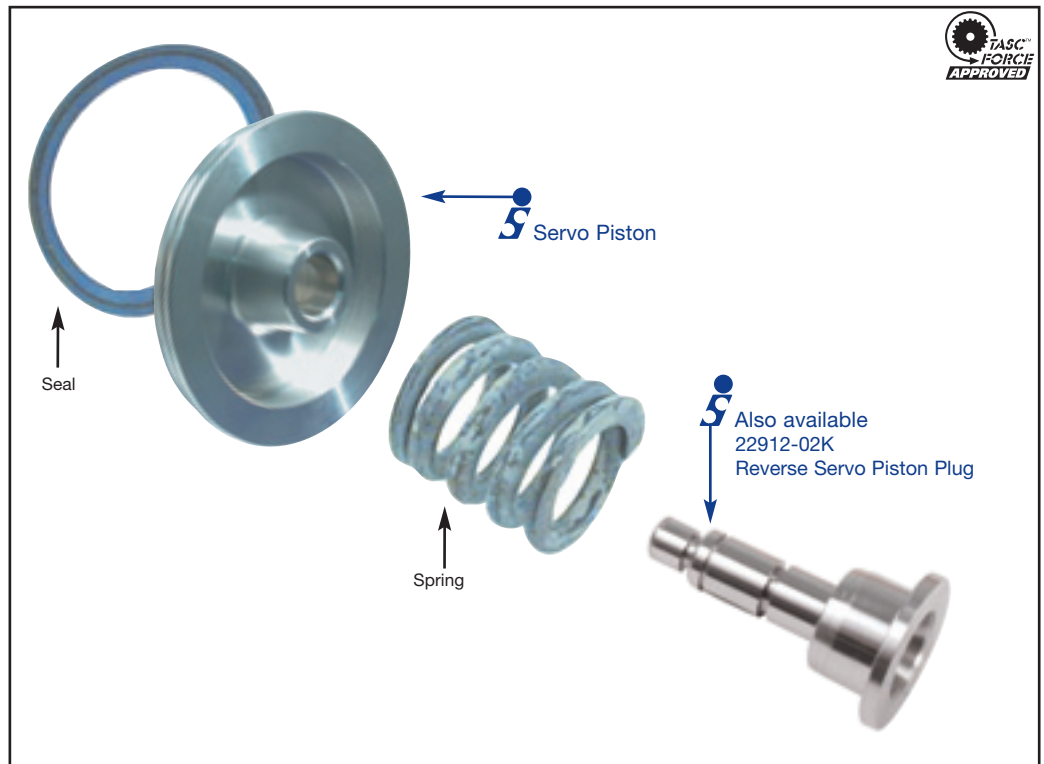

Installation Instructions

Remove the worn or broken reverse servo piston. Replace with the appropriate Sonnax piston, making sure that all parts are oriented and aligned properly. If the piston plug is worn, it will have to be replaced. The reverse band may have to be adjusted after replacement.



OEM version of 22912B
47RH/RE, '94-'96



OEM version of 22912C
47-48RE, '97-Up

Sonnax P/N	OEM P/N	Diameter	Application
22912	2801281	2.800"	A727, 46RH/RE
22912A	2801271	2.545"	A904, A999, 42RH/RE
22912B	N/A	2.46"	47RH/RE, '94-'96
22912C	52118745	2.46"	47-48RE, '97-Up