


3-4 Clutch Boost Spring

77763-01

10 Boost Springs

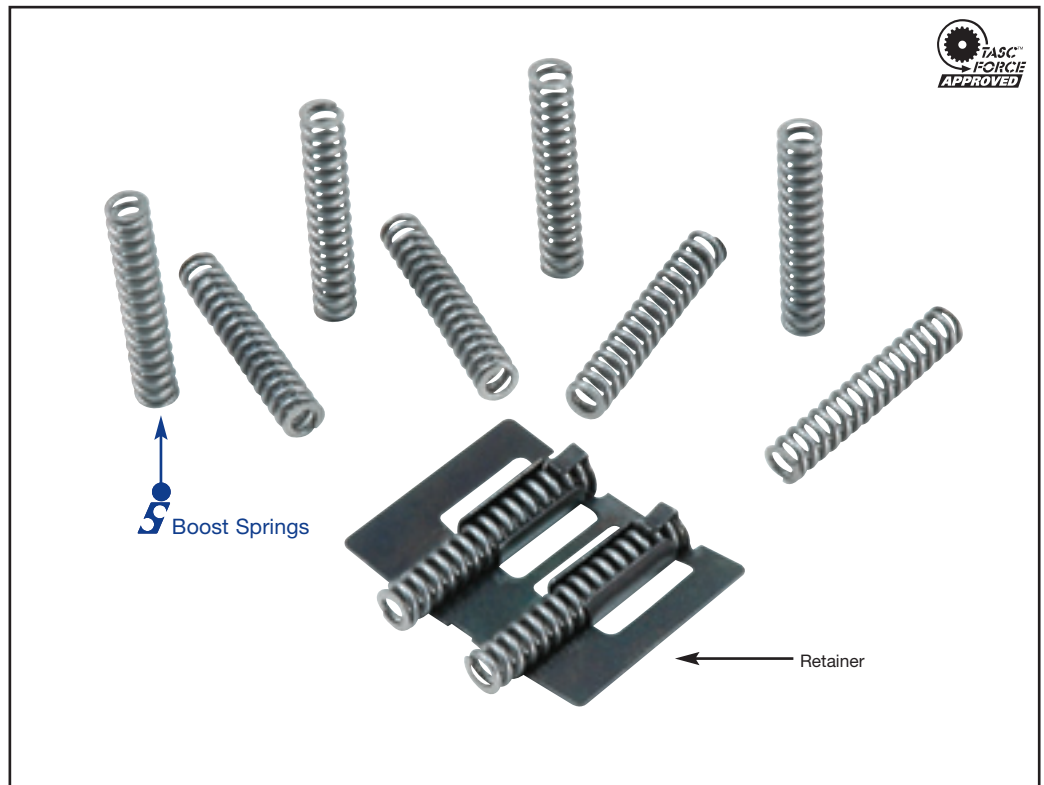

Installation/Assembly Steps:

1. Carefully pull the old boost springs from the five sheet-metal spring retainers found in the 3-4 clutch housing. Pull the springs straight out to avoid damaging the retainer. Discard the old springs and keep the retainers.
2. Install the new **77763-01** boost springs into the retainers.
3. Reinstall the retainers, with new springs, into the 3-4 clutch.
4. Set clutch plate clearance per factory specification and complete transmission assembly.