# 4L30-E, AR25, AR35

PART NUMBERS 54200-01K, -06K, -12K, -14K

## **OEM Ratio Boost Valve & Sleeve Kits**

#### **54200-12K** Small boost ratio .564" valve- small spool diameter (066 OEM Mark)

**NEW** Product

**54200-14K** Sm./Med. boost ratio .570" valve- small spool diameter

(067 OEM Mark)

**54200-01K** Medium boost ratio .630" valve- small spool diameter (448 OEM Mark)


**54200-06K** Large boost ratio

.649" valve- small spool diameter (264 OEM Mark)

Each kit includes the following

1 Valve

1 Sleeve

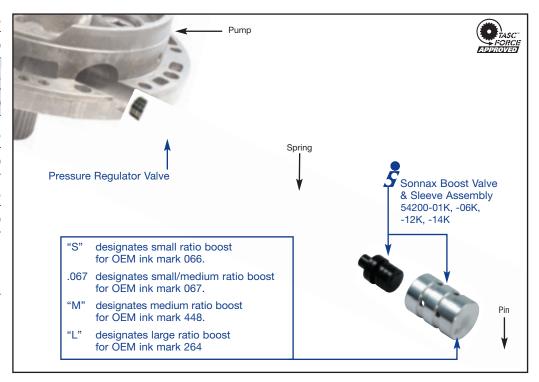

### There are four boost ratios available to cover the most common OEM applications:

**54200-12K** has a **Small** boost ratio (The end of the sleeve has been marked with an "**S**" to designate a small ratio boost valve and sleeve, and is equivalent to the OEM/Euro mark of 066).

Large spool diameter = .605" (15.25mm) Small spool diameter = .564" (14.30mm)

**54200-14K** has a **Small-to-Medium** boost ratio (The end of the sleeve has been marked with an **"067"** to match the equivalent OEM/Euro mark of 067).

Large spool diameter = .634" (16.09mm) Small spool diameter = .570" (14.49mm)

**54200-01K** has a **Medium** boost ratio (The end of the sleeve has been marked with an "M" to designate a medium ratio boost valve and sleeve, and is equivalent to the OEM/Euro mark of 448).

Large spool diameter = .662" (16.80mm) Small spool diameter = .630" (16.00mm)

**54200-06K** has a **Large** boost ratio (The end of the sleeve has been marked with an "**L**" to designate a large ratio boost valve and sleeve and is equivalent to the OEM/Euro mark of 264).

Large spool diameter = .697" (17.70mm) Small spool diameter = .649" (16.50mm)

#### **Instructions:**

- 1. Remove and discard the OEM boost valve and sleeve.
- 2. Reassemble using the new Sonnax valve and sleeve.

