

COMPLAINT

SECONDARY COMPLAINTS

Chain slippage & pulley fracture

- RPM surge or chatter on acceleration

CAUSE

The secondary pressure regulator valve controls the secondary pulley ratio. The primary and secondary pulleys must equally expand and contract to provide push belt load and ratio control. Excess pressure can break the pulley welds and low pressure causes the belt to slip.

CORRECTION

Refurbish the bore using tool kit and install Sonnax valve and end plug.

Oversized Secondary Pressure Regulator Valve Kit

113741-13K

- 1 O/S Secondary Pressure Regulator Valve
- 1 End Plug



NOTE: Fits JF011E only


F-113741-TL13

- 2 Reamers
- 1 Reamer Jig
- 1 Guide Pin



Tool Kit for 113741-13K, can also be used for 113741-15K

NOTE: Sonnax "F" tool kits designed to service a specific bore require the VB-FIX, a self-aligning valve body reaming fixture. More information and instructions are available at www.sonnax.com.

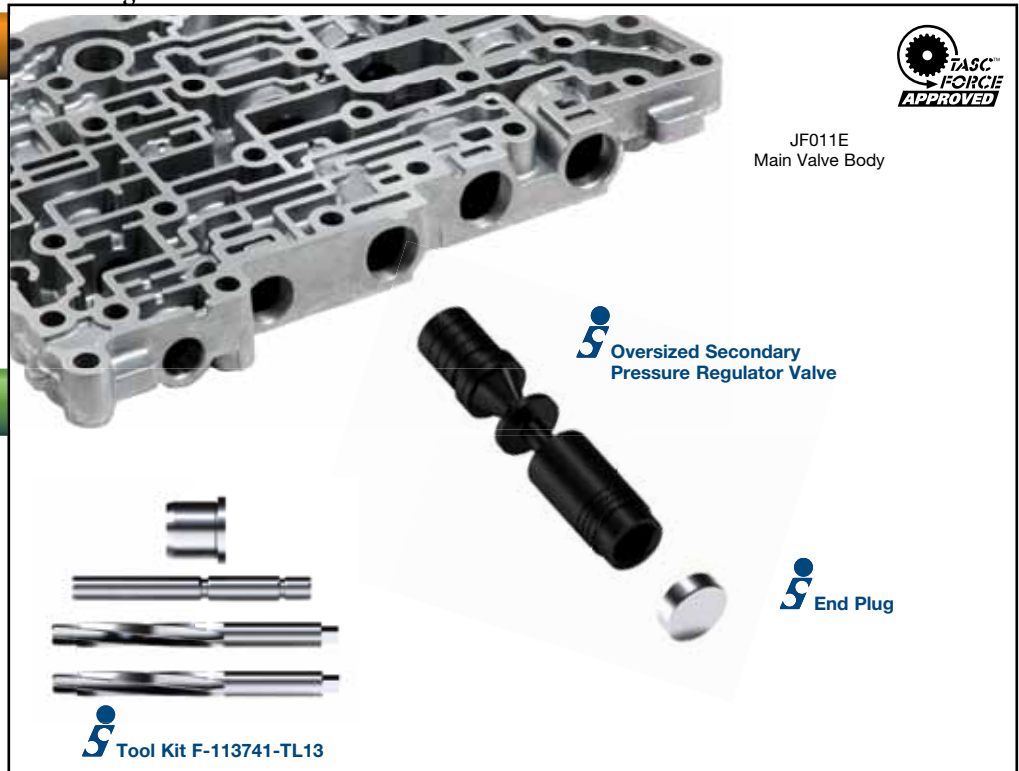

Features & Benefits

- Sonnax valve is hard-coat anodized aluminum to provide wear resistance.
- Outboard spool lengthened for additional valve support
- **You need this if...**
- Vacuum testing at the port indicated fails to hold 18" of vacuum or higher.

