

Center Support Gasket

36743G

'89-up

5 Gaskets

Note: US Patents 6,325,388, 6,588,766
& 7,097,178

Also Available:

36743H

Early Model


36743H-01

Late Model ('95-up)

Each includes the following
Center Support Hub/Bearing Type

96423-01 (works with 36743H-01)

1 Center Support Bearing

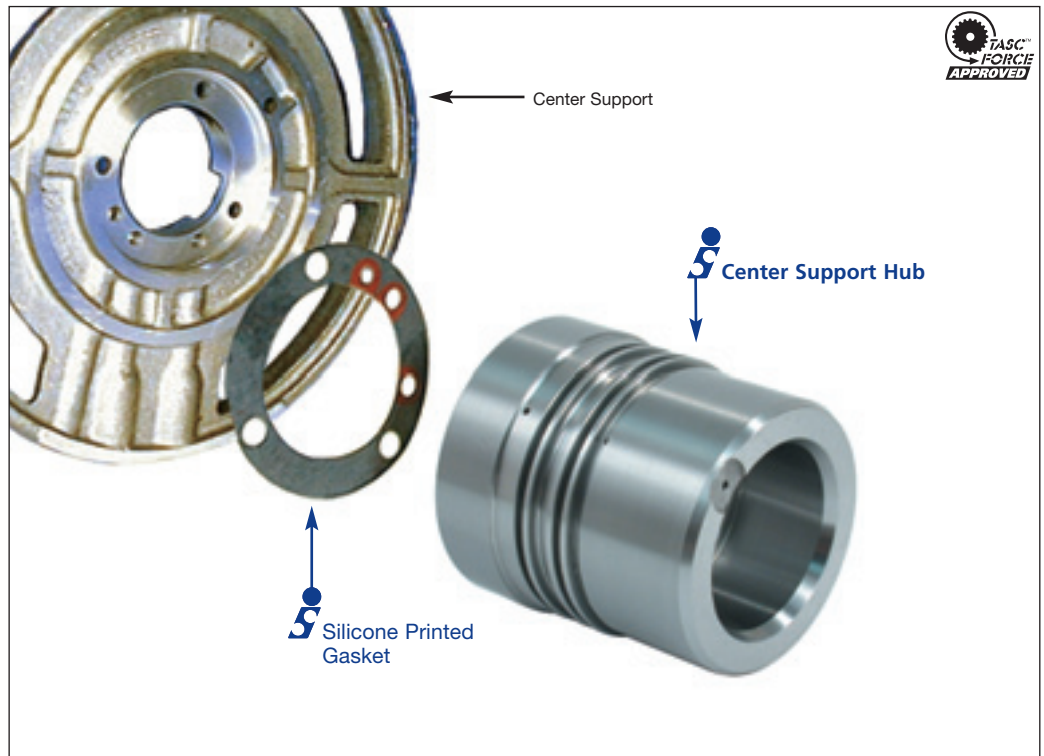

Instructions

1. Remove any burrs and break sharp edges on the aluminum center support contact surface.
2. Using a medium grit oil stone, smooth the mating hub surface.
3. Clean both parts, including the tapped holes, with solvent.
4. Lightly coat gasket surface with TransJel™ and place it in the center support counterbore with beaded gasket surface against center support.
5. Align gasket holes with center support and set hub in place.
6. Apply Loctite® 242 thread locker on the (3) M6 mounting screws, following the Loctite® instructions.
7. Install screws and progressively torque to 75-85 in-lbs initially, then torque to 100-120 in-lbs.