

# **TORQUE CONVERTER PARTS**

FD-0-18V

**OVERSIZED O-RING** 

# **Applications:**

• E4OD, AODE and 4R70W

#### **Details:**

- Made from fluorocarbon
- 54.75mm (2.156") I.D.
- 3.40mm (.134") cross section
- Resize piston/damper bore diameter to 61.37mm ±0.025mm (2.416"±.001")


#### **Associated Parts:**

- FD-0-4V, standard o-ring
- FD-HT-E40DHS, turbine hub, OEM standard
- FD-HT-13HSK, turbine hub with bearing
- FD-HT-14HSK, turbine hub with plastic washer
- FD-HT-AODE, turbine hub

#### Part No.

## FD-0-18V

Oversized O-Ring

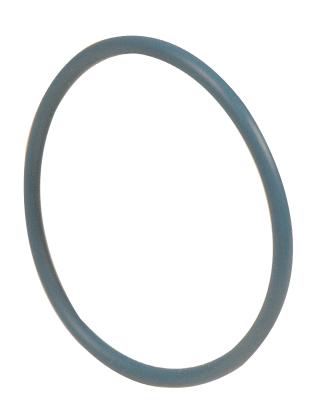

# Sold in prepackaged quantities of 25 units

Please refer to our

#### **TORQUE CONVERTER PARTS CATALOG VOLUME 6**

## FD-0-18V is:

Item Number 16 of Reference Figure 2.03 on page 64 and Item Number 15 of Reference Figure 2.15 on page 94.



**FD-O-18V** is an oversized version of the Sonnax **FD-O-4V**. It can be used in Ford E4OD, AODE and 4R70W torque converters with worn piston bores. Be sure to resize the bore to 61.37mm±0.025mm (2.416" ±.001"). To avoid the risk of the o-ring coming out of groove, do not exceed this recommended bore specification.

©2007 Sonnax Industries, Inc. FD-0-18V 04-16-07