

## Replacement Accumulator Seal Kit

### Part No.


**22841-04SK**

2 D-Rings

2 Teflon<sup>®</sup> Solid Seals

2 Teflon<sup>®</sup> Scarf Cut Seals

## CHRYSLER 727, 904, 42-46-47-48RH/RE

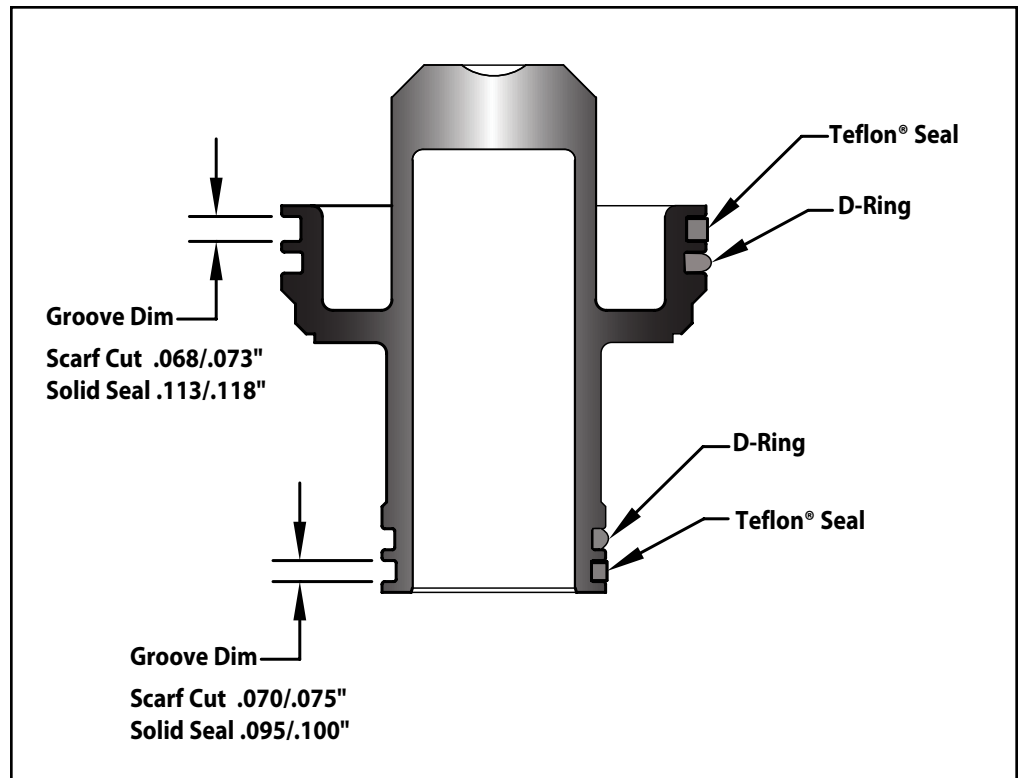

### Instructions

1. Determine which replacement Teflon<sup>®</sup> seals to use.
  - If your accumulator piston has solid Teflon<sup>®</sup> seals, use the solid replacement seals.
  - If your accumulator piston has scarf cut Teflon<sup>®</sup> seals, use the scarf cut replacement seals.
  - If it is unclear which seals came with your accumulator piston, please use the groove dimensions above to determine which to use.
2. Install Teflon<sup>®</sup> and D-Rings per above illustration.

### Reassembly

1. Lubricate seals.
2. Install.



Visit Sonnax High Performance  
Transmission the web at:  
[www.sonnax.com/hp\\_transmission.php](http://www.sonnax.com/hp_transmission.php)