



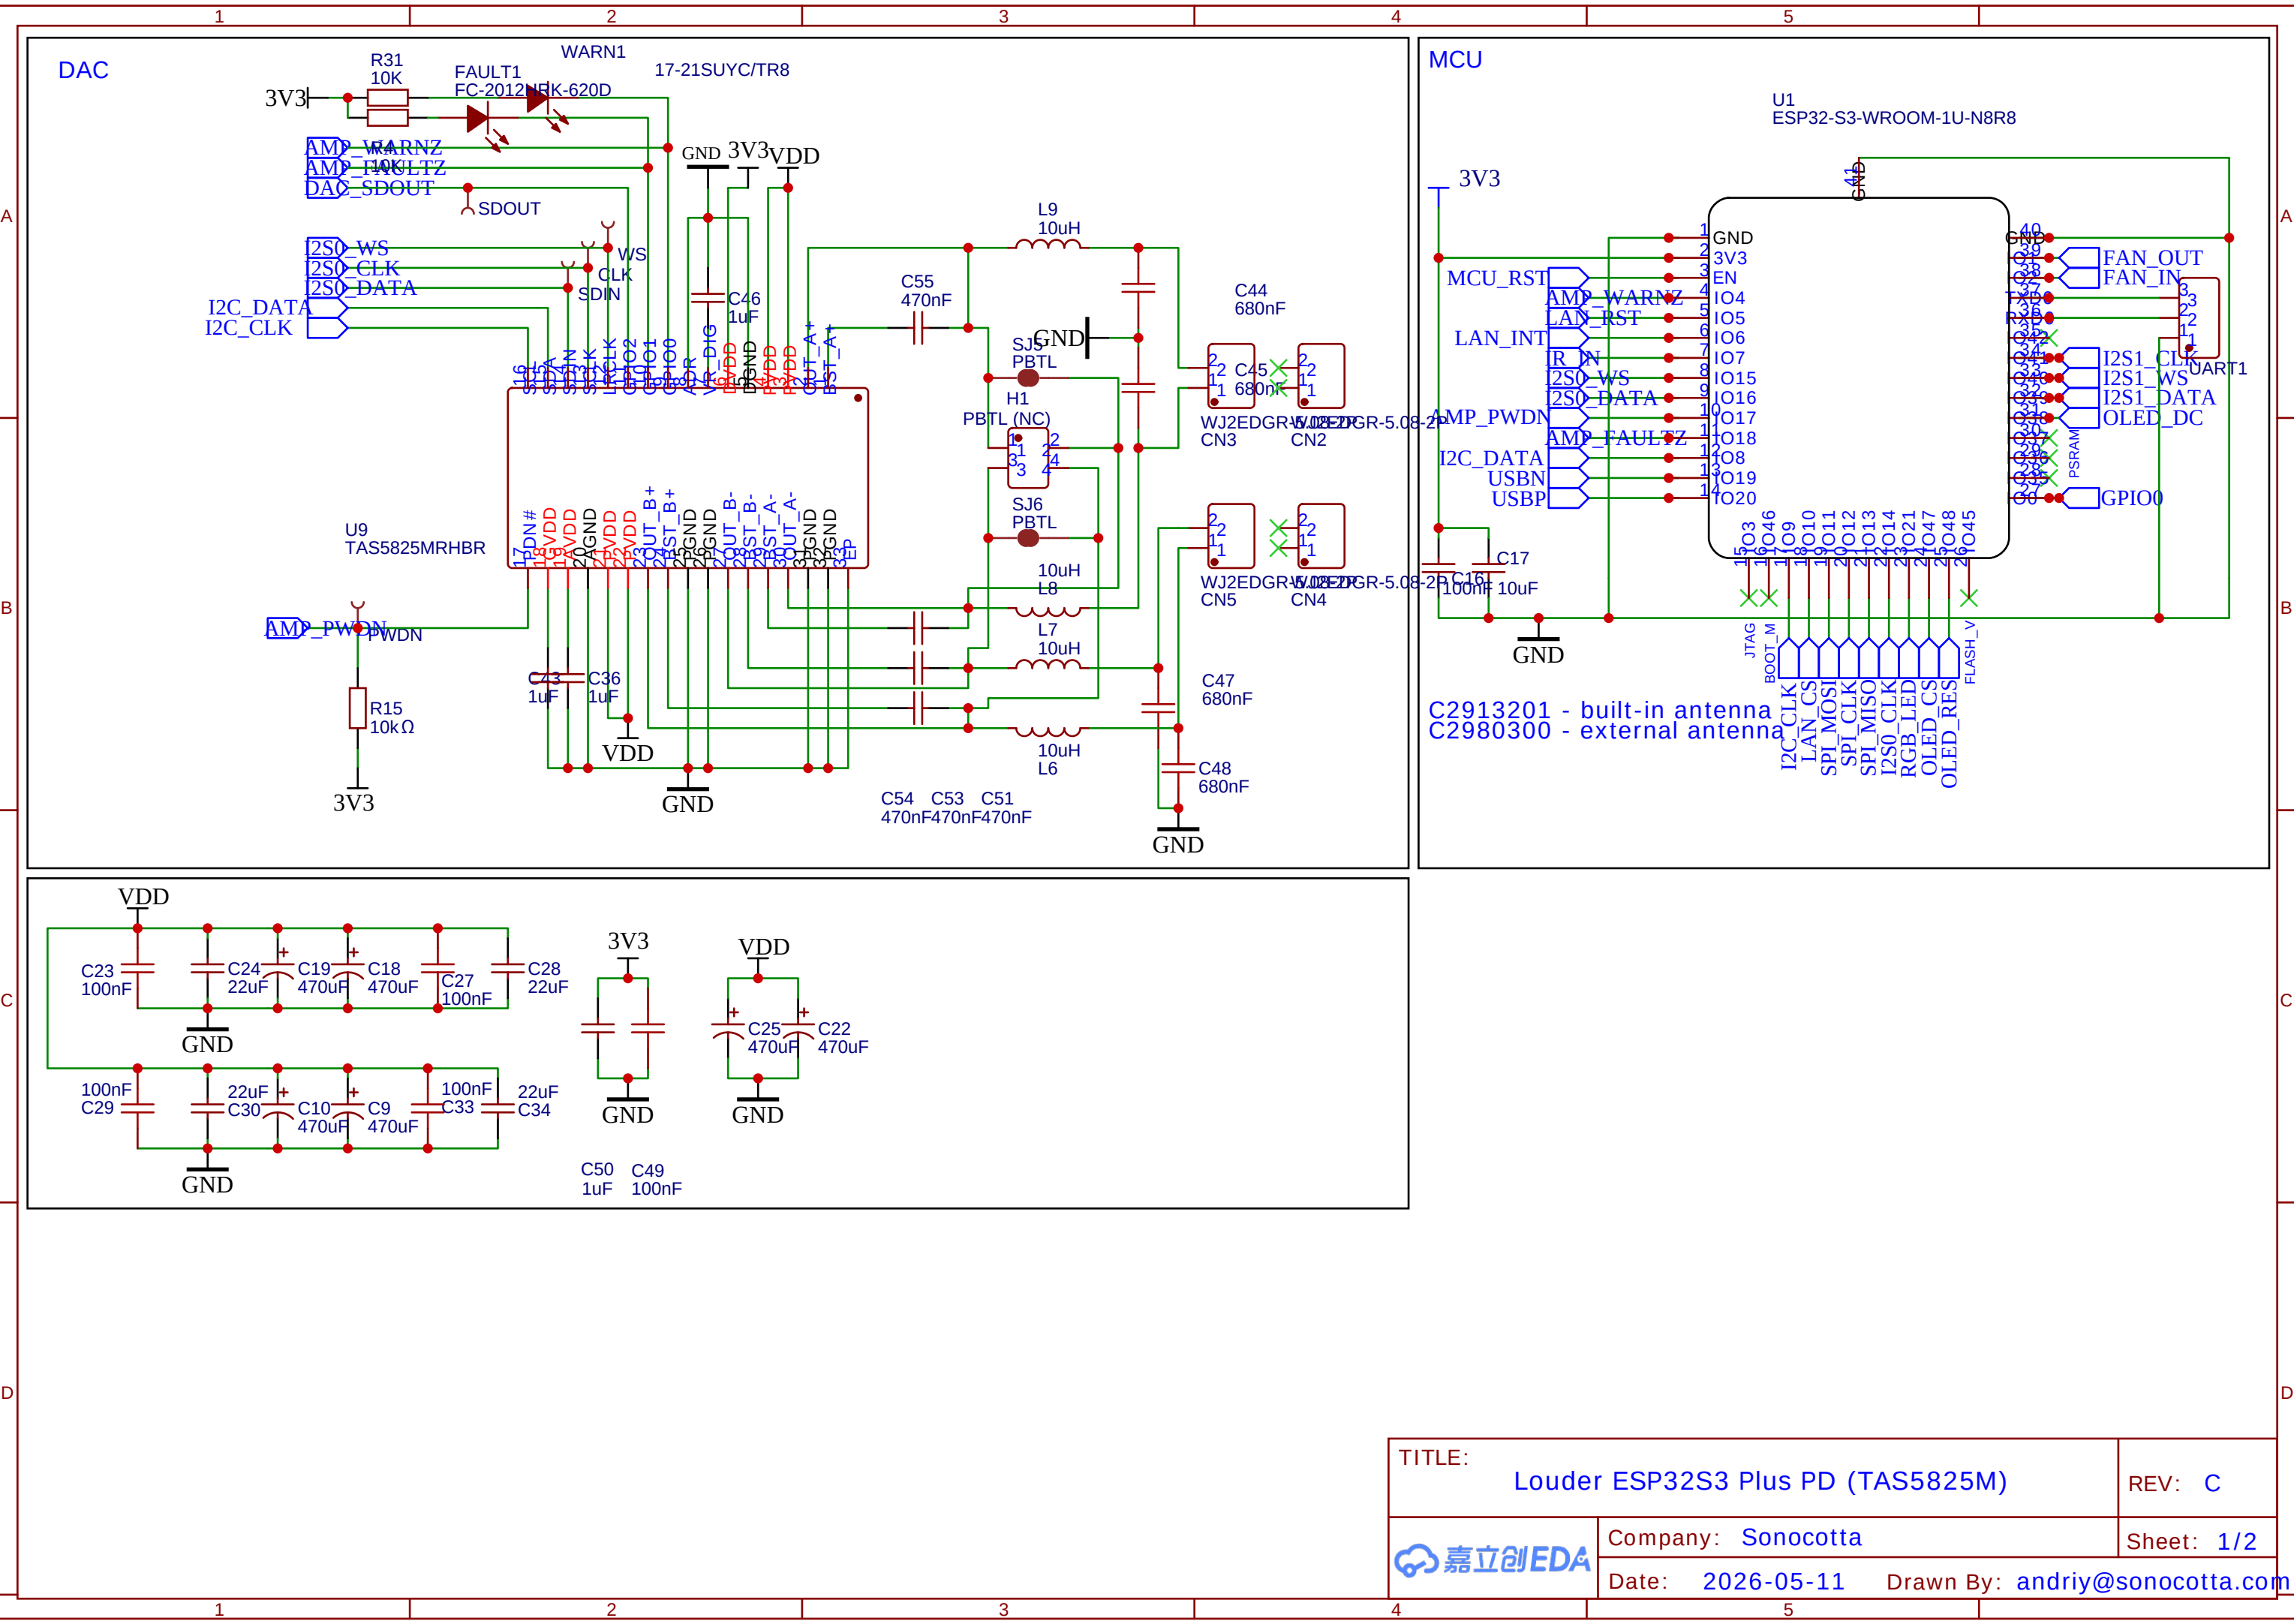


TITLE: Louder ESP32S3 Plus PD (TAS5825M)		REV: C
	Company: Sonocotta	Sheet: 1/2
	Date: 2026-05-11	Drawn By: andriy@sonocotta.com

USB-C PORT

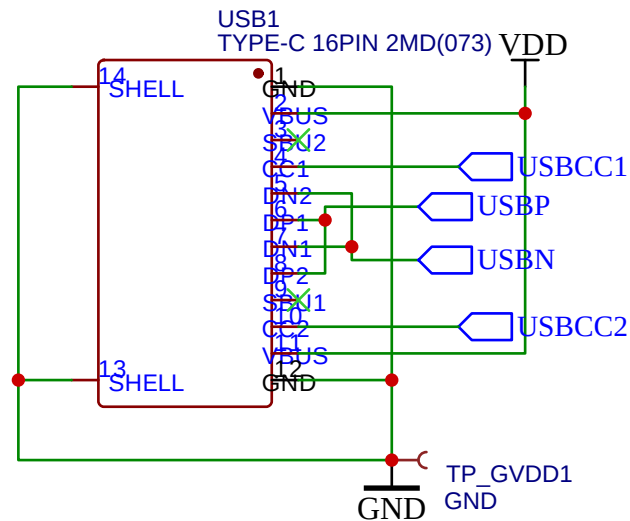


3V3 USB-PD



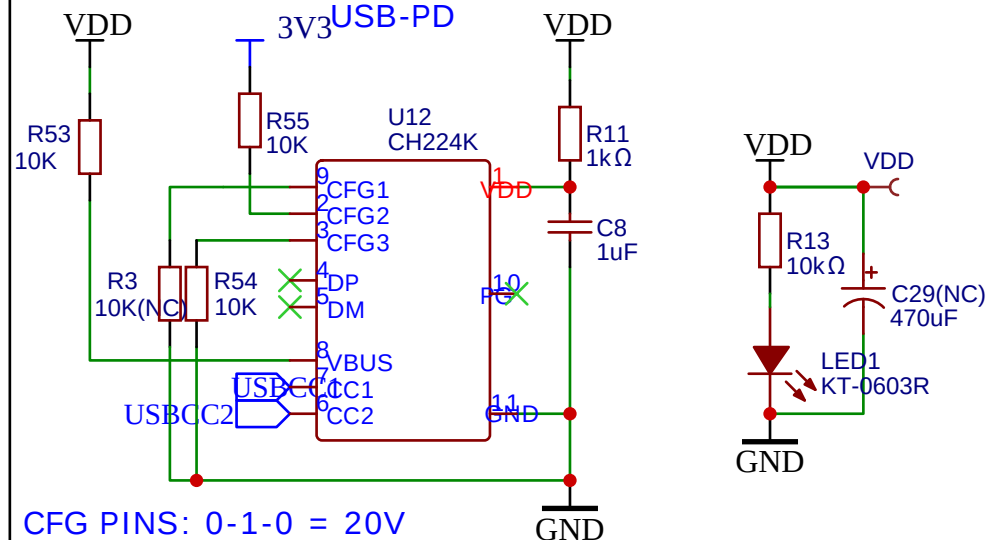


CFG PINS: 0-1-0 = 20V
CFG1 NC - otherwise 3V3 delay cause 9V to be requested


TFT connector

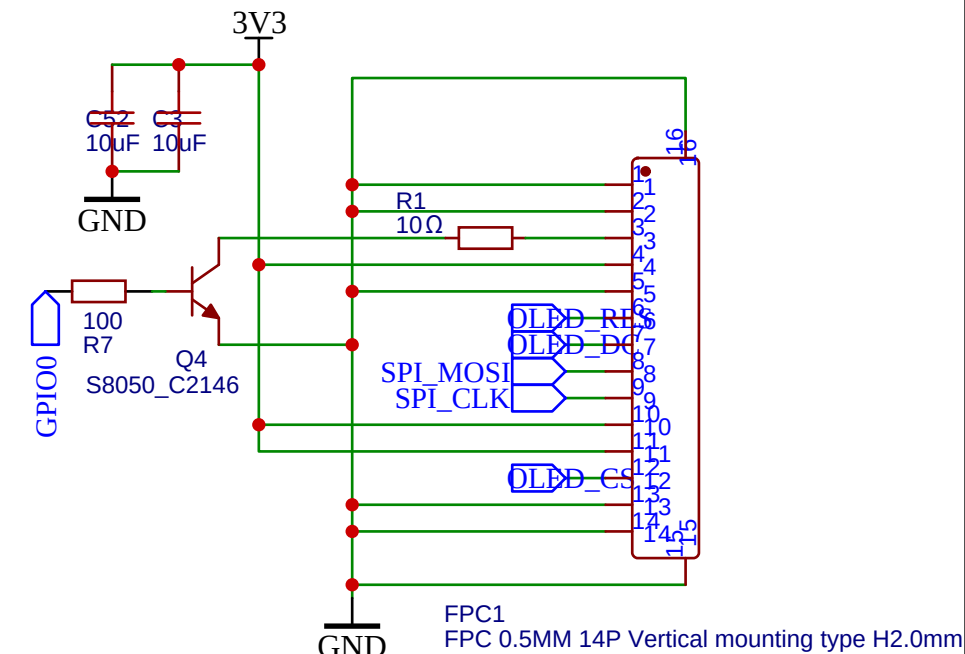


IR IN

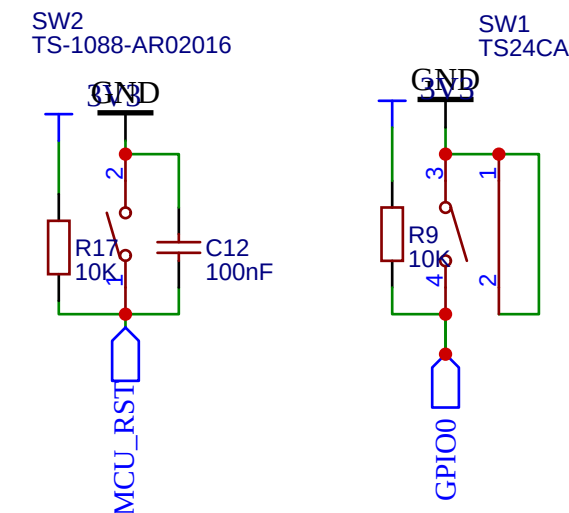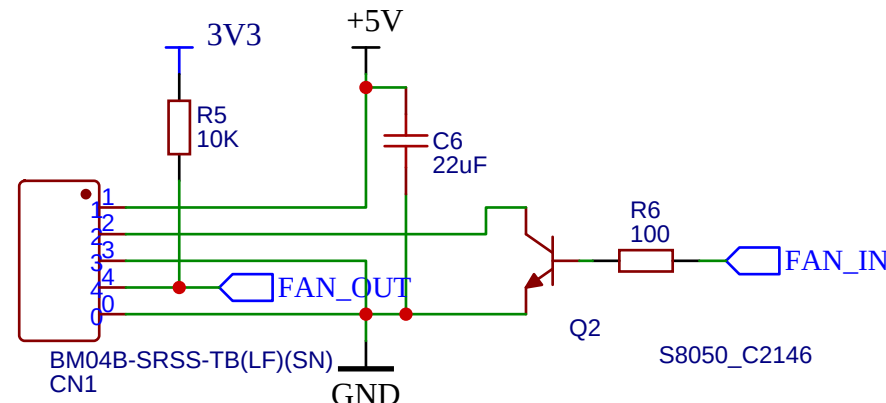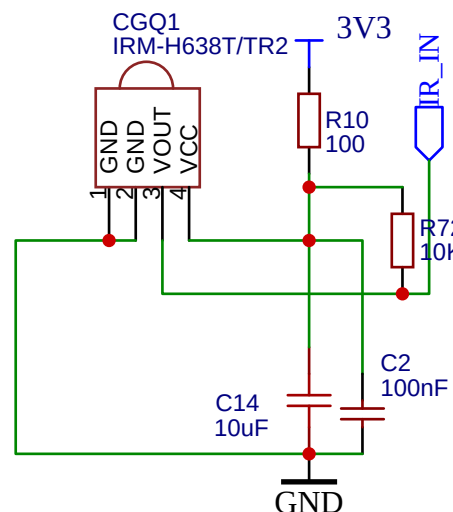


MIC

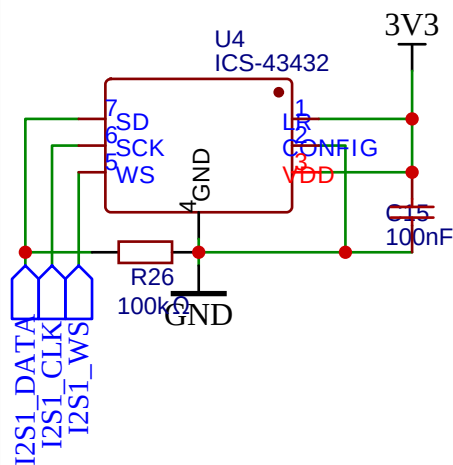


POWER (3.3V)

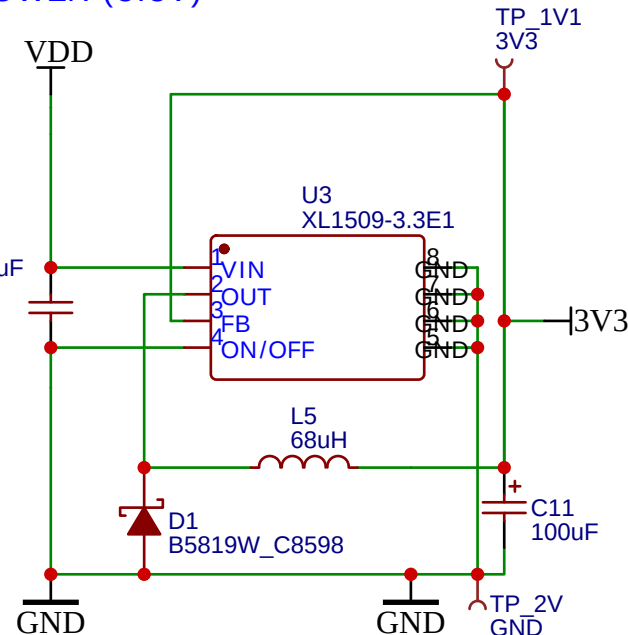

POWER (5V)

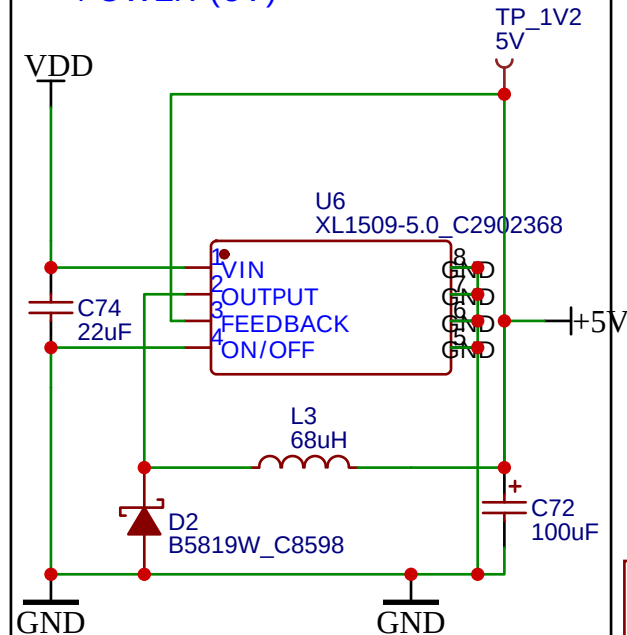

RGB LED

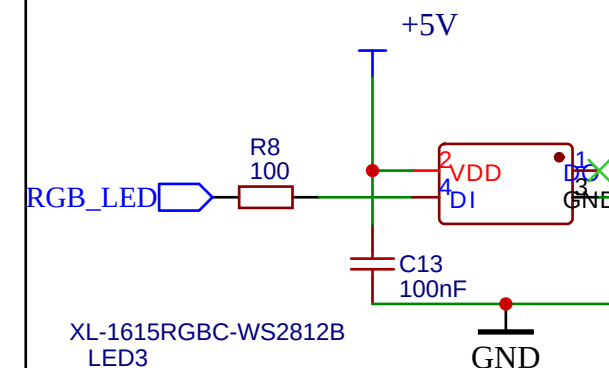

TITLE: Louder ESP32S3 Plus PD (TAS5825M)		REV: C
Company: Sonocotta		Sheet: 2/2
Date: 2026-05-11		Drawn By: andriy@sonocotta.com

