


MCU

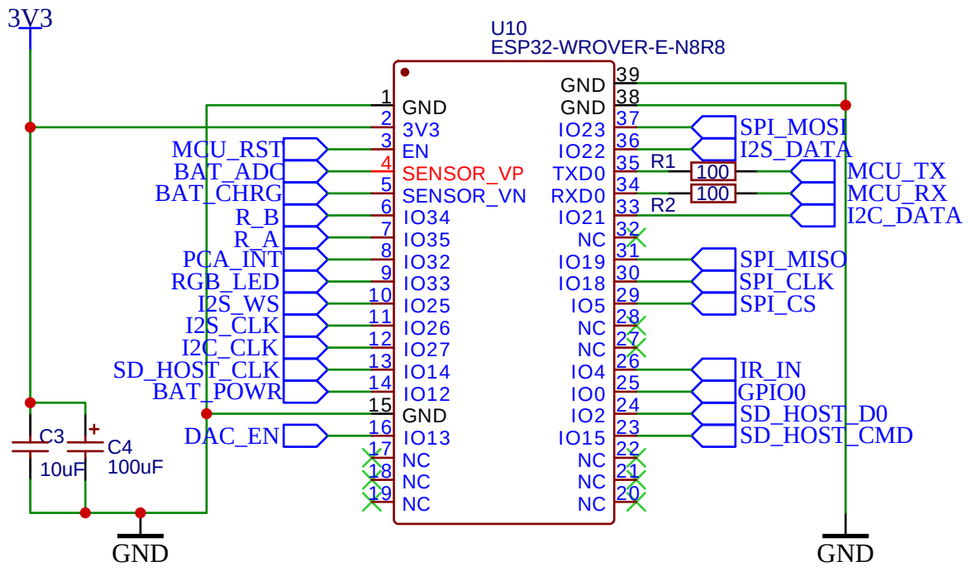


USB-TO-SERIAL BRIDGE

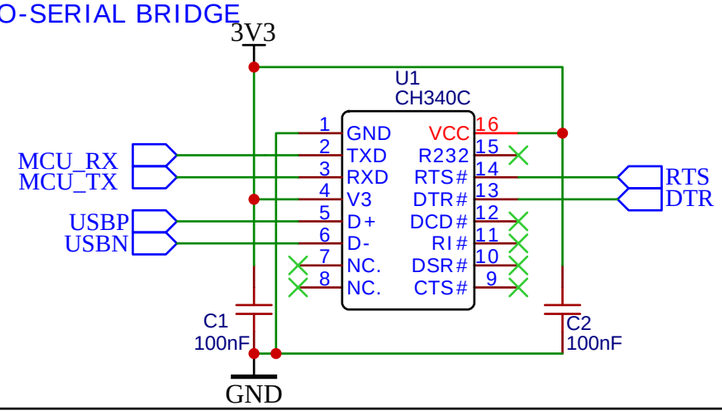


SD-CARD (SDIO 1-Bit mode)

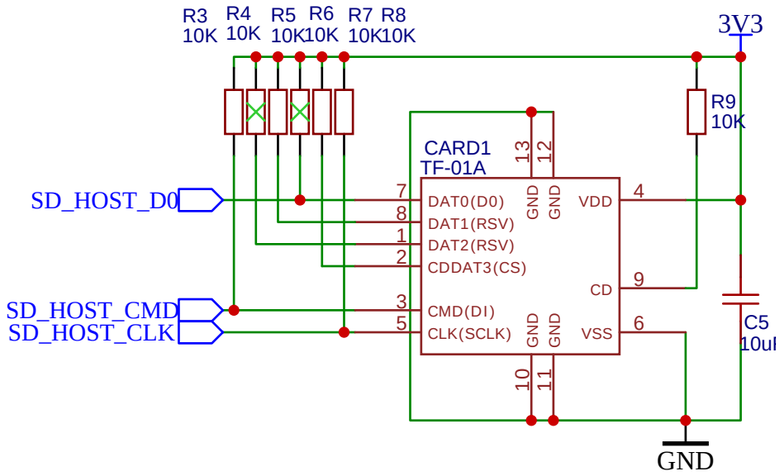


AUTO-RESET CIRCUIT

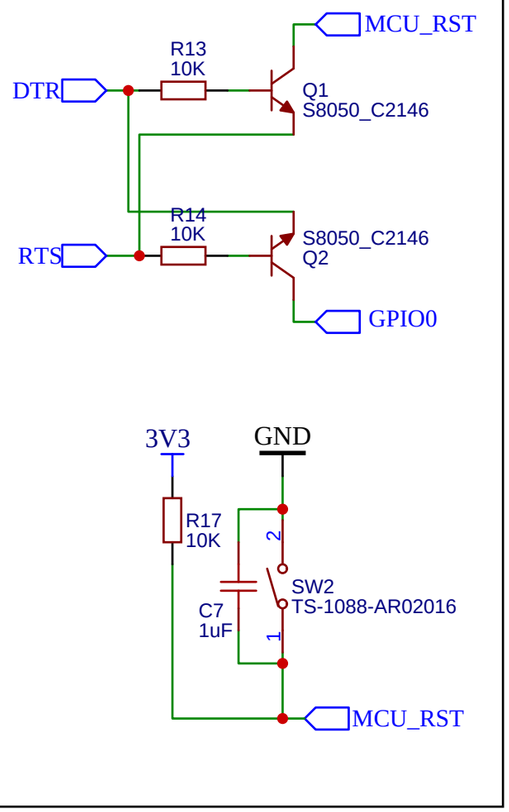

ROTARY ENCODER

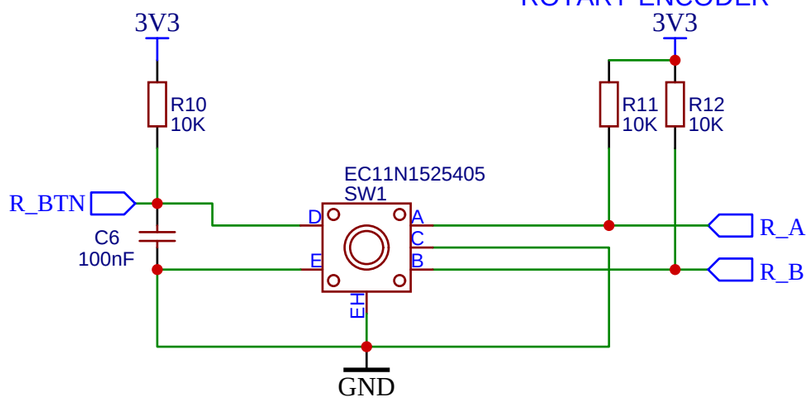


IR IN

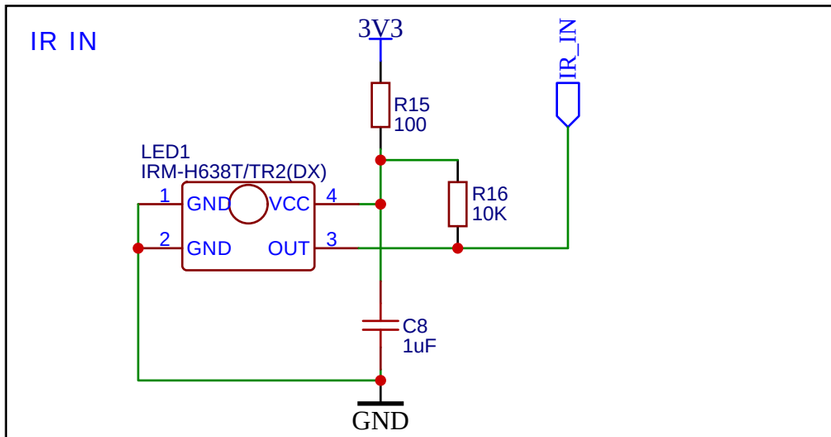


TITLE: Loud-ESP (ESPuino edition)	REV: G
Date: 2025/06/09	Sheet: 1/4
EasyEDA V4.11.9	Drawn By: andriy@sonocotta.com


POWER SELECT

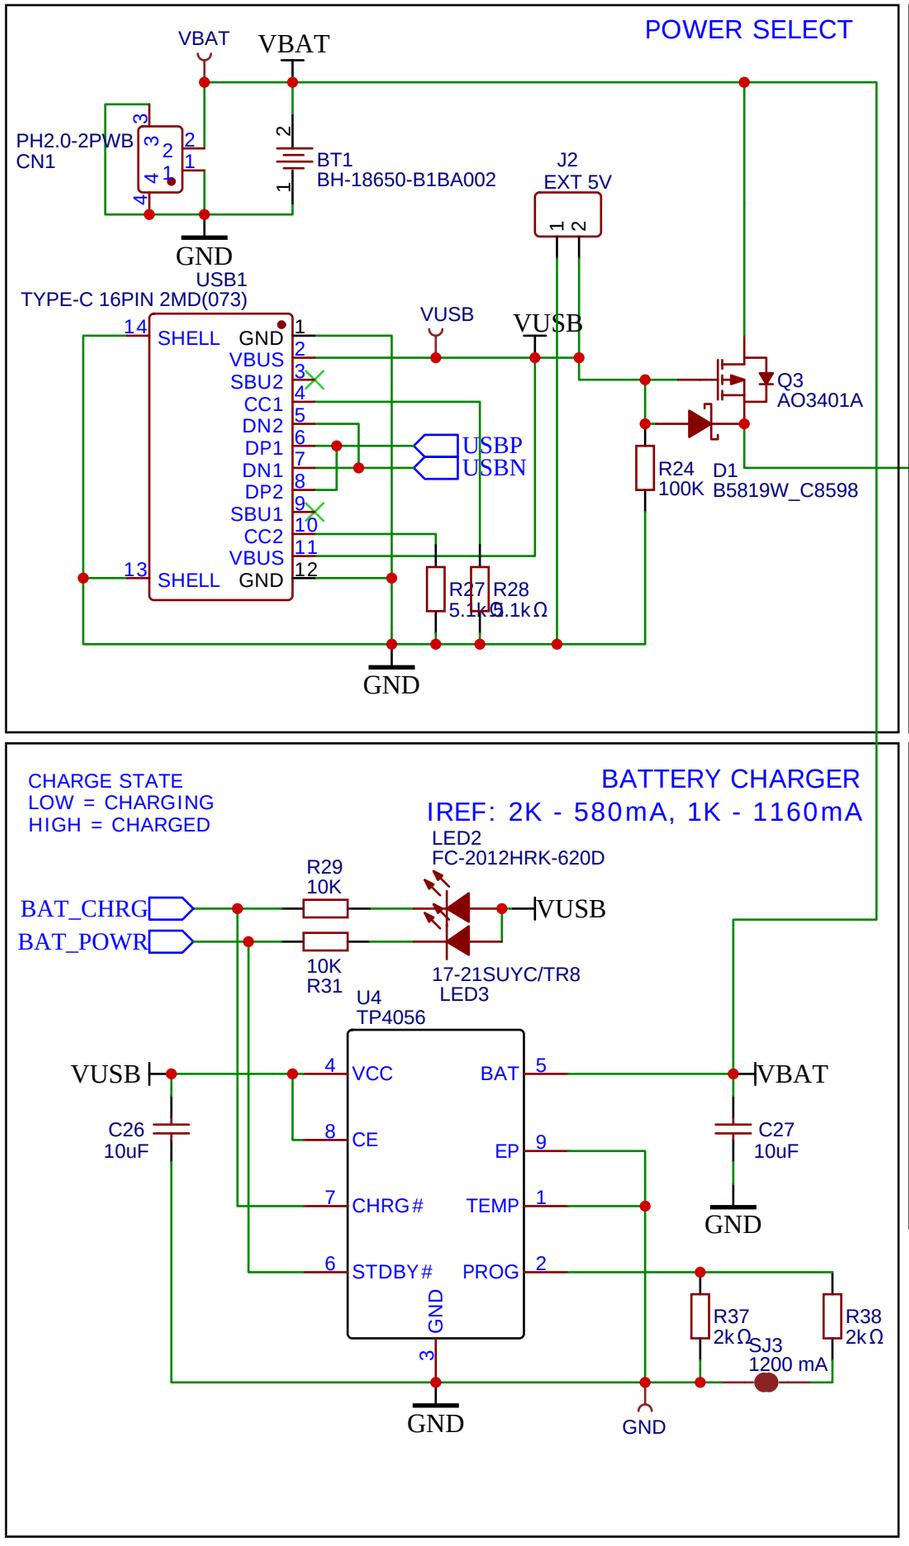

POWER BUTTON

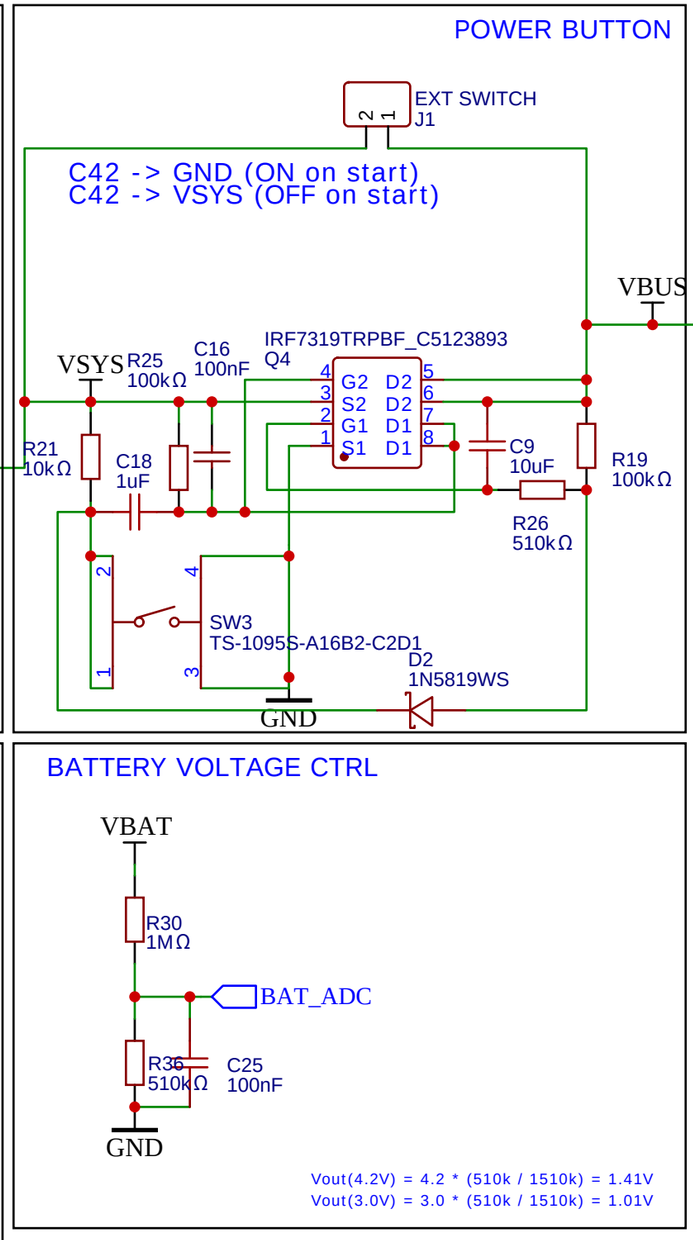


3.3V BUCK/BOOST

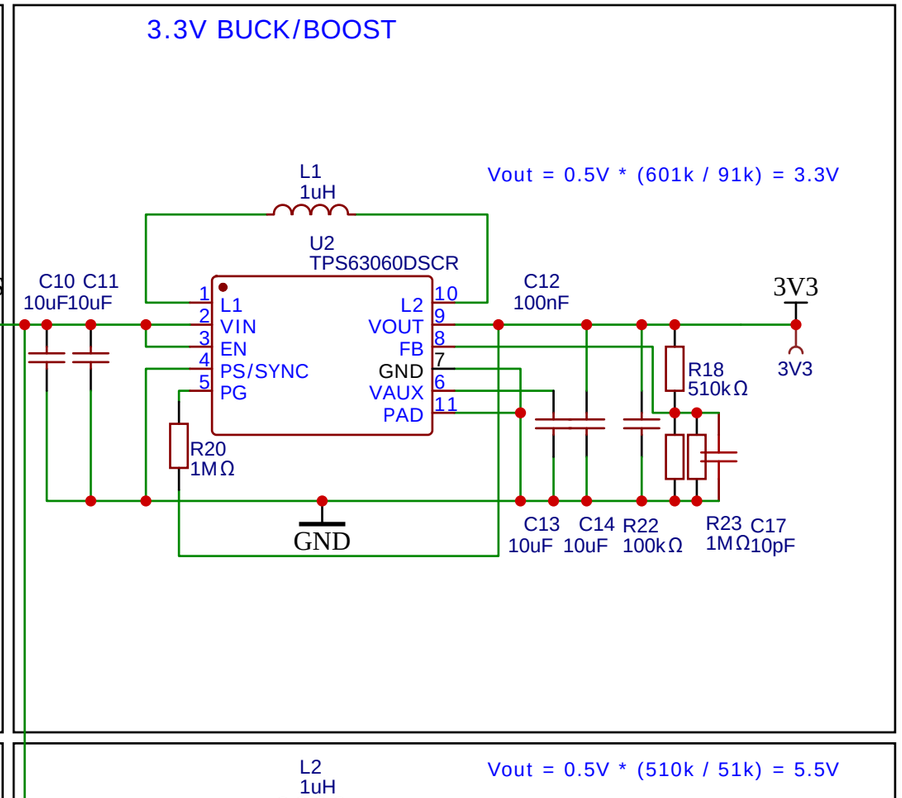

BATTERY CHARGER


BATTERY VOLTAGE CTRL

5V5 BUCK/BOOST

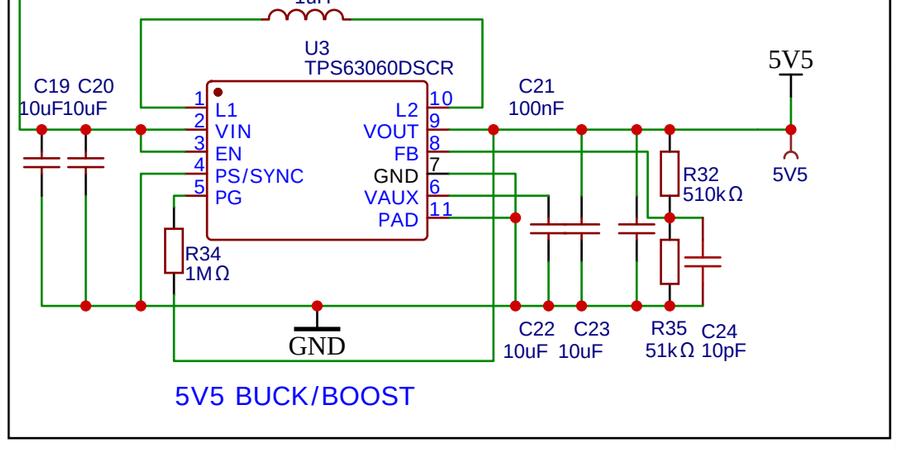


TITLE: Loud-ESP (ESPuino edition)		REV: G
EasyEDA	Company: Sonocotta	Sheet: 2/4
	Date: 2025/06/09 Drawn By: andriy@sonocotta.com	

(L) SD_MODE HIGH, CUT TO SWITCH TO MONO (R_LARGE ~634K)

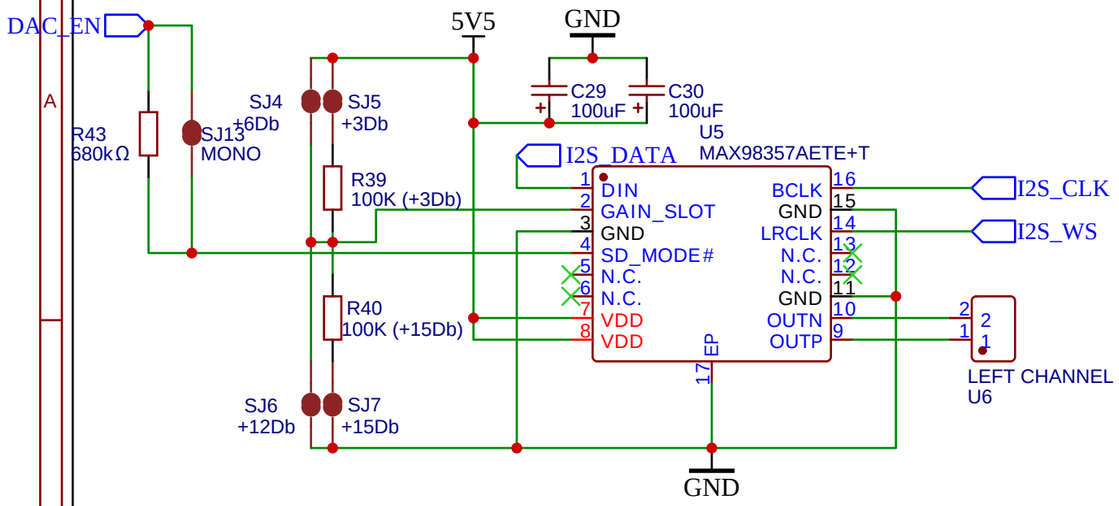


LEFT CHANNEL

RIGHT CHANNEL

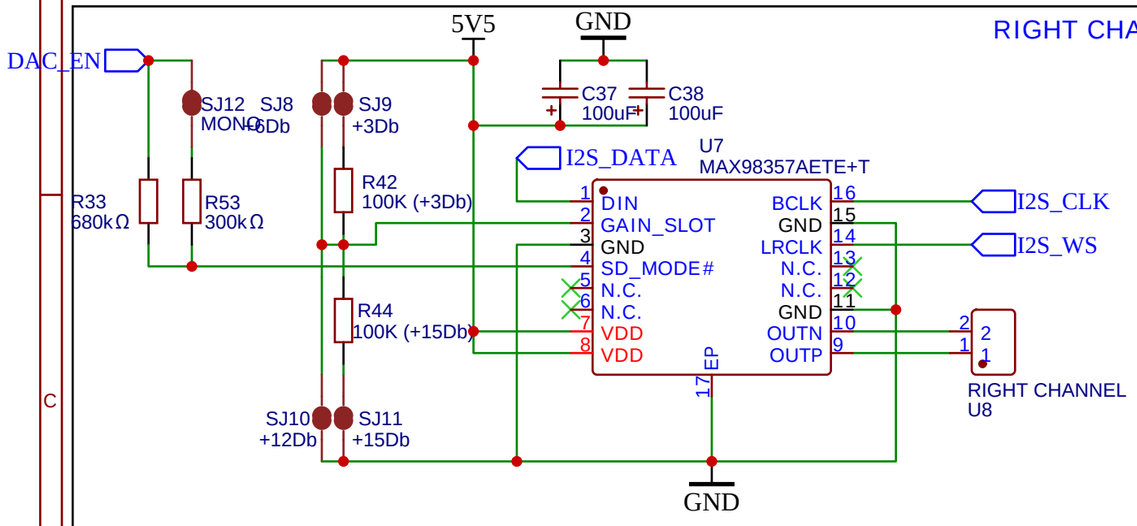


(R) SD_MODE HIGH (R_SMALL ~210K)
CUT TO SWITCH TO MONO (R_LARGE ~634K)


LED BAR

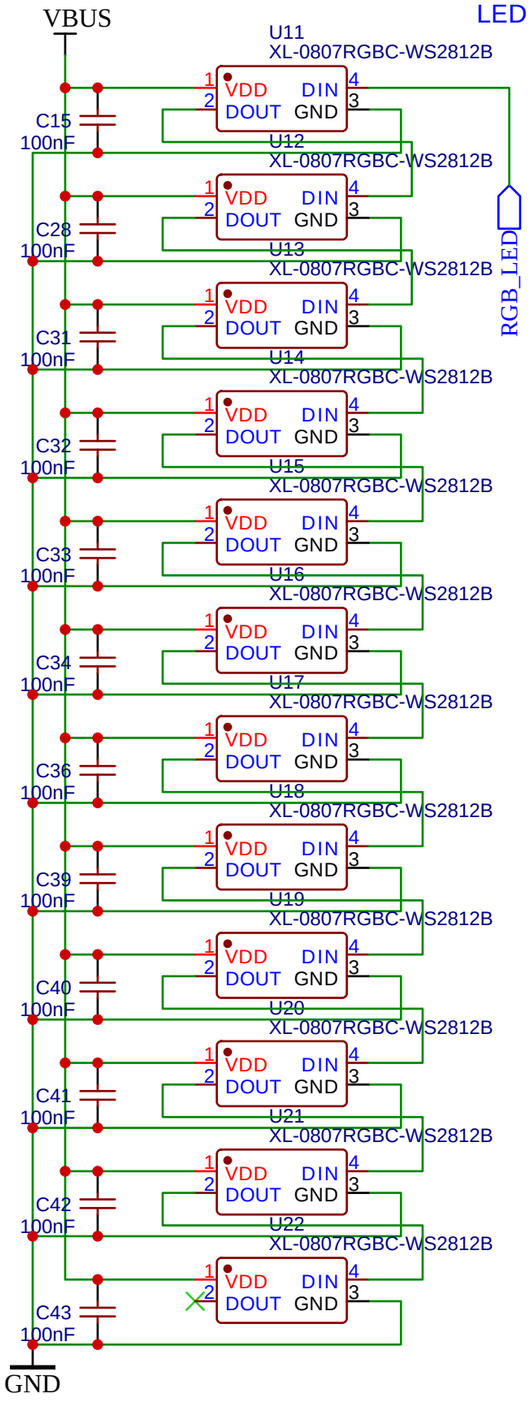

NFC

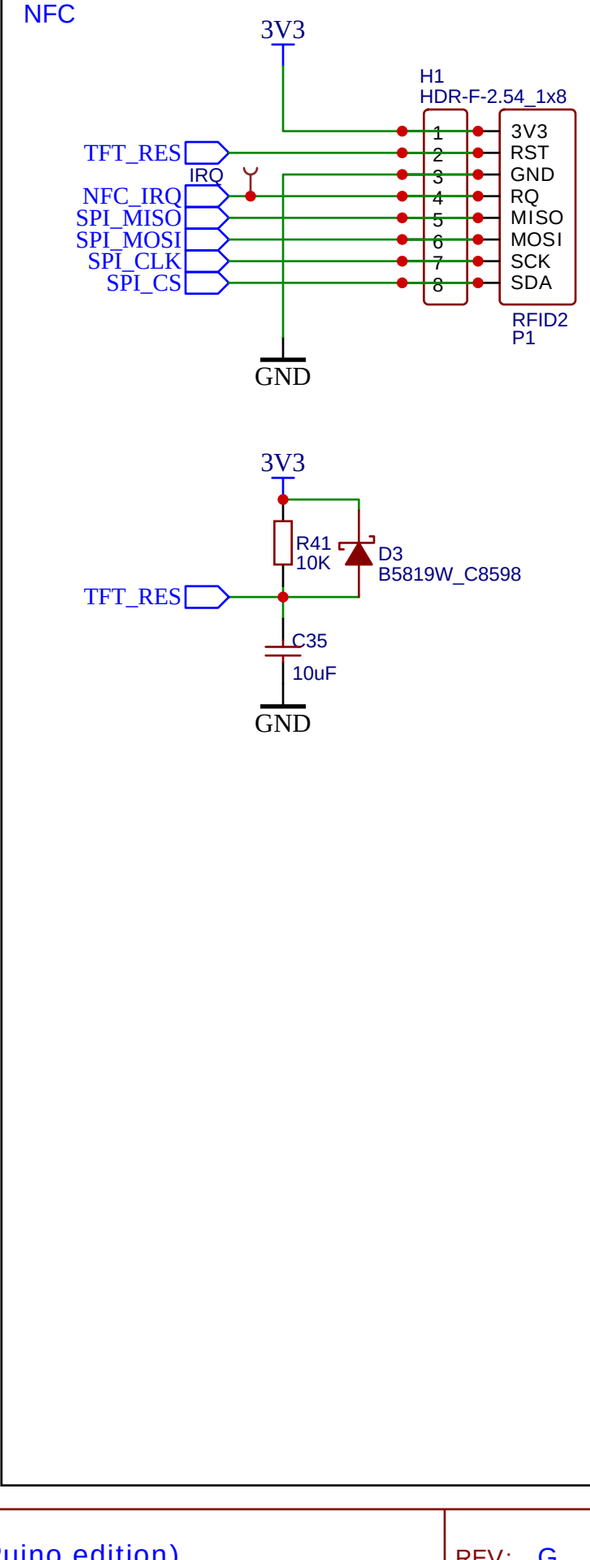

TITLE: Loud-ESP (ESPuino edition)		REV: G
EasyEDA	Company: Sonocotta	Sheet: 3/4
	Date: 2025/06/09 Drawn By: andriy@sonocotta.com	

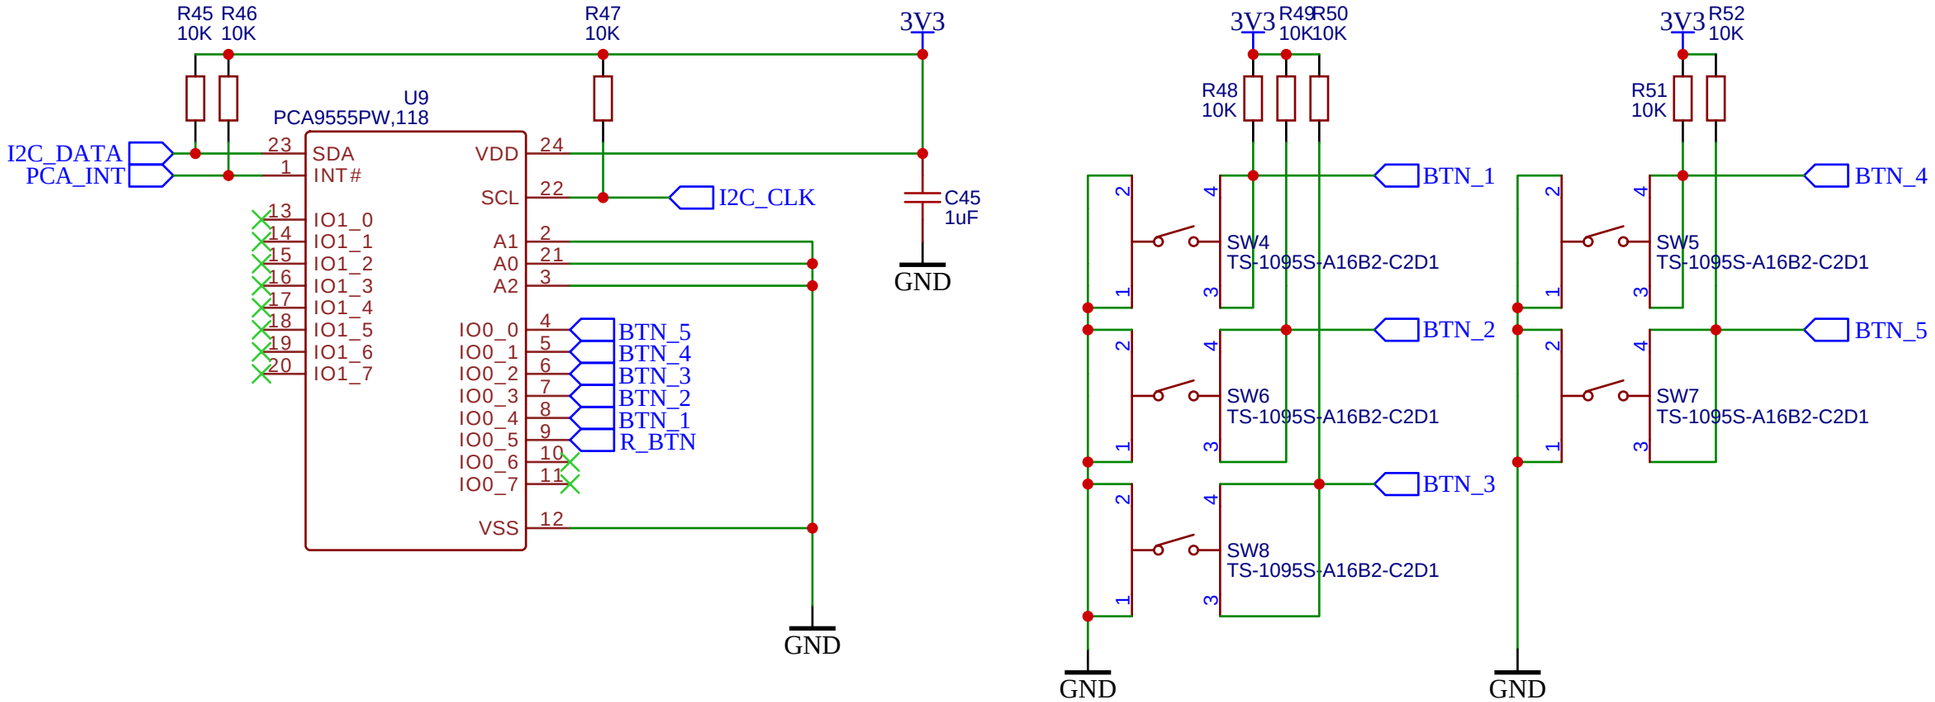

TITLE: Loud-ESP (ESPuino edition)		REV: G
EasyEDA	Company: Sonocotta	Sheet: 4/4
	Date: 2025-06-10 Drawn By: andriy@sonocotta.com	