
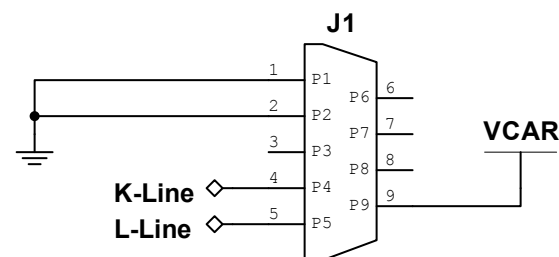


Note: internal LDO is used for 3.3V generation for the chip and for the rx level shifter

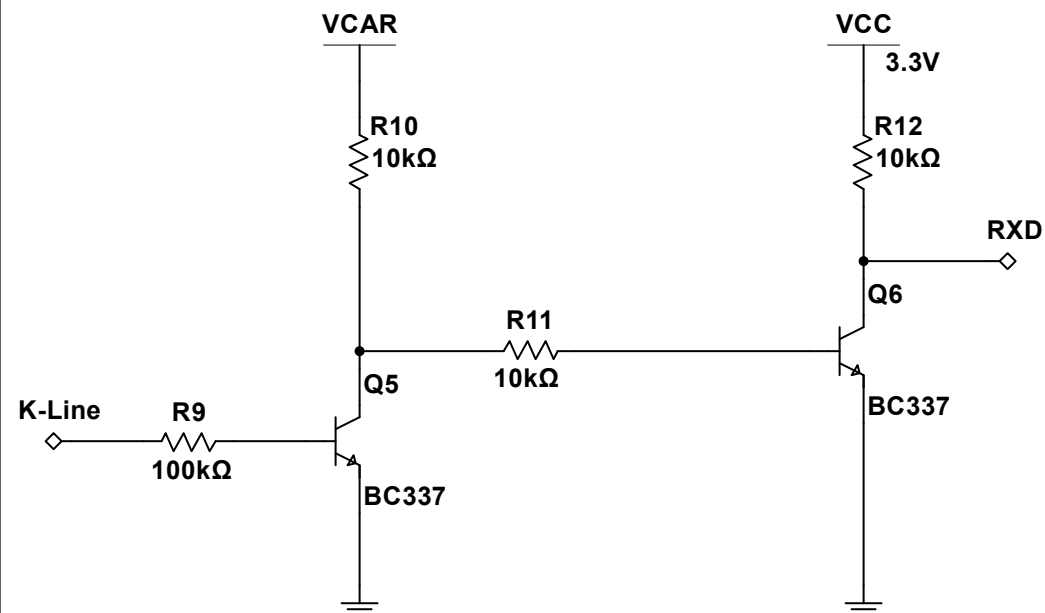

Title: OBD INTERFACE FOR BLE NANO			
Size: A3	Document N:		Revision:
Date: 13/05/2016	Sheet 1 of 1		