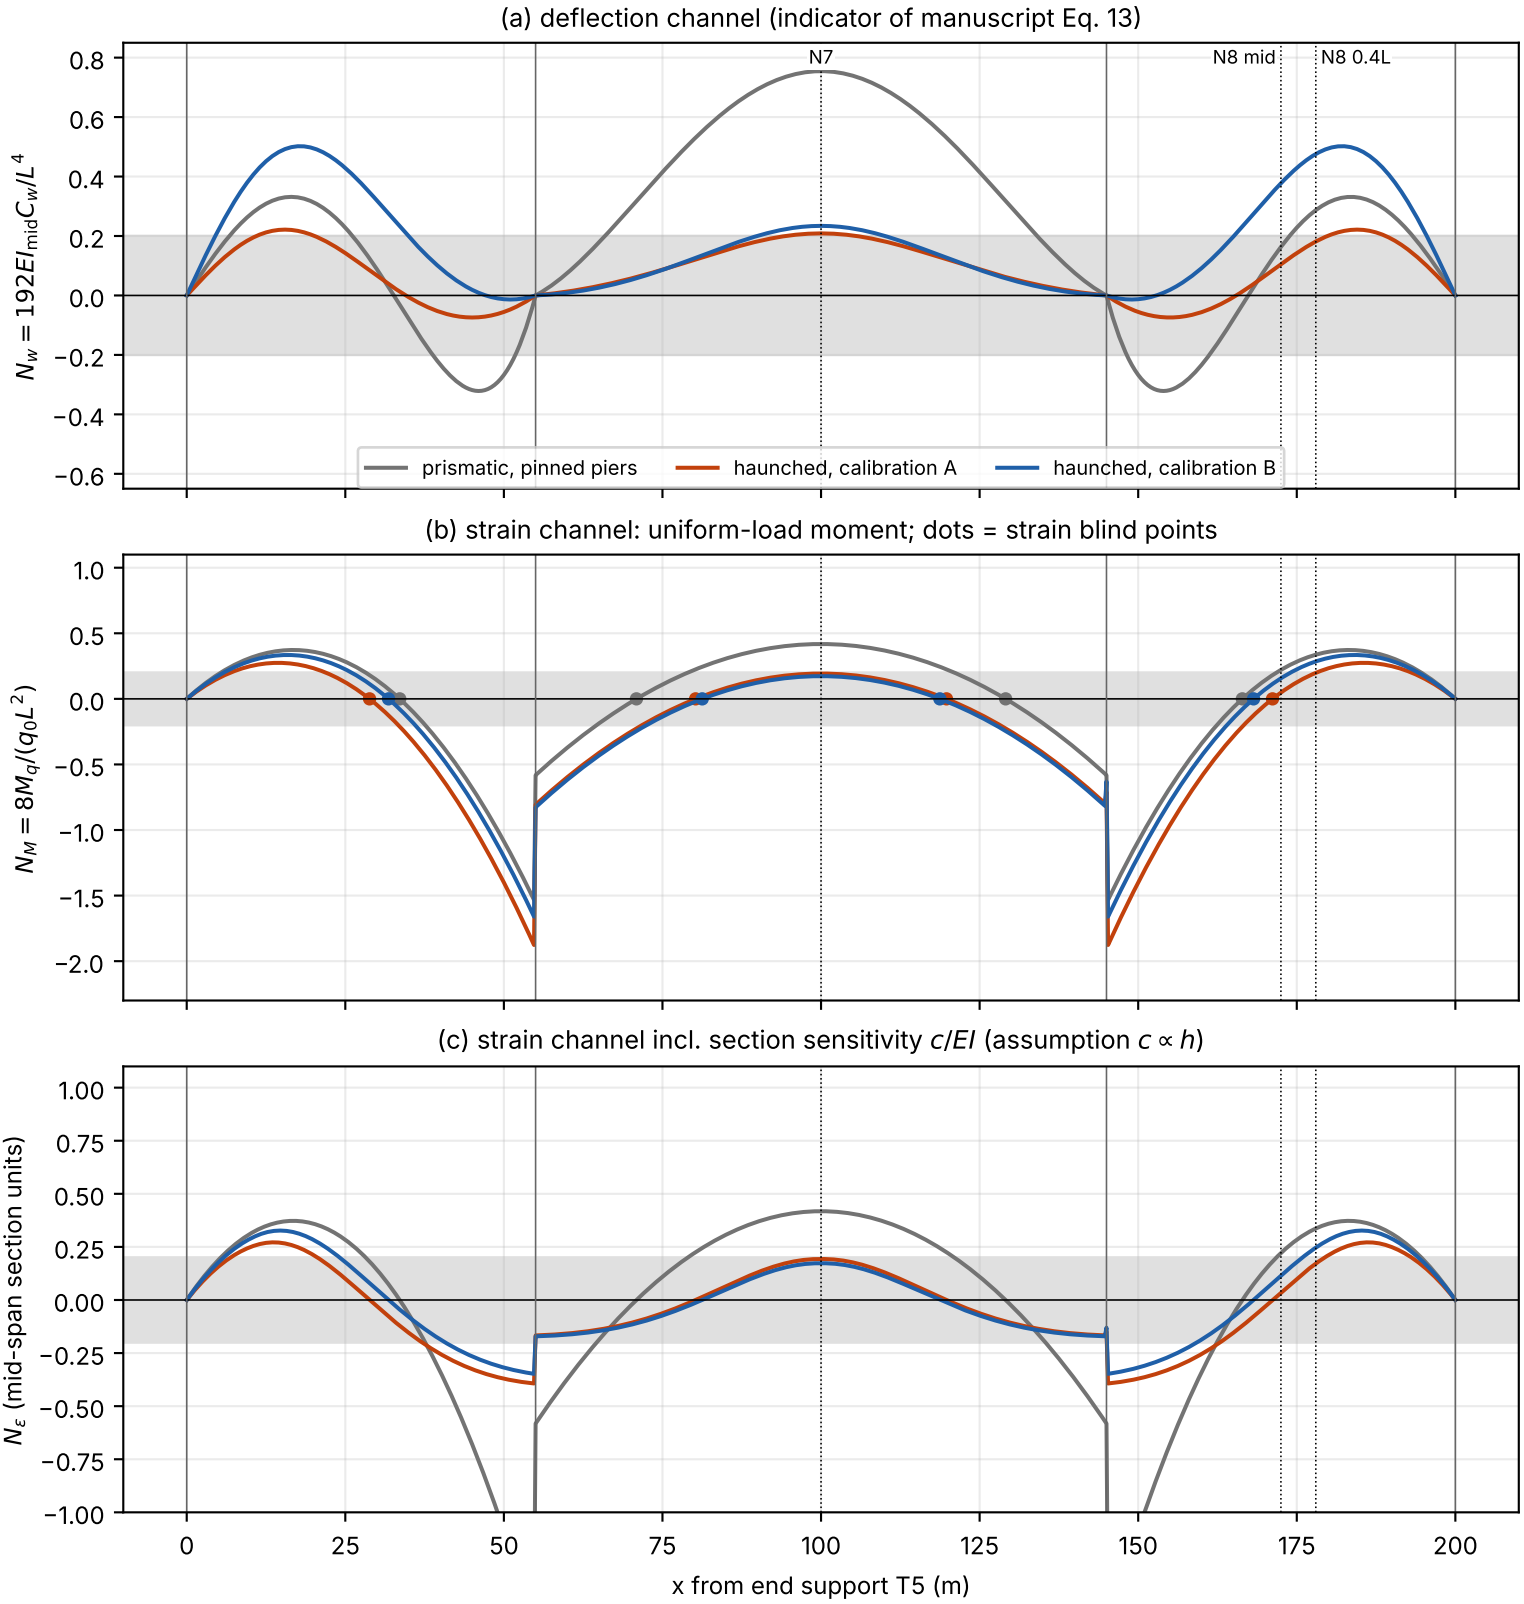
(a) deflection channel (indicator of manuscript Eq. 13)
N7
N8 mid
N8 0.4L
$N_w = 192EI_{mid}C_w/L^4$
prismatic, pinned piers
haunched, calibration A
haunched, calibration B
(b) strain channel: uniform-load moment; dots = strain blind points
$N_M = 8M_q/(q_0L^2)$
(c) strain channel incl. section sensitivity c/EI (assumption $c \propto h$)
N_ε (mid-span section units)
x from end support T5 (m)