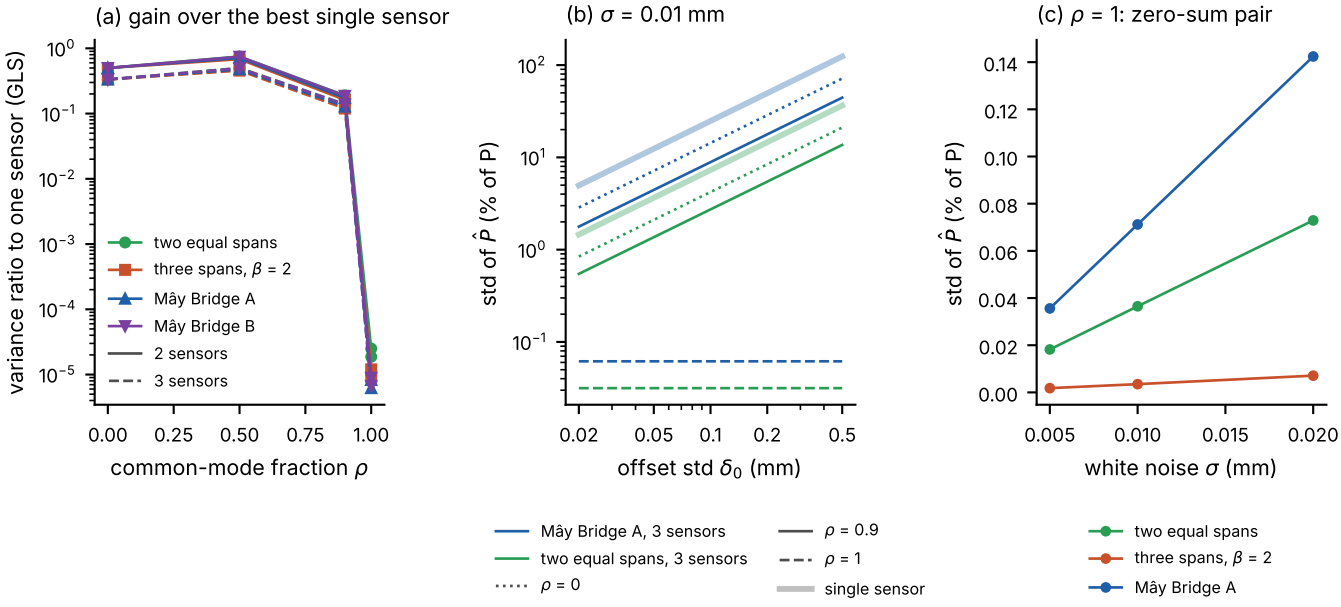
(a) gain over the best single sensor
variance ratio to one sensor (GLS)
common-mode fraction ρ
two equal spans
three spans, β = 2
Mây Bridge A
Mây Bridge B
2 sensors
3 sensors
(b) σ = 0.01 mm
std of P̂ (% of P)
offset std δ0 (mm)
(c) ρ = 1: zero-sum pair
std of P̂ (% of P)
white noise σ (mm)
Mây Bridge A, 3 sensors
two equal spans, 3 sensors
ρ = 0
ρ = 0.9
ρ = 1
single sensor
two equal spans
three spans, β = 2
Mây Bridge A