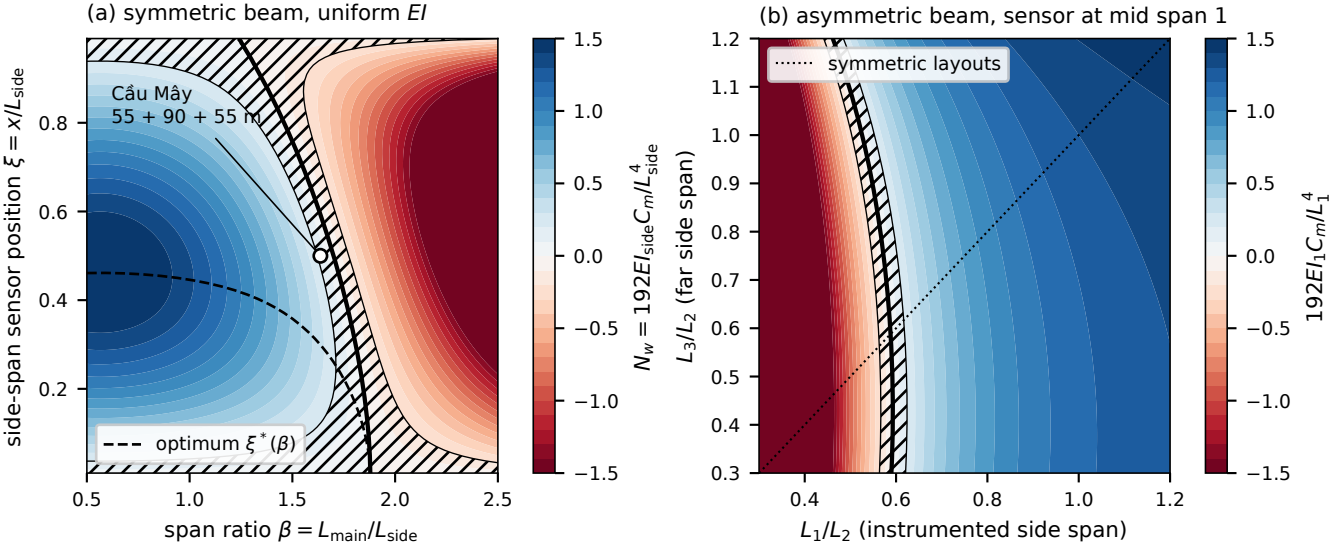

(a) symmetric beam, uniform EI
Cầu Mây
55 + 90 + 55 m
optimum $\xi^*(\beta)$
side-span sensor position $\xi = x/L_{side}$
span ratio $\beta = L_{main}/L_{side}$
$N_w = 192EI_{side}C_m/L_{side}^4$
(b) asymmetric beam, sensor at mid span 1
symmetric layouts
L_3/L_2 (far side span)
L_1/L_2 (instrumented side span)
$192EI_1C_m/L_1^4$