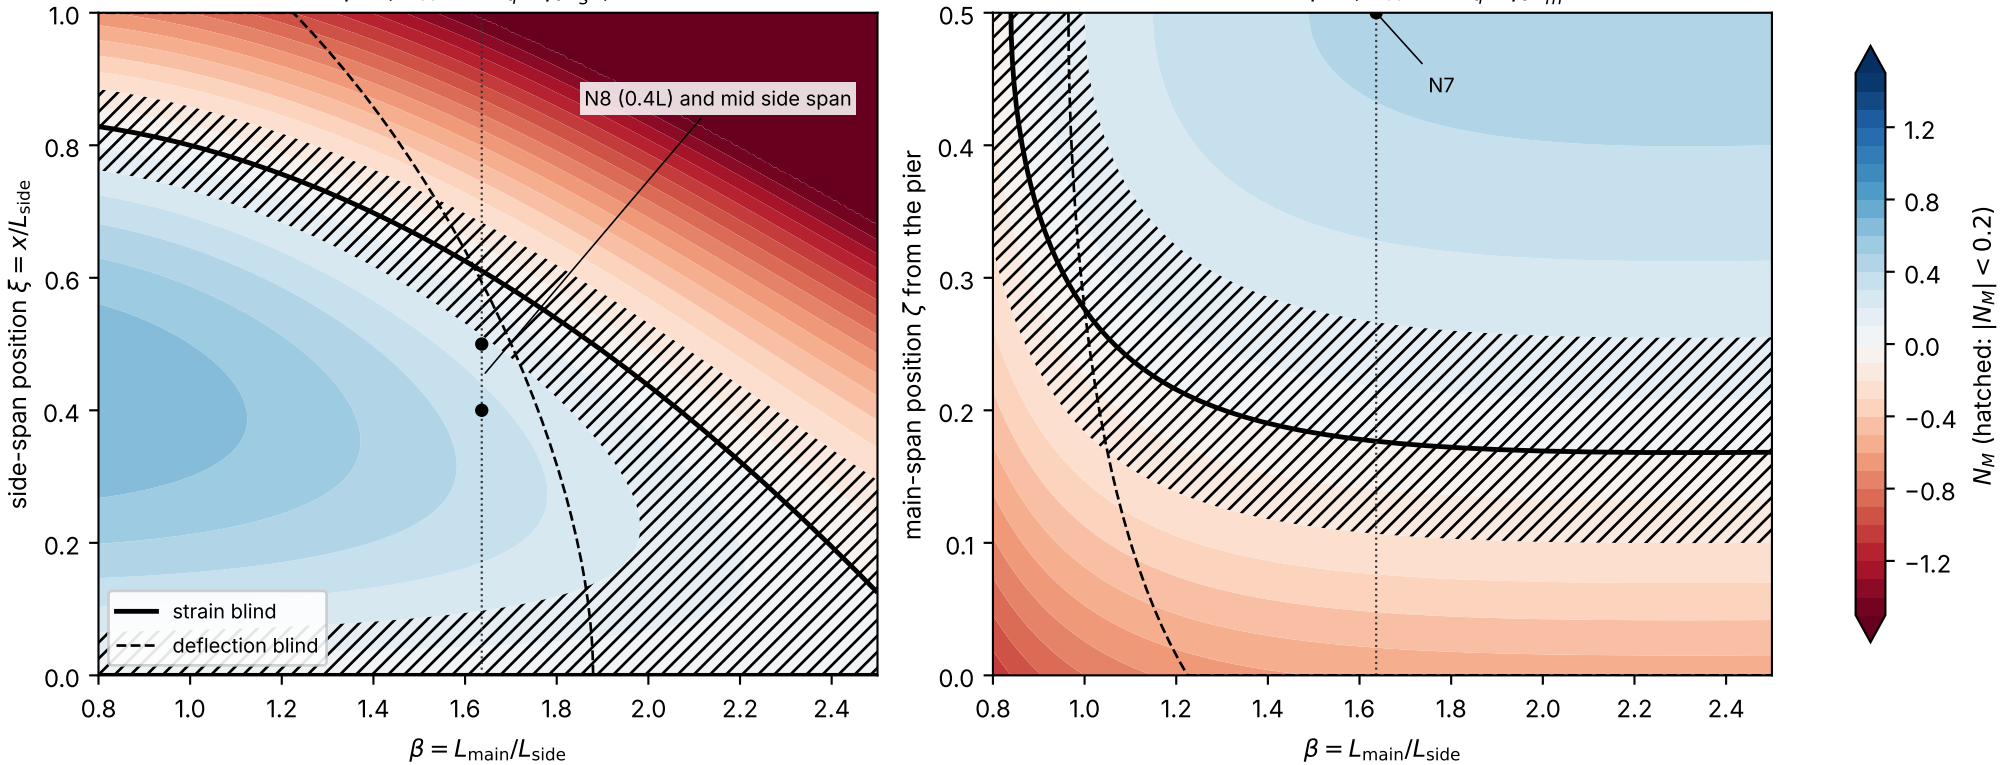

(a) side span, $N_M = 8M_q/(q_0 L_s^2)$, uniform EI
N8 (0.4L) and mid side span
strain blind
deflection blind
side-span position $\xi = x/L_{side}$
$\beta = L_{main}/L_{side}$
(b) main span, $N_M = 8M_q/(q_0 L_m^2)$
N7
main-span position ζ from the pier
$\beta = L_{main}/L_{side}$
N_M (hatched: $|N_M| < 0.2$)