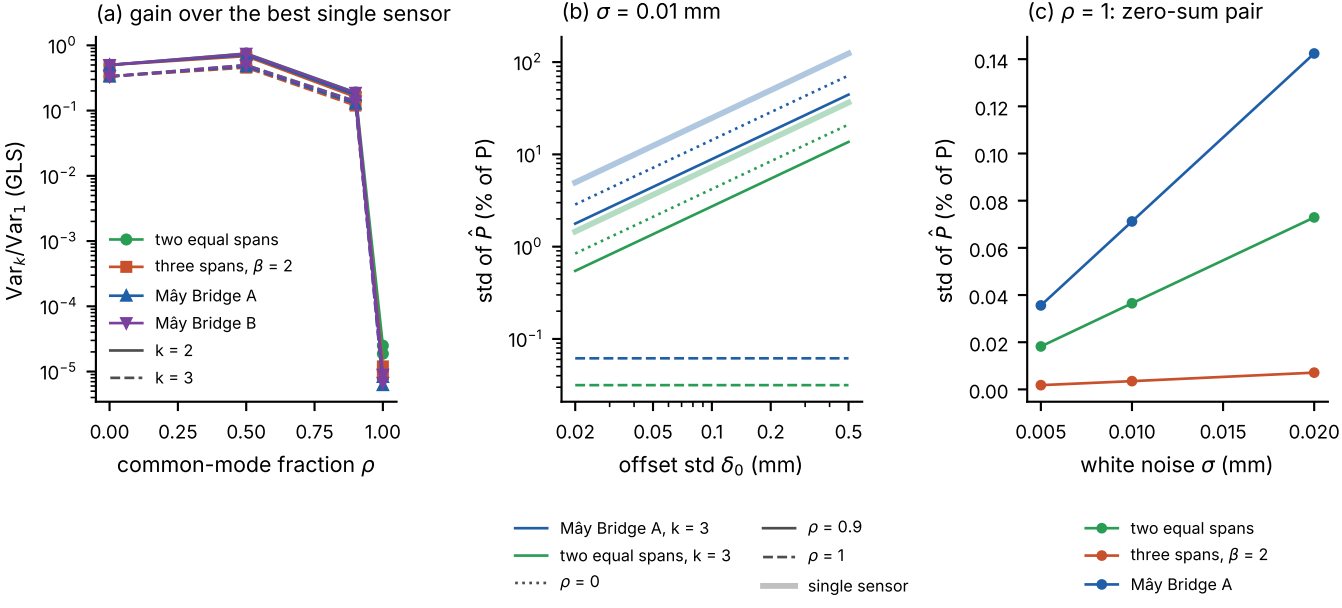
(a) gain over the best single sensor
$\mathrm{Var}_k/\mathrm{Var}_1$ (GLS)
common-mode fraction ρ
two equal spans
three spans, β = 2
Mây Bridge A
Mây Bridge B
k = 2
k = 3
(b) σ = 0.01 mm
std of $\hat{P}$ (% of P)
offset std δ_0 (mm)
Mây Bridge A, k = 3
two equal spans, k = 3
ρ = 0
ρ = 0.9
ρ = 1
single sensor
(c) ρ = 1: zero-sum pair
std of $\hat{P}$ (% of P)
white noise σ (mm)
two equal spans
three spans, β = 2
Mây Bridge A