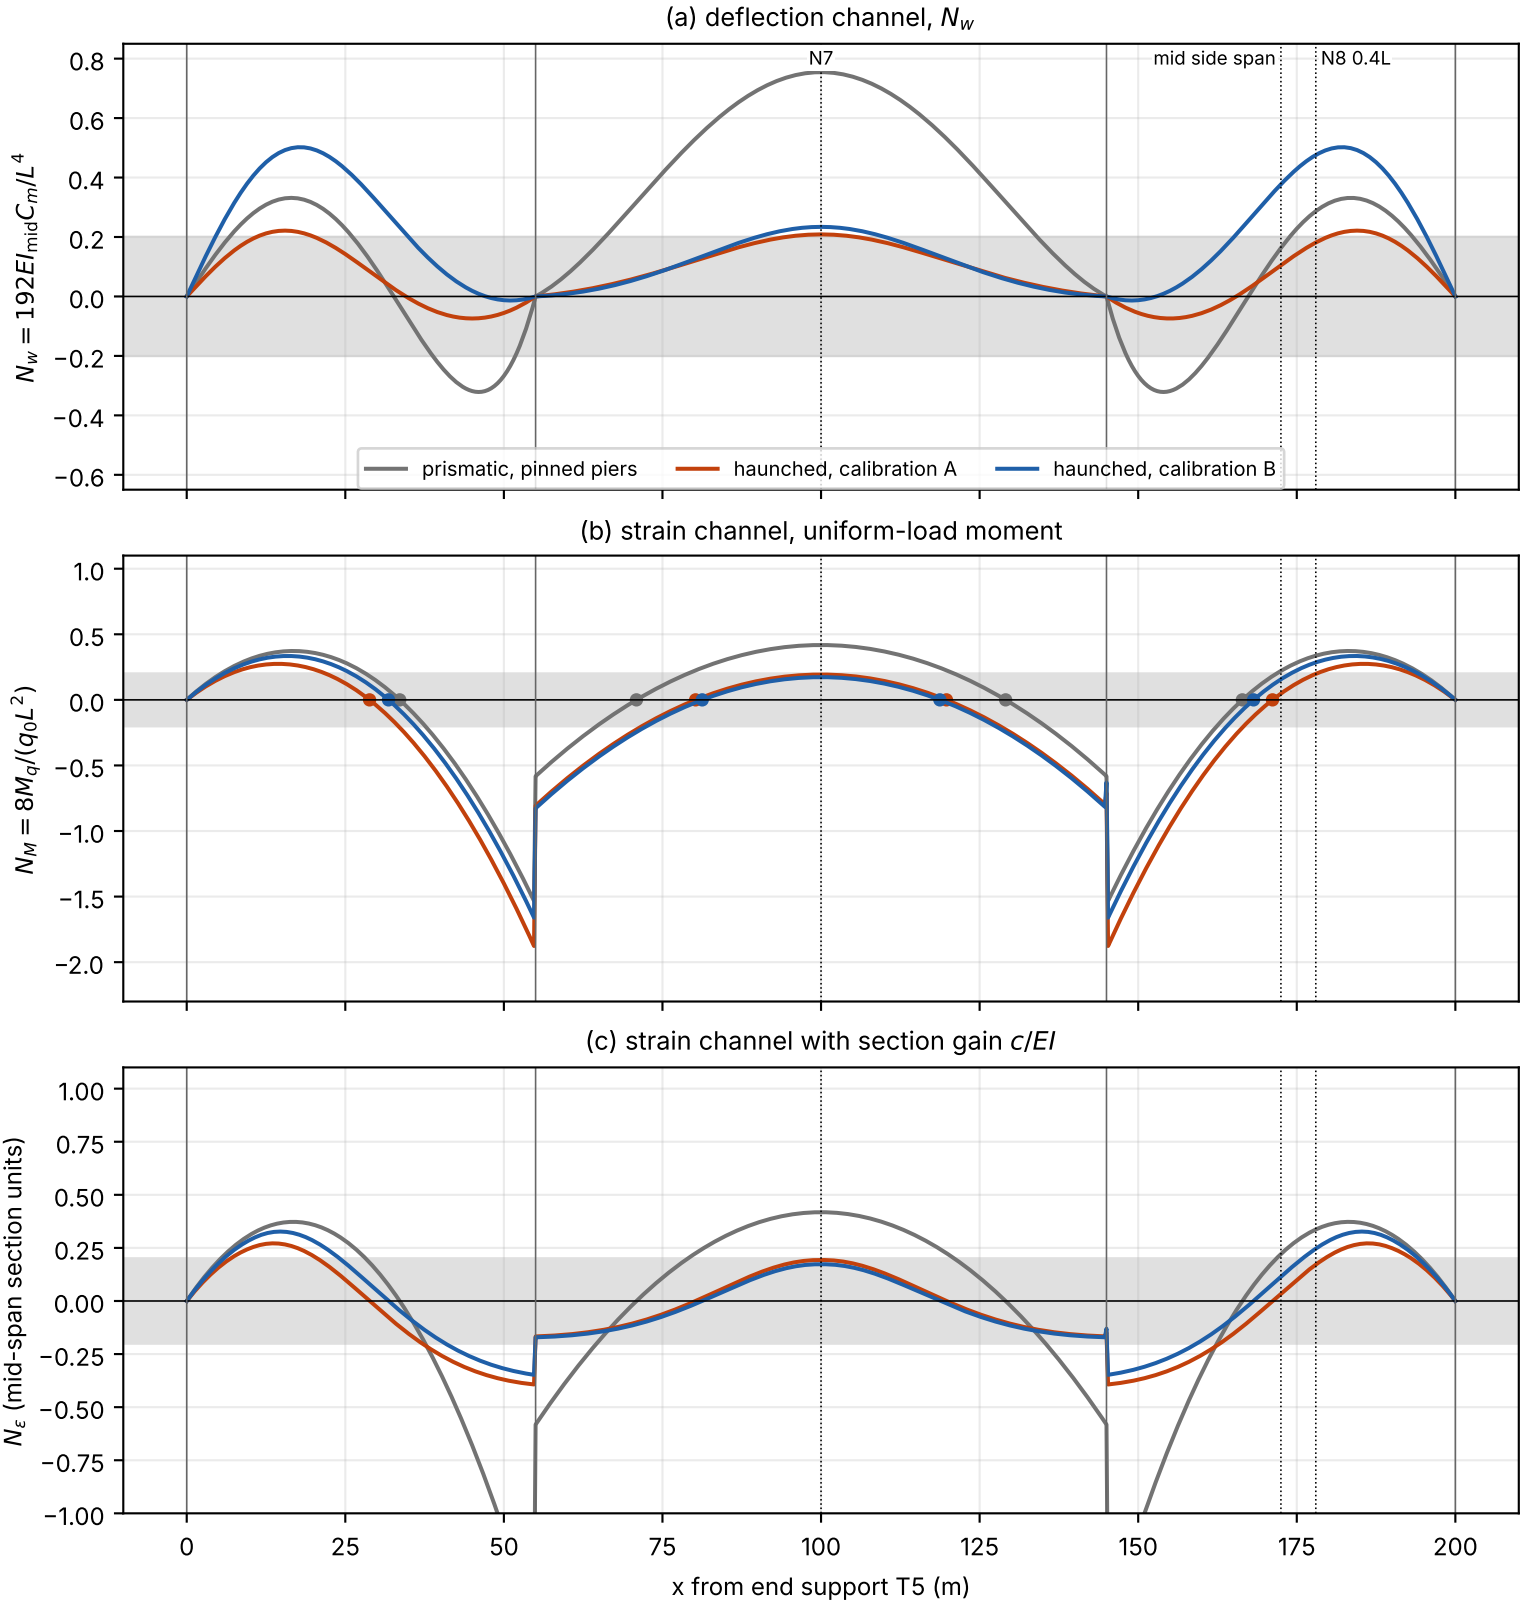
(a) deflection channel, N_w
$N_w = 192EI_{mid}C_m/L^4$
N7
mid side span
N8 0.4L
prismatic, pinned piers
haunched, calibration A
haunched, calibration B
(b) strain channel, uniform-load moment
$N_M = 8M_q/(q_0L^2)$
(c) strain channel with section gain c/EI
N_ε (mid-span section units)
x from end support T5 (m)