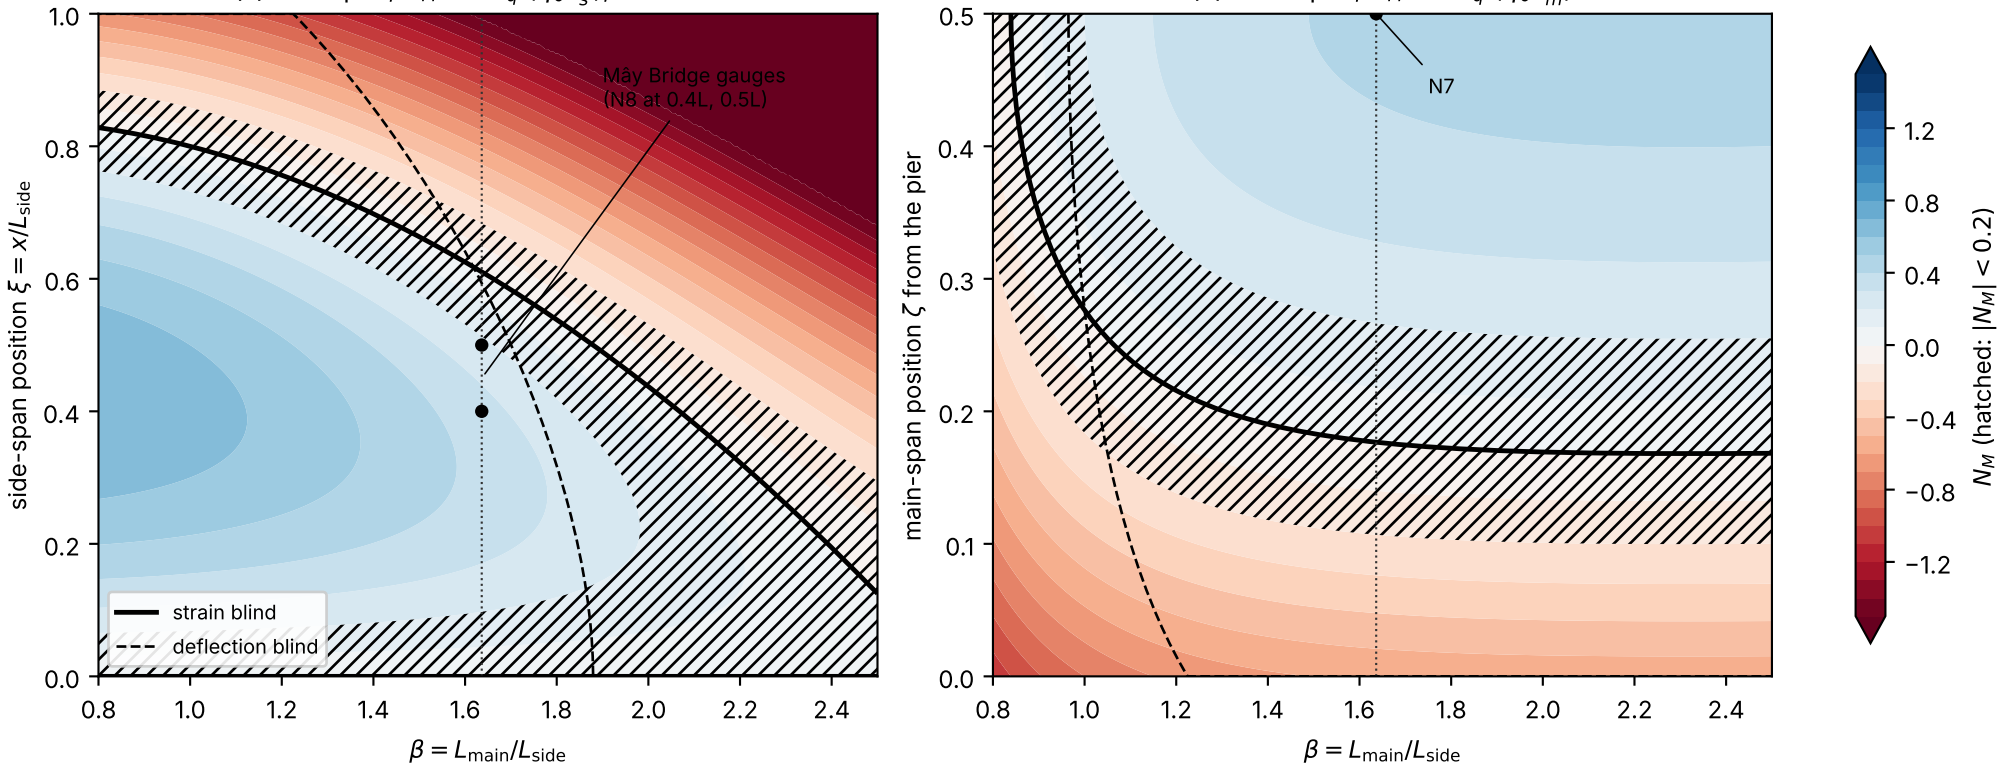

(a) side span, $N_M = 8M_q/(q_0 L_s^2)$, uniform $EI$
Mây Bridge gauges
(N8 at 0.4L, 0.5L)
strain blind
deflection blind
side-span position $\xi = x/L_{side}$
$\beta = L_{main}/L_{side}$
(b) main span, $N_M = 8M_q/(q_0 L_m^2)$
N7
main-span position $\zeta$ from the pier
$\beta = L_{main}/L_{side}$
$N_M$ (hatched: $|N_M| < 0.2$)