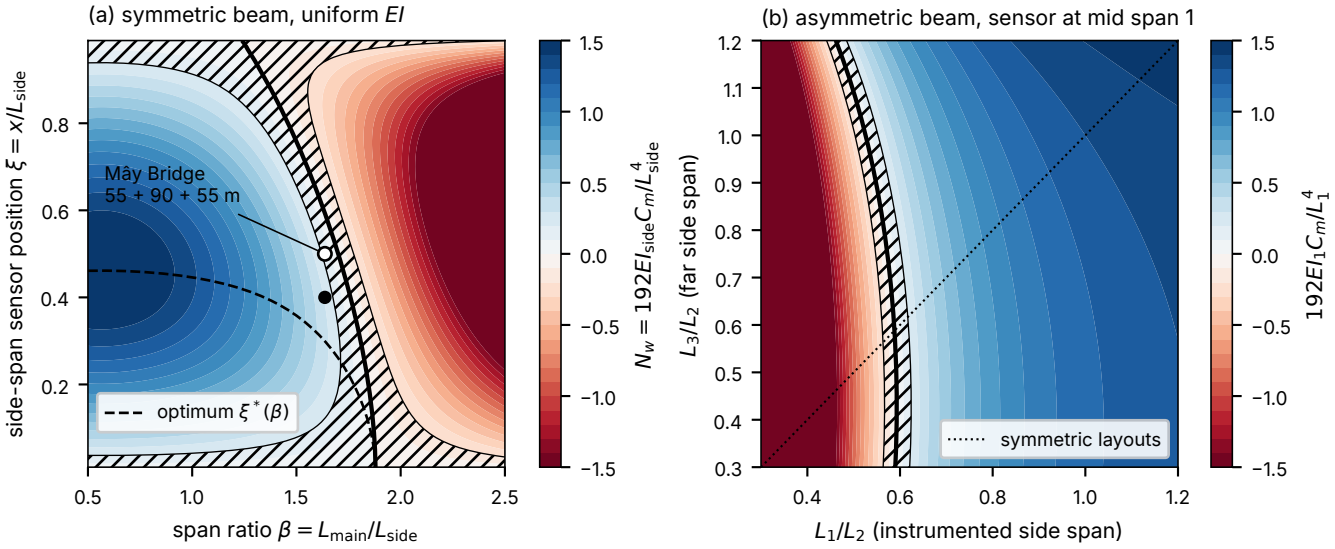

(a) symmetric beam, uniform EI
Mây Bridge
55 + 90 + 55 m
optimum ξ*(β)
side-span sensor position ξ = x/L_side
span ratio β = L_main/L_side
N_w = 192EI_side C_m/L_side^4
(b) asymmetric beam, sensor at mid span 1
symmetric layouts
L3/L2 (far side span)
L1/L2 (instrumented side span)
192EI_1 C_m/L_1^4