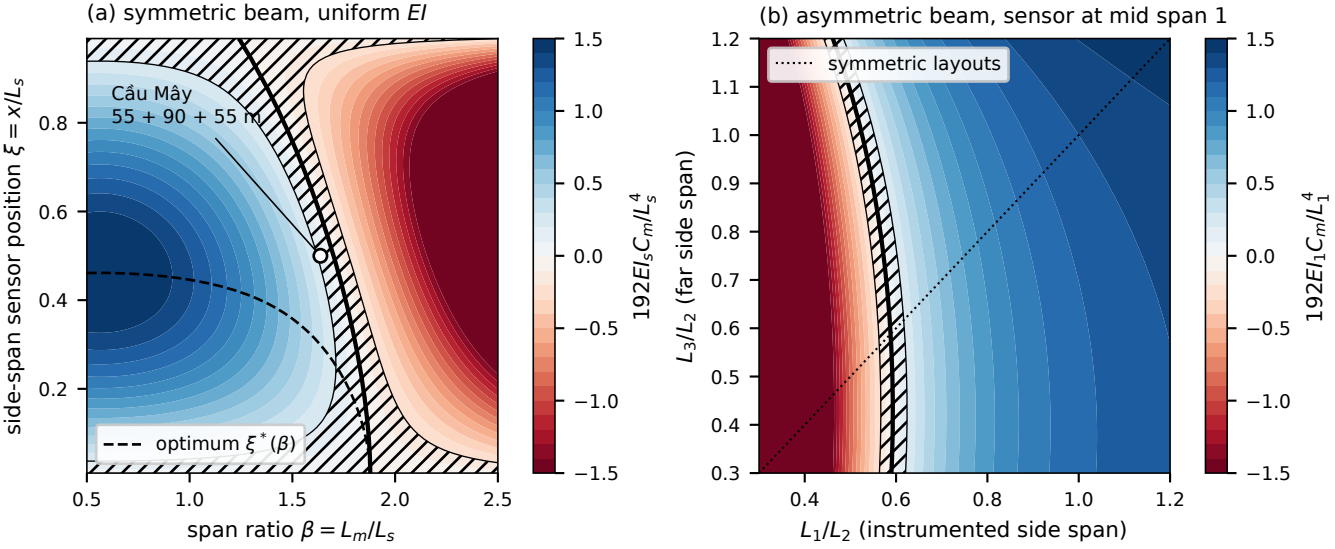

(a) symmetric beam, uniform EI
Cầu Mây
55 + 90 + 55 m
optimum $\xi^*(\beta)$
side-span sensor position $\xi = x/L_s$
span ratio $\beta = L_m/L_s$
$192EI_sC_m/L_s^4$
(b) asymmetric beam, sensor at mid span 1
symmetric layouts
L_3/L_2 (far side span)
L_1/L_2 (instrumented side span)
$192EI_1C_m/L_1^4$