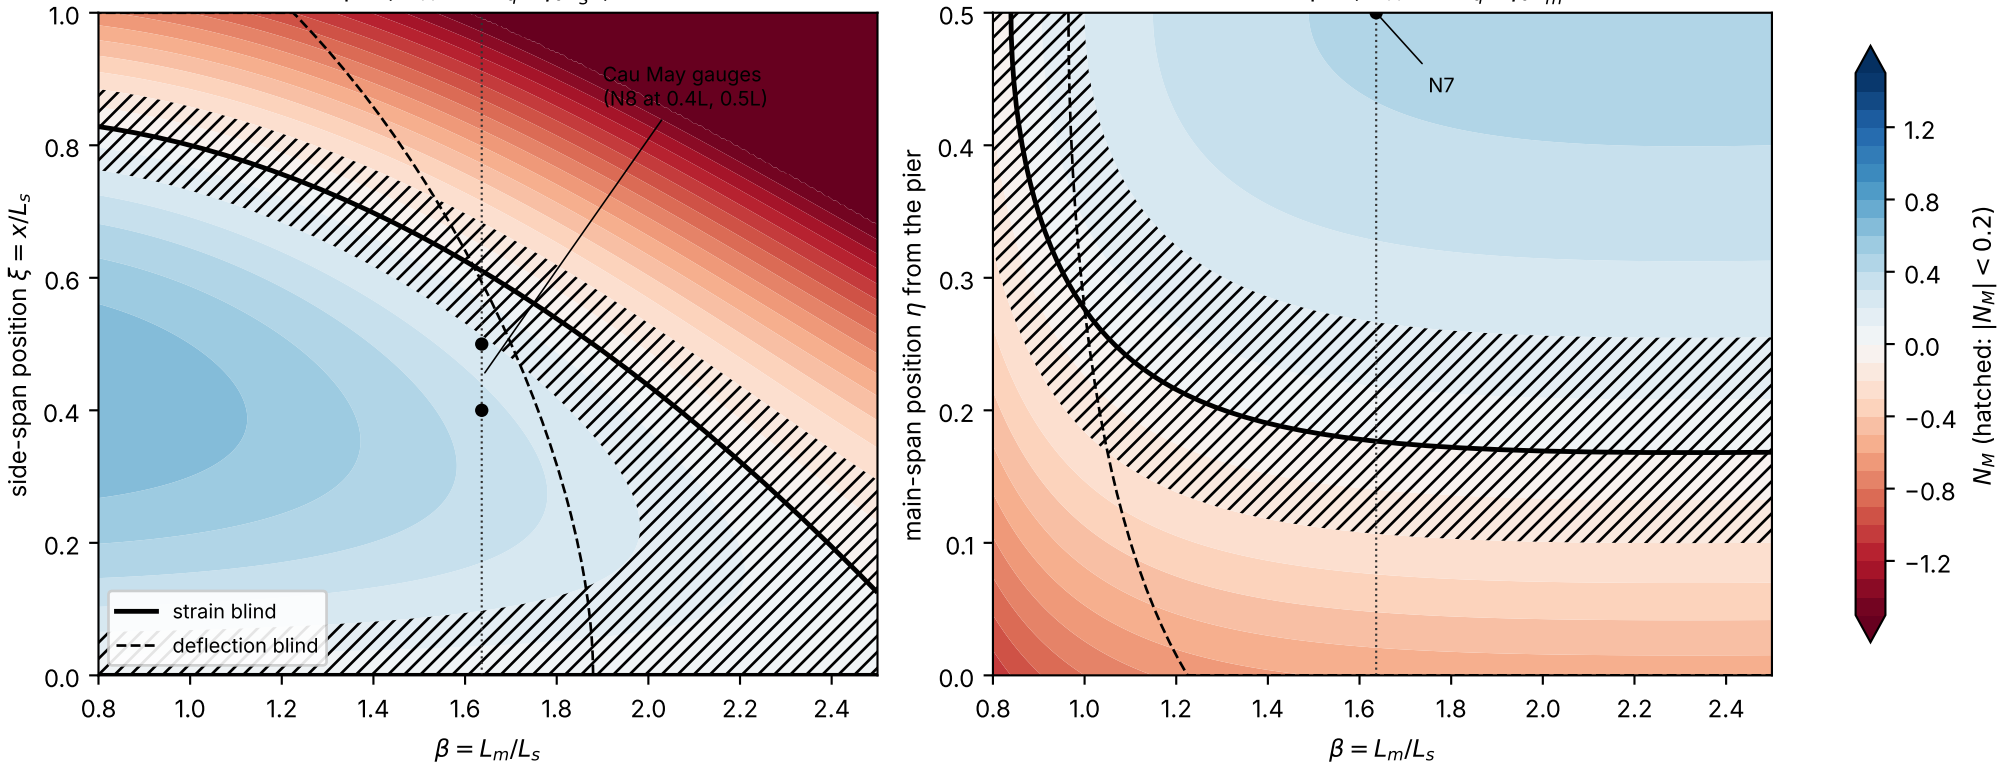

(a) side span, $N_M = 8M_q/(q_0 L_s^2)$, uniform $EI$
(b) main span, $N_M = 8M_q/(q_0 L_m^2)$
Cau May gauges
(N8 at 0.4L, 0.5L)
N7
strain blind
deflection blind
side-span position $\xi = x/L_s$
main-span position $\eta$ from the pier
$\beta = L_m/L_s$
$N_M$ (hatched: $|N_M| < 0.2$)
1.2
0.8
0.4
0.0
−0.4
−0.8
−1.2