


Car Jump Starter

-User Manual-

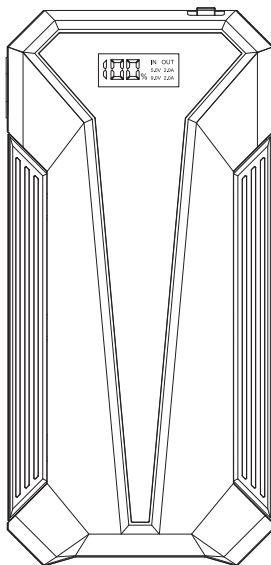

Model: **CY-A20** **EN**

What's in the box

- jump starter x1
- Normal Cable x1
- High quality type-C charging cable x1
- User-friendly manual x1


Specifications

Model number	CY-A20
Capacity	29.6Wh
EC5 output	12V 1500A
USB output	5V/1A,5V/2A(max 3A)
Type-C input	5V/2A,9V/2A
Charging time	1.5-3h
LED light power	White: 1W
Working temperature	-20°C ~+60°C / -4°F ~+140°F


Product diagrams

EC5 Jump start Output

LED display

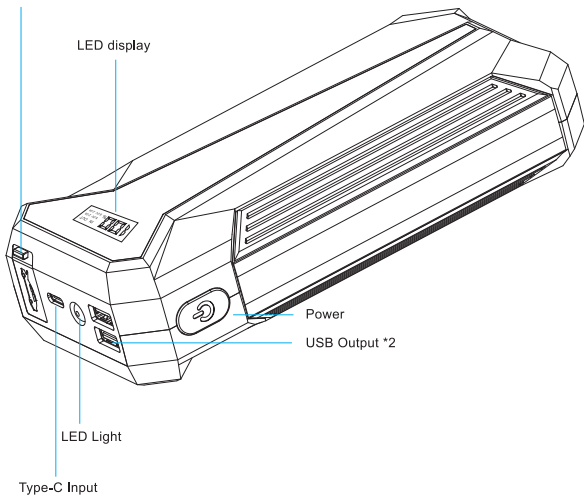

Accessories



Normal Cable




High quality type-C
charging cable

Charge the Jump Starter battery

Charging with an AC adapter

1. Connect the battery input with Type-C cable.
2. Connect the Type-C cable to AC adapter.
3. Plug the AC adapter into a power source.

Charge by Type-C

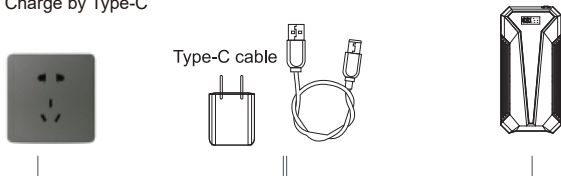

• Charge by Car



LED Display

Press the power button, the LED display shows as follows:




• Show available battery

How to Jump Start Your Vehicle



This unit is designed for jump starting 12V car batteries only and rated for gasoline engines up to 6 liters and diesel engines up to 3 liters. Do not attempt to jump start vehicles with a higher battery rating, or different voltage. If the vehicle isn't started immediately, please wait for 1 minute to allow device to cool down. Do not try to restart the vehicle after three consecutive attempts as this may damage the unit. Check your vehicle for other possible reasons why it can't be restarted.


Operating instructions




First step:
Plug the jumper cable clamp into the battery pack. The "↻" symbol circulate instructions from left to right.



Second step:
Connecting the jumper clamps to the car battery. (Red is positive and Black is negative). When working normally, display the voltage of the current jump starter.



Third step:
Start the car by turning on the ignition key.




Fourth step:
After the car has been started, remove the red and black clamps from the car battery and then remove the plug from the battery pack.

How to charge a mobile phone or digital products?



With powerful capacity and USB (5V/2A), it can full charge your smart phones and tablets up to 75% faster than a standard charger.

Operating instructions





Press the power button-->connect the phone and power bank output port-->charging

LED flashlight



Short press the Light Button to turn on the flashlight. The battery capacity indicator lights up. Short press the light button again to scroll through the lighting, Strobe, SOS. Short press again to turn off the flashlight. The flashlight offers more than 24 hours of continuous use when fully charged.

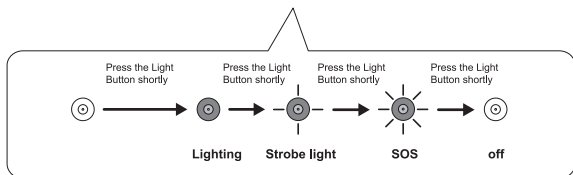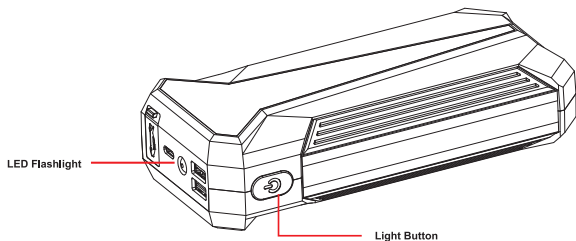



Safety Warning

1. Never short circuit the jump starter by connecting the Red and Black clamps.
2. Do not disassemble the jump starter.
3. If you find swelling, leakage or odor, please stop using the jump starter immediately.
4. Please use this starter at normal temperature and keep away from humid, hot and fire places.
5. Do not start the vehicle continuously. There should be at least 30 seconds to 1 minute between two starts.
6. When the battery power is less than 10%, do not use the jump starter otherwise the device will be damaged.
7. Before first use please charge it for 3 hours or more.
8. If the positive clamp of the starting power was incorrectly connected to the negative poles of the car battery, the product comes with relevant protective measures to avoid personal injury and property damage.

Note:

- For the first use, please make sure to fully charge before use.
- In normal use, please confirm that the unit has at least 50% power before use.

FCC warning:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation