Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色:黑色.

Housing:PA6T+30%G.F UL94V-0,Color:Black

端子: 磷/青铜, 镍底30u"MIN,表面镀金1u"MIN

Contact:Phosphor bronze,1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 2 AMP

Raring Current:2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围: -40℃ to+105℃

Temperture Range: -40℃ to+105℃

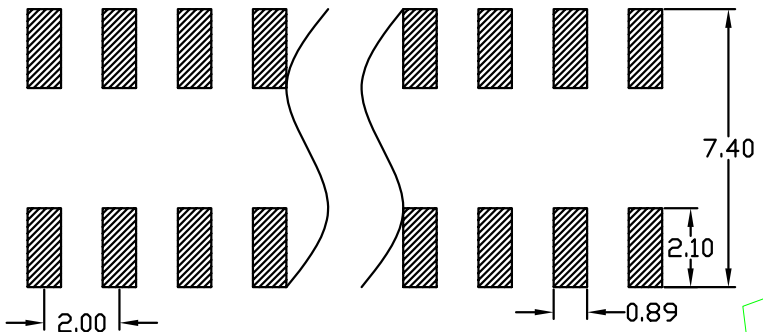

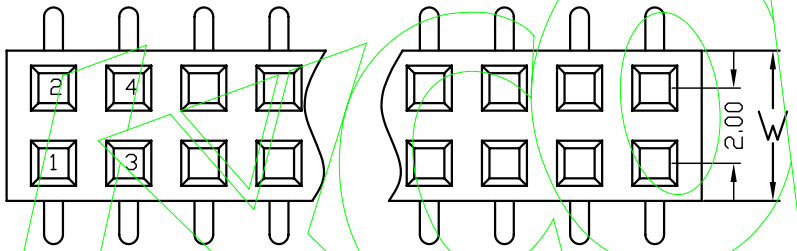

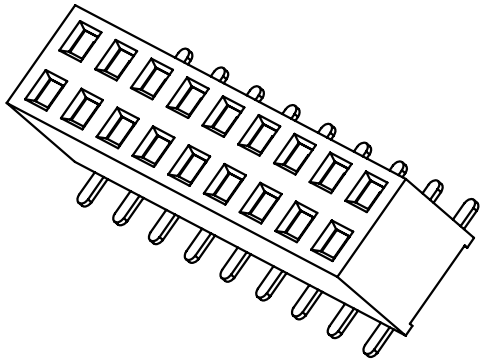

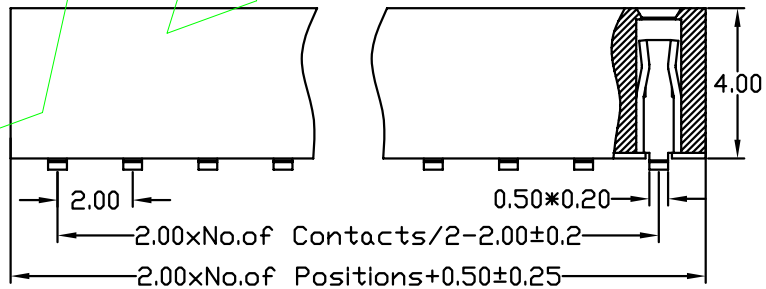



Ordering Information

F240-12 XX XX X MU X 1

NO.OF PINS PER ROW: 2~40P

Contact Plating

Full Of Gold	Semi-gold
A0=0.8u"	B0=0.8U"
A1=1u"	B1=1U"
A2=1.5u"	B2=1.5U"
A3=2u"	B3=2U"
A4=3u"	B4=3U"
A5=5u"	B5=5U"
A6=10u"	B6=10U"
A7=15u"	B7=15U"
A8=20u"	B8=20U"
A9=30u"	B9=30U"

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

INSULATOR MATERIAL:
B:PA6T
C:PA9T
D:LCP

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

DIM"W"	4.0	4.5

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

OPERATION	
X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE	Fit		
UNIT	MM		
SIZE	A4	DESIGN	卢小强
SHEET	1/1	CHECK	
PROJ.		APPROVE	

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.

PART NO.	F240-12XXXXXMUX1
TITLE:	2.00mm 双排母 塑高4.0 SMT U型
Customer No.	

Yxcon