


HSRP Load Balancing

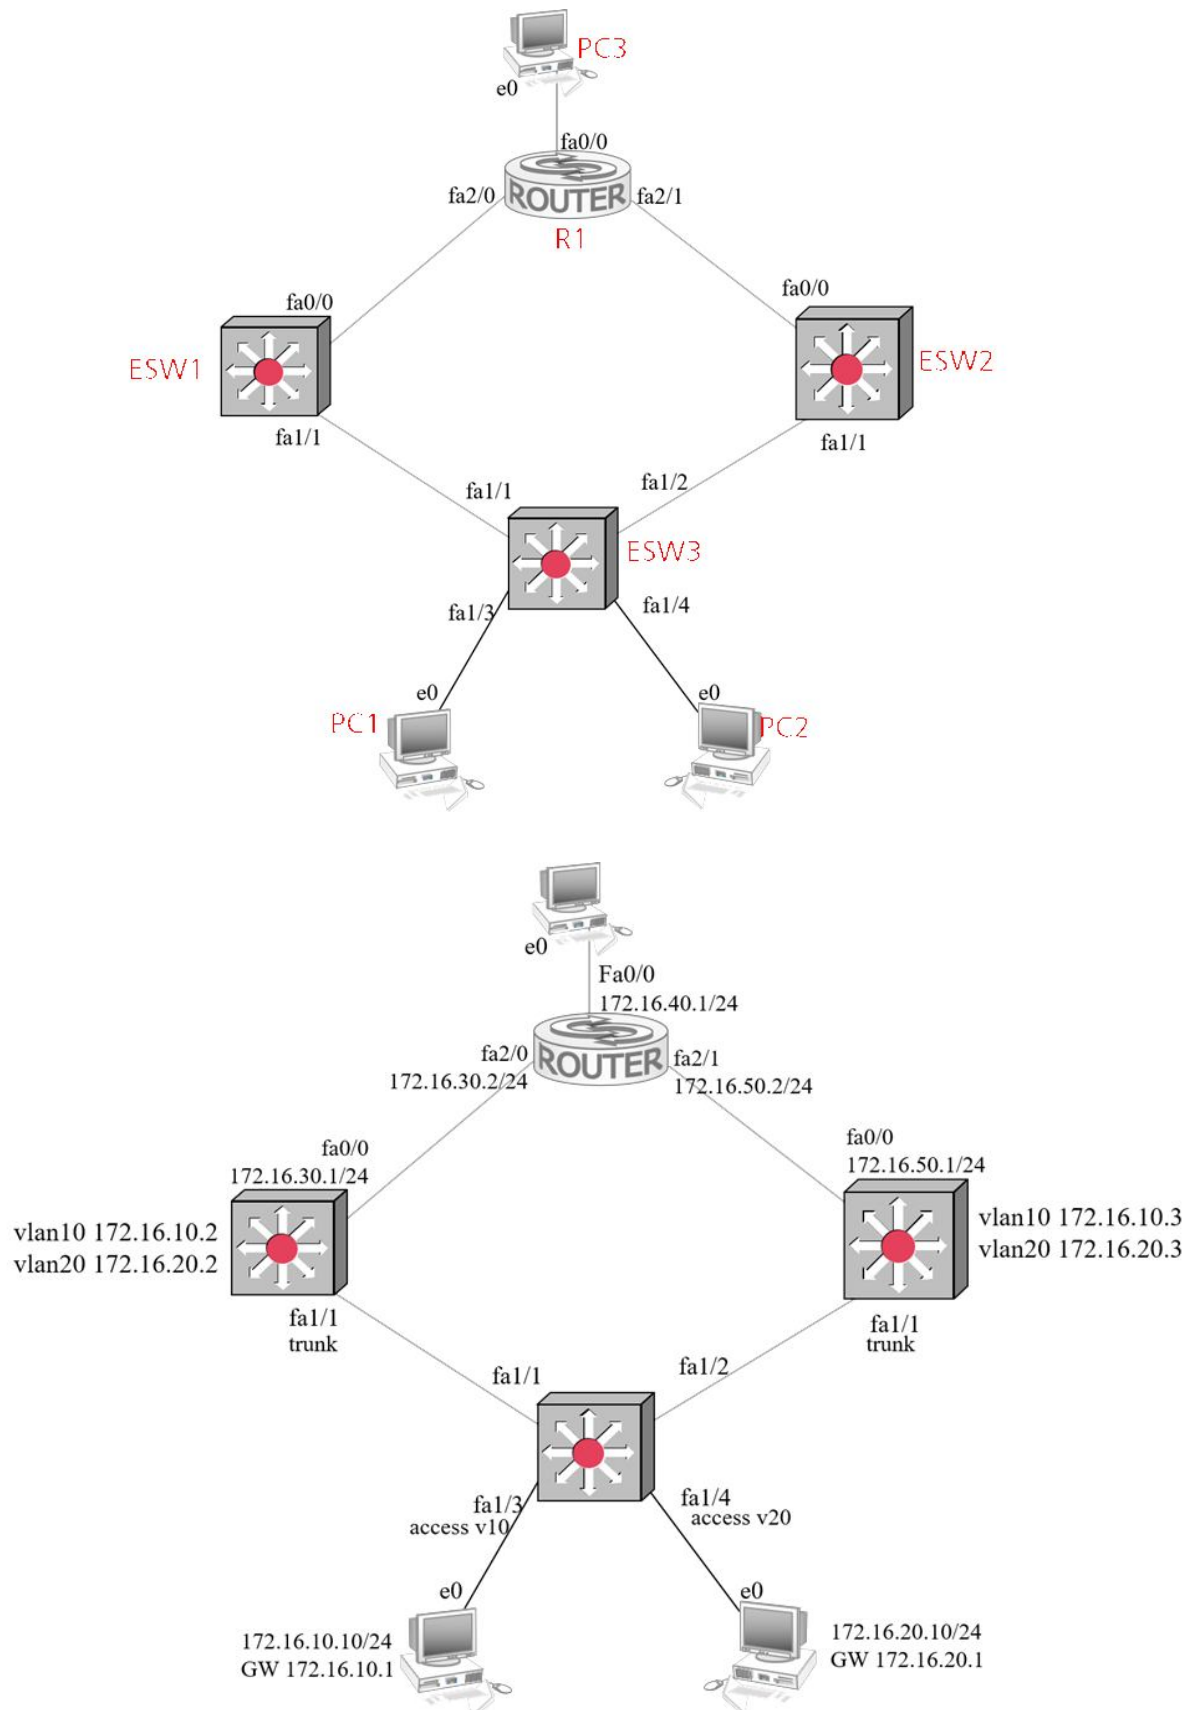

1) 인터페이스와 라우팅 설정

ESW1	ESW2
vlan database vlan 10 vlan 20 exit int vlan 10 ip add 172.16.10.2 255.255.255.0 int vlan 20 ip add 172.16.20.2 255.255.255.0 int fa1/1 switchpot mode trunk int fa0/0 ip add 172.16.30.1 255.255.255.0 no shutdown	vlan database vlan 10 vlan 20 exit int vlan 10 ip add 172.16.10.3 255.255.255.0 int vlan 20 ip add 172.16.20.3 255.255.255.0 int fa1/1 switchpot mode trunk int fa0/0 ip add 172.16.50.1 255.255.255.0 no shutdown
router eigrp 100 net 172.16.10.0 net 172.16.20.0 net 172.16.30.0	router eigrp 100 net 172.16.10.0 net 172.16.20.0 net 172.16.50.0


ESW3	R1
vlan database vlan 10 vlan 20 exit conf t int fa1/1 switch mode trunk int fa1/2 switch mode trunk int fl/3 switch mode access switch access vlan 10 int fa1/4 switch mode access switch access vlan 20 end	conf t int fa0/0 ip add 172.16.40.1 255.255.255.0 no shutdown int fa2/0 ip add 172.16.30.2 255.255.255.0 no shutdown int fa2/1 ip add 172.16.50.2 255.255.255.0 no shutdown end
[확인명령어] show vlan-switch brief show int trunk	router eigrp 100 net 172.16.30.0 net 172.16.40.0 net 172.16.50.0

2) PC 네트워크 설정

PC1	ip 172.16.10.10 255.255.255.0 172.16.10.1 save
PC2	ip 172.16.20.10 255.255.255.0 172.16.20.1 Save
PC3	ip 172.16.40.10 255.255.255.0 172.16.40.1 save

[IP 설정 확인 명령어] show ip

3) HSRP 설정

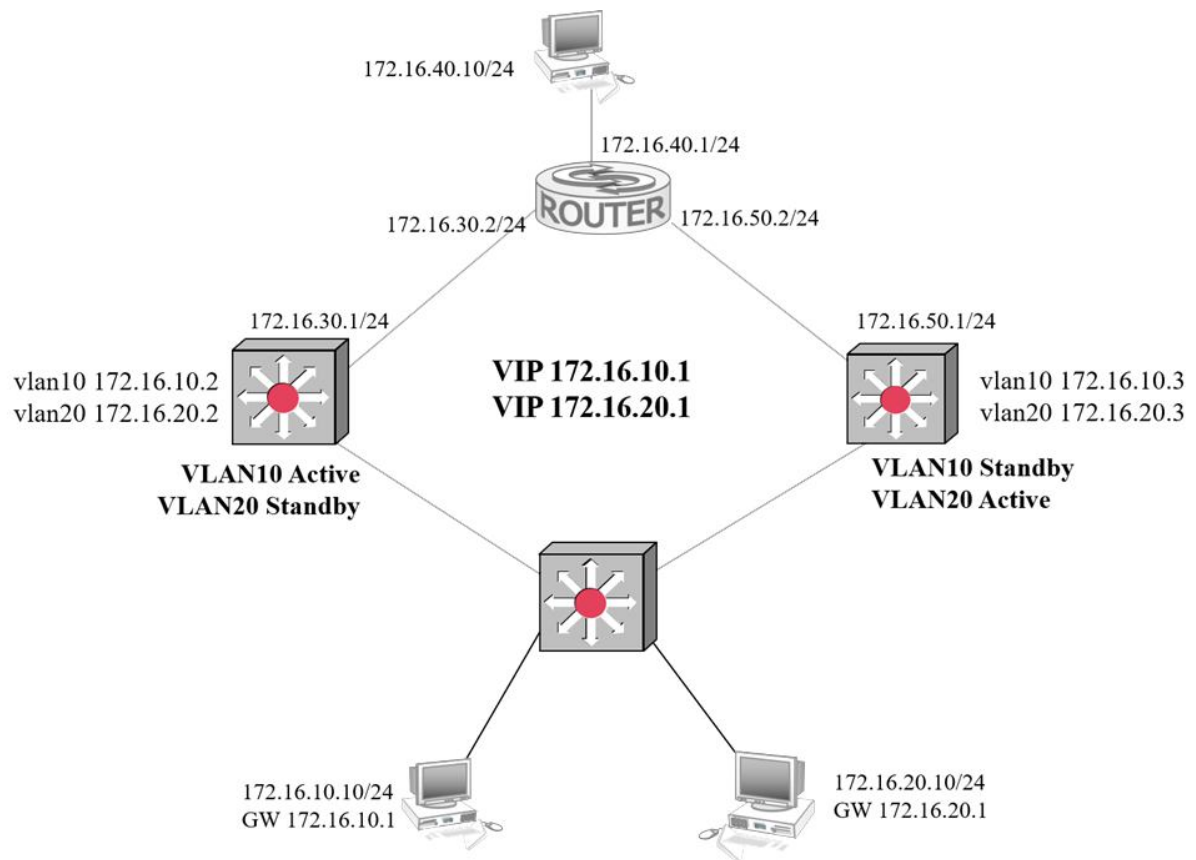

ESW1	ESW2
<pre>(config)#int vlan 10 (config-int)#standby 1 ip 172.16.10.1 (config-int)#standby 1 priority 150 (config-int)#standby 1 preempt (config-int)#int vlan 20 (config-int)#standby 2 ip 172.16.20.1 (config-int)#standby 2 priority 50 (config-int)#end</pre>	<pre>(config)#int vlan 10 (config-int)#standby 1 ip 172.16.10.1 (config-int)# standby 1 priority 50 (config)#int vlan 20 (config-int)#standby 2 ip 172.16.20.1 (config-int)#standby 2 priority 150 (config-int)#standby 2 preempt (config-int)#end</pre>

[HSRP 확인 명령어] show standby brief