

Switch0

Physical Config CLI Attributes

IOS Command Line Interface

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 2
Switch(config-vlan)#
Switch(config-vlan)#int fa0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 2
Switch(config-if)#exit
Switch(config)#
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#192.168.0.1
Trying 192.168.0.1 ...
% Connection timed out; remote host not responding
Switch#show vlan
```

VLAN Name	Status	Ports
1 default	active	Fa0/1, Fa0/2, Fa0/4, Fa0/5 Fa0/6, Fa0/7, Fa0/8, Fa0/9 Fa0/10, Fa0/11, Fa0/12, Fa0/13 Fa0/14, Fa0/15, Fa0/16, Fa0/17 Fa0/18, Fa0/19, Fa0/20, Fa0/21 Fa0/22, Fa0/23, Fa0/24, Gig0/1 Gig0/2
2 VLAN0002	active	Fa0/3
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
2	enet	100002	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	-	0	0
1004	fdnet	101004	1500	-	-	-	ieee	-	0	0
1005	trnet	101005	1500	-	-	-	ibm	-	0	0

Copy Paste

Top

Switch1

Physical Config CLI Attributes

IOS Command Line Interface

```
Switch1(config)#vlan 2
Switch1(config-vlan)#int fa0/3
Switch1(config-if)#switchport mode access
Switch1(config-if)#switchport access vlan 2
Switch1(config-if)#exit
Switch1(config)#vlan 3
Switch1(config-vlan)#name buhg
Switch1(config-vlan)#int range fa0/3-4
Switch1(config-if-range)#
Switch1(config-if-range)#switchport mode access
Switch1(config-if-range)#switchport access vlan 3
Switch1(config-if-range)#exit
Switch1(config)#exit
Switch1#
%SYS-5-CONFIG_I: Configured from console by console

Switch1#show vlan
```


VLAN Name	Status	Ports
1 default	active	Fa0/1, Fa0/2, Fa0/5, Fa0/6 Fa0/7, Fa0/8, Fa0/9, Fa0/10 Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15, Fa0/16, Fa0/17, Fa0/18 Fa0/19, Fa0/20, Fa0/21, Fa0/22 Fa0/23, Fa0/24, Gig0/1, Gig0/2
2 VLAN0002	active	
3 buhg	active	Fa0/3, Fa0/4
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
2	enet	100002	1500	-	-	-	-	-	0	0
3	enet	100003	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0

--More--

Copy Paste

Top

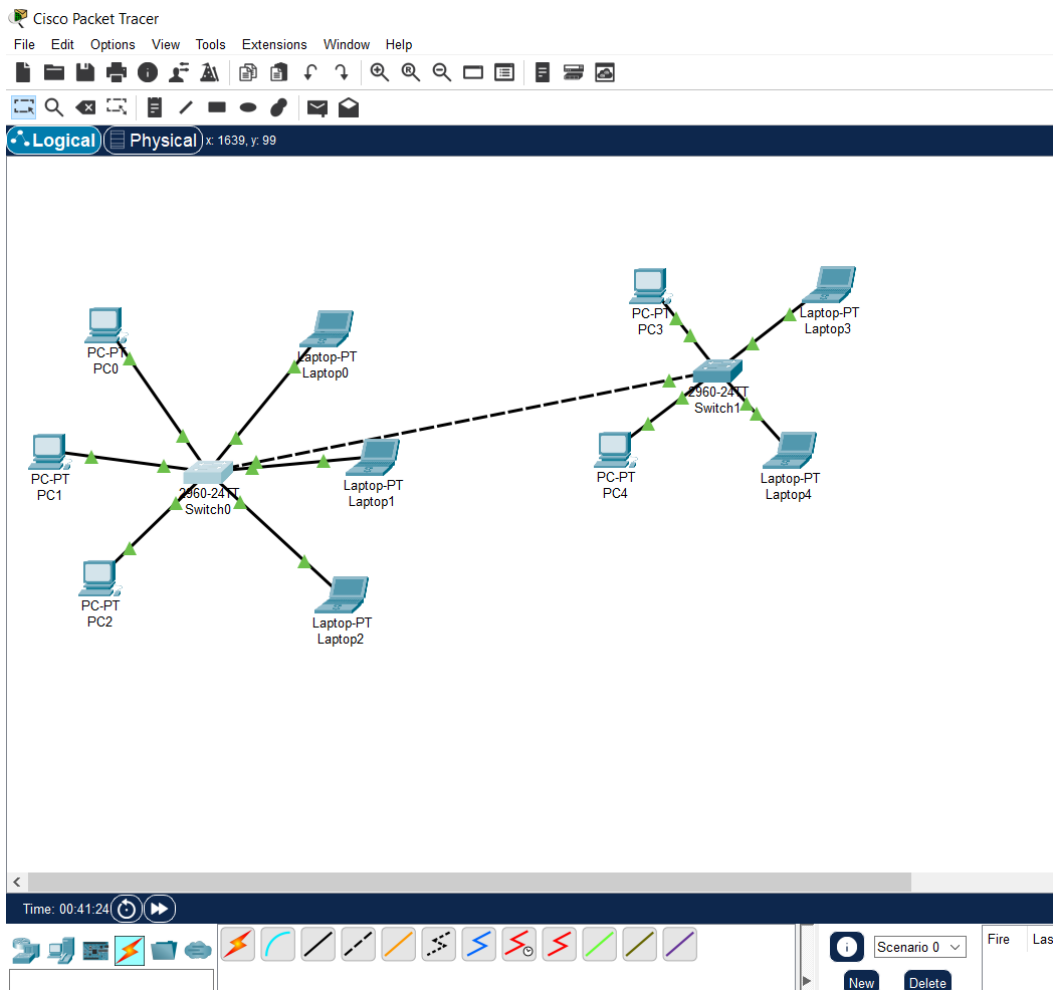

Switch0

Physical Config CLI Attributes

IOS Command Line Interface

```
% Incomplete command.
Switch(config-if)#switchport trunk allowed 2,3
^
% Invalid input detected at '^' marker.

Switch(config-if)#switchport trunk allowed vlan 2,3
Switch(config-if)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#show vlan
```

VLAN Name	Status	Ports
1 default	active	Fa0/1, Fa0/2, Fa0/4, Fa0/5 Fa0/6, Fa0/7, Fa0/8, Fa0/9 Fa0/10, Fa0/11, Fa0/12, Fa0/13 Fa0/14, Fa0/15, Fa0/16, Fa0/17 Fa0/18, Fa0/19, Fa0/20, Fa0/21 Fa0/22, Fa0/23, Fa0/24, Gig0/2
2 VLAN0002	active	Fa0/3
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

VLAN Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1 enet	100001	1500	-	-	-	-	-	0	0
2 enet	100002	1500	-	-	-	-	-	0	0
1002 fddi	101002	1500	-	-	-	-	-	0	0
1003 tr	101003	1500	-	-	-	-	-	0	0
1004 fdnet	101004	1500	-	-	-	ieee	-	0	0

--More--

Copy Paste

Time: 00:40:59

Top

