

1

2

3


4


ESLS- EPITOME Single Acting Spring Return Low height Jack Spherical saddle 5 Capacity-ton 8 Stroke-mm

A

B

C



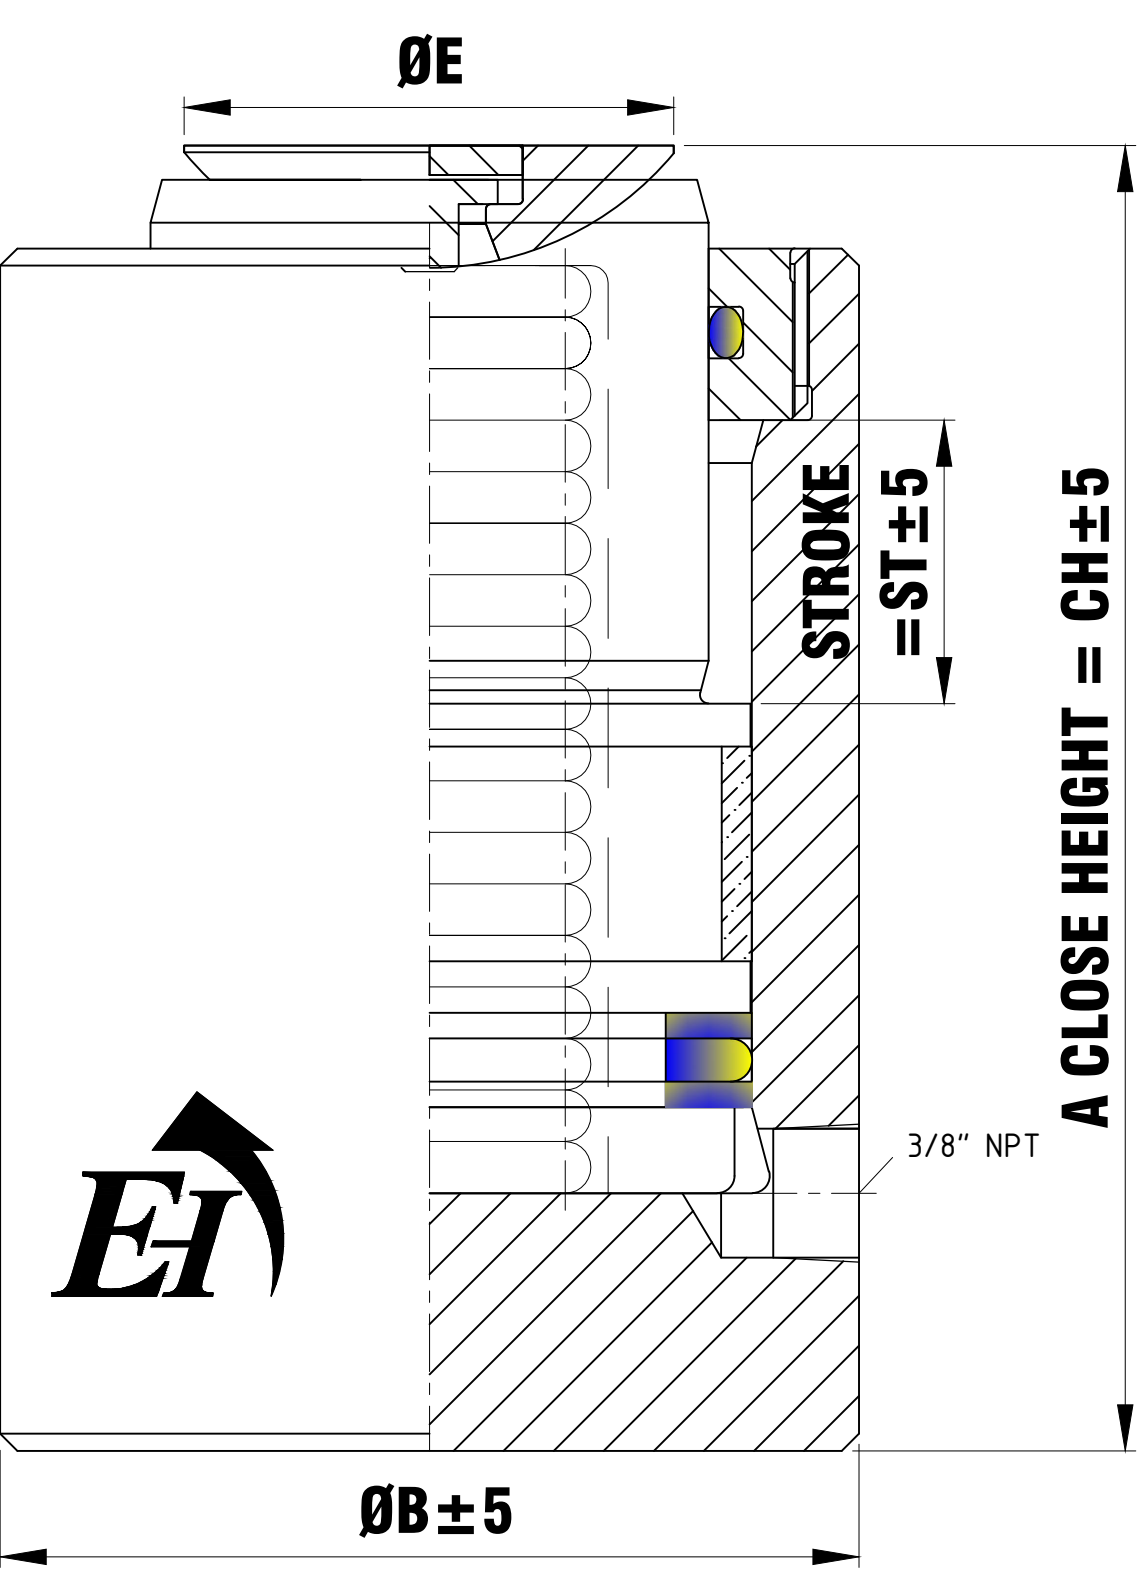

D


E

F

ESLS SERIES- E EPITOME S SINGLE ACTING SPRING RETURN L LOW HEIGHT JACK S SPHERICAL SADDLE (TILTING ANGLE 5°MAX) 10 CAPACITY -TON 30 STROKE -MM

RATED CAPACITY (TON)	CAPACITY @700 BAR (KN)	STROKE (MM)	MODEL	EFFECTIVE AREA (CM <sup>2</sup> )	OIL CAP (CC)	A CLOSED HEIGHT (MM)	B CYLIINDER OD (MM)	C BORE DIA (MM)	D RAMDIA (MM)	E SADDLE DIA (MM)	WT (APPROX)(KG)
10	111	30	OSLS 10-30	15.9	48	110	70	45	35	35	2.5
20	218	50	OSLS 20-50	31.2	160	140	90	63	50	48	5.3
30	309	50	OSLS 30-50	44.2	221	145	100	75	60	55	6.5
50	550	60	OSLS 50-60	78.5	471	145	130	100	80	74	11.7
75	792	60	OSLS 75-60	113.1	679	170	155	120	95	88	19.8
100	1077	60	OSLS 100-60	153.9	925	175	180	140	110	100	25.2
150	1589	60	OSLS 150-60	227.0	1362	200	220	170	140	130	47
200	2199	60	OSLS 200-60	314.2	1885	235	255	200	160	150	71

ANGLE OF PROJECTION

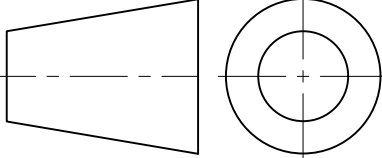


DO NOT SCALE DRAWING

CHK'D

DESCRIPTION

REVISION



NAME

SIGNATURE

DATE

DRAWN

PRADEEP

22.02.2022

CHK'D

PATIL


22.02.2022

APPV'D

P.B.PATIL

22.02.2022

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN MILLIMETERS  
SURFACE FINISH:  
TOLERANCES:  
LINEAR:  
ANGULAR:



EPITOME


UDYAMBAG-BELAGAVI  
KARANATAKA-INDIA  
sudhir.epitome@gmail.com.

DRAWING NO.

ESLS-SERIES

MATERIAL:

WEIGHT:

 EPITOME

7

sudhir.epitome@gmail.com