



ESP- EPITOME Single Acting Spring Return Plain Ram 5 Capacity-ton 50 Stroke-mm

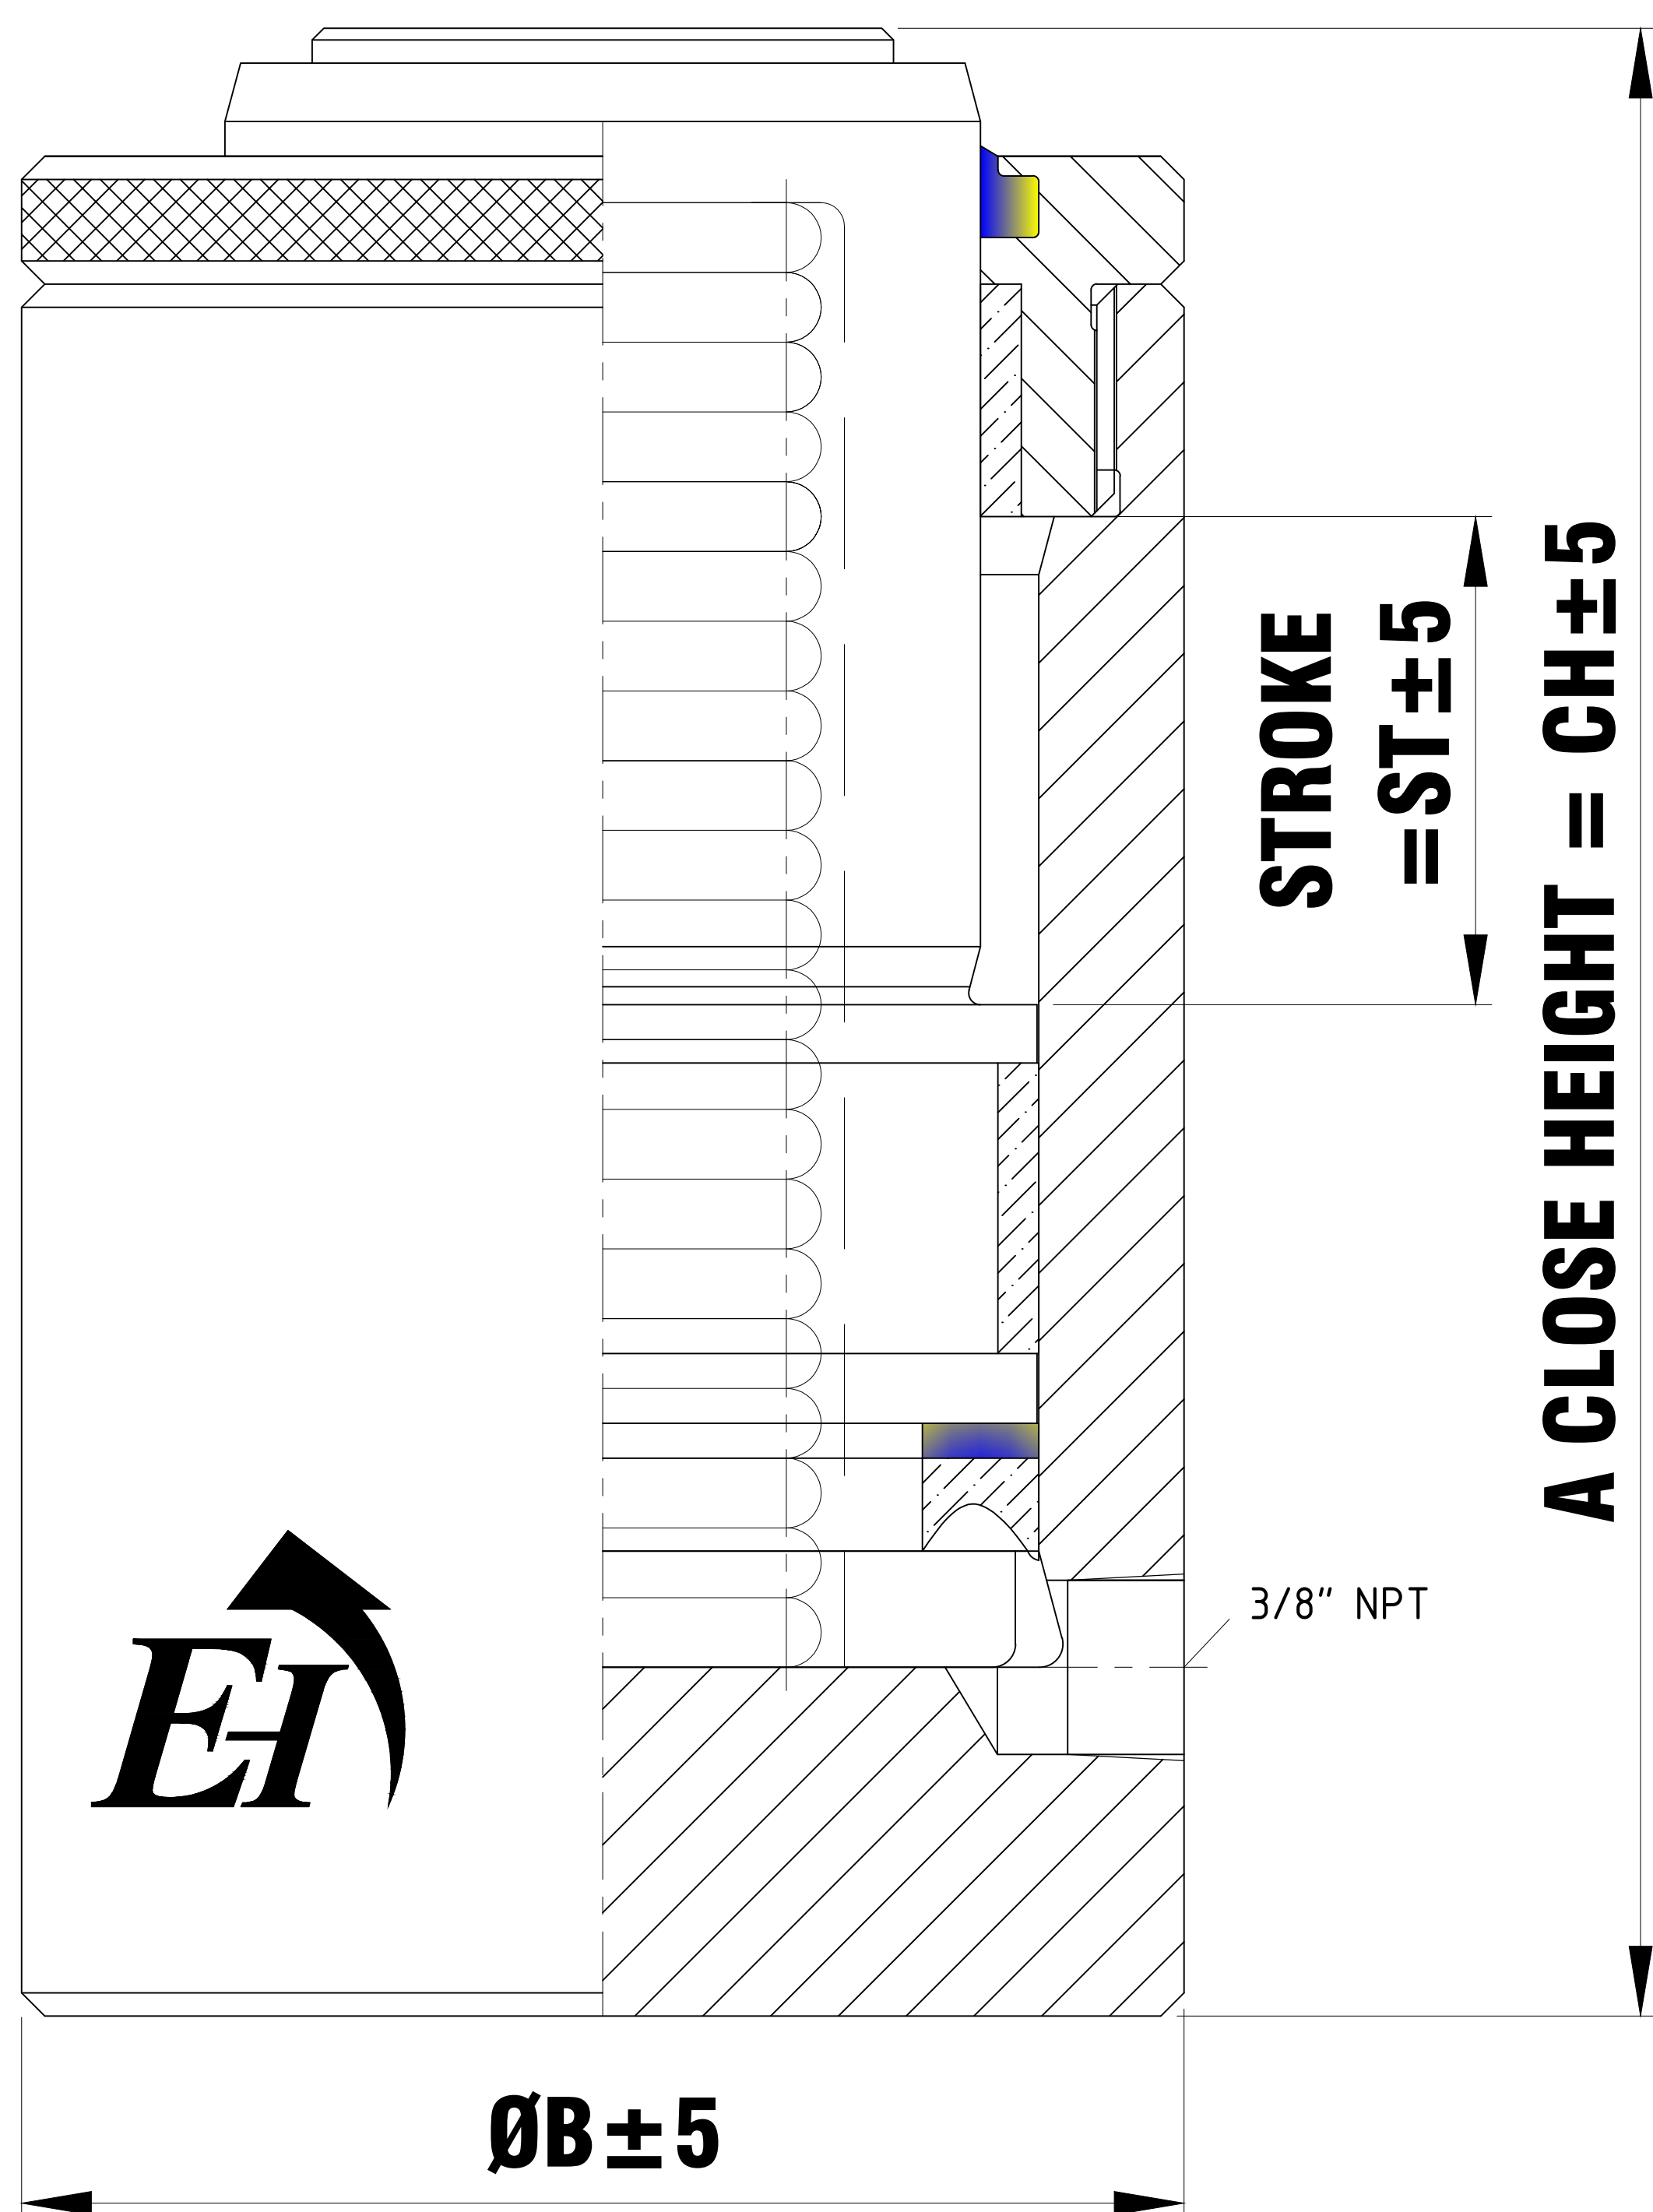

RATED CAPACITY (TON)	CAPACITY @700 BAR (KN)	STROKE (MM)	MODEL	EFFECTIVE AREA (CM ²)	OIL CAP (CC)	A CLOSED HEIGHT (MM)	B CYLINDER OD (MM)	C BORE DIA (MM)	D RAM DIA (MM)	E SADDLE DIA (MM)	WT (APPROX) (KG)
50	550	50	OSP 50-50	78.5	393	175	130	100	80	78	16.5
50	550	100	OSP 50-100	78.5	785	225	130	100	80	78	20.5
50	550	150	OSP 50-150	78.5	1178	275	130	100	80	78	24.5
50	550	200	OSP 50-200	78.5	1571	325	130	100	80	78	28.5
75	792	50	OSP 75-50	113.1	565	180	155	120	95	93	24
75	792	100	OSP 75-100	113.1	1131	230	155	120	95	93	29.5
75	792	150	OSP 75-150	113.1	1696	280	155	120	95	93	35
75	792	200	OSP 75-200	113.1	2262	330	155	120	95	93	41
100	1077	50	OSP 100-50	153.9	770	185	180	140	110	108	33
100	1077	100	OSP 100-100	153.9	1539	235	180	140	110	108	40.5
100	1077	150	OSP 100-150	153.9	2309	285	180	140	110	108	48
100	1077	200	OSP 100-200	153.9	3079	335	180	140	110	108	55.5
150	1589	50	OSP 150-50	227.0	1135	200	220	170	140	138	54
150	1589	100	OSP 150-100	227.0	2270	250	220	170	140	138	65.5
150	1589	150	OSP 150-150	227.0	3405	300	220	170	140	138	77
200	2199	50	OSP 200-50	314.2	1571	215	255	200	160	158	76
200	2199	100	OSP 200-100	314.2	3142	265	255	200	160	158	91
200	2199	150	OSP 200-150	314.2	4712	315	255	200	160	158	106.5
250	2661	100	OSP 250-100	380.1	3801	270	280	220	180	177	114
250	2661	150	OSP 250-150	380.1	5702	320	280	220	180	177	133
250	2661	200	OSP 250-200	380.1	7603	370	280	220	180	177	152
300	3167	100	OSP 300-100	452.4	4524	285	310	240	200	196	149
300	3167	150	OSP 300-150	452.4	6786	335	310	240	200	196	173
300	3167	200	OSP 300-200	452.4	9048	385	310	240	200	196	197
400	4008	100	OSP 400-100	572.6	5726	315	350	270	220	216	209
400	4008	150	OSP 400-150	572.6	8588	365	350	270	220	216	239
400	4008	200	OSP 400-200	572.6	11451	415	350	270	220	216	269

ANGLE OF PROJECTION

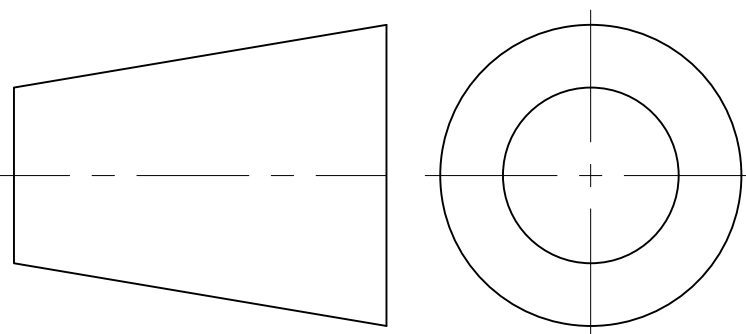

DO NOT SCALE DRAWING

CHK'D

DESCRIPTION

REVISION



NAME

SIGNATURE

DATE _____

DRAWN PRADEEP

22.02.2022

CHK'D	PATIL
-------	-------

22.02.2022

APPV'D P.B.PATIL

22.02.2022

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH

**SURFACE FINI
TOLERANCES:**

LINEAR:

ANGULAR:

The logo for EPITOME, featuring a stylized 'E' and 'I' with a curved arrow pointing upwards and to the right, followed by the word 'EPITOME' in a serif font.

UDYAMBAG-BELAGAVI
KARNATAKA-INDIA
sudhir.epitome@gmail.com.

DRAWING NO.

ESP-SERIES

MATERIAL:

WEIGHT:

SHEET 2 OF 2

EP *EPITOME*