

1

2

3


4


ELS- EPITOME Single Acting Spring Return Low height Jack 5 Capacity-ton 8 Stroke-mm

A

B

C



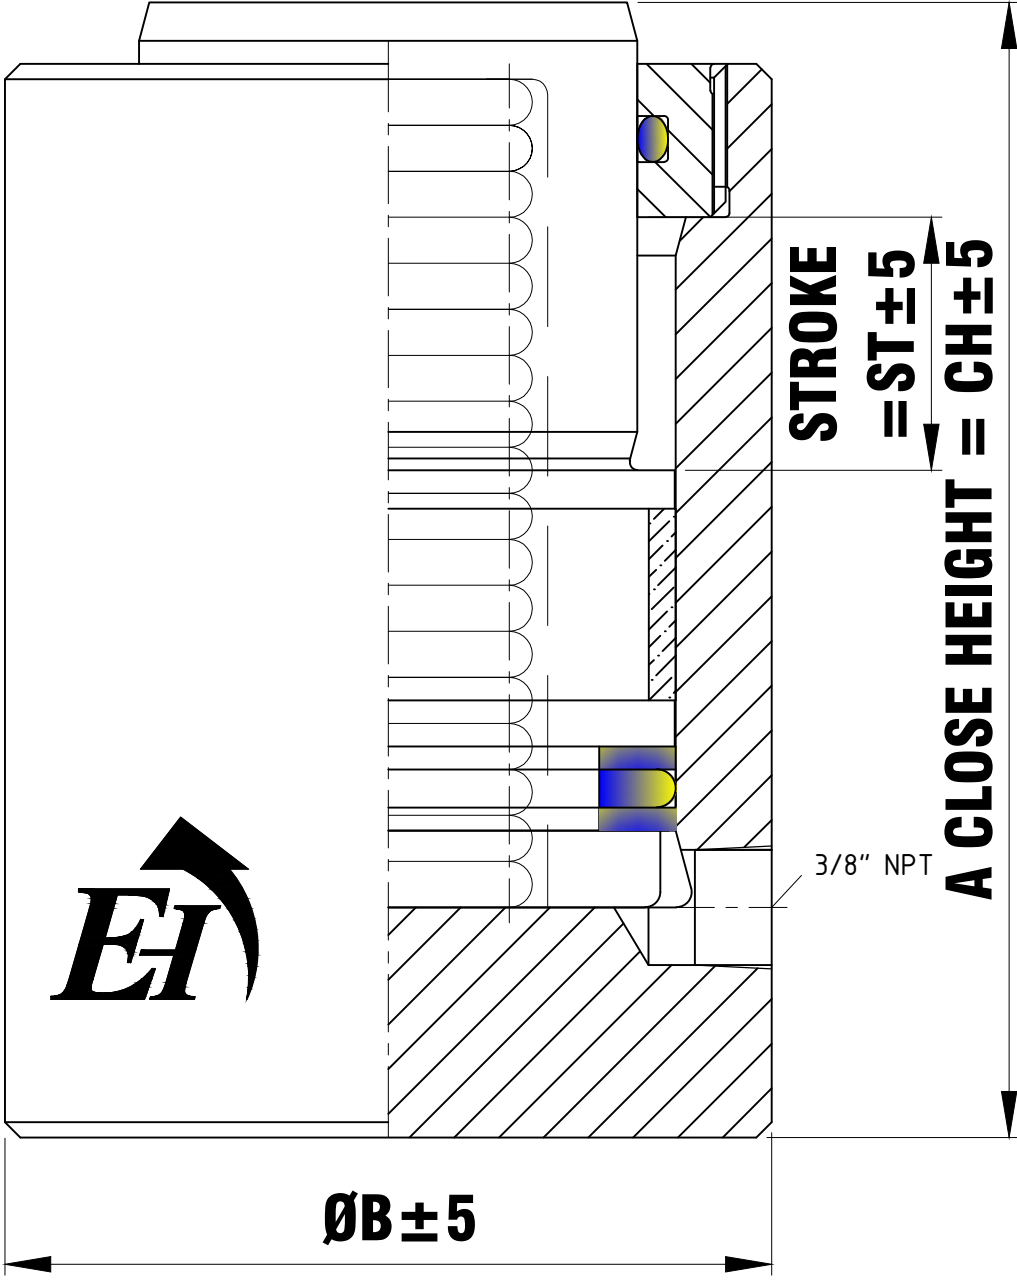


ESL SERIES- E EPITOME S SINGLE ACTING SPRING RETURN L LOW HEIGHT JACK 10 CAPACITY -TON 30 STROKE -MM

RATED CAPACITY (TON)	CAPACITY @700 BAR (KN)	STROKE (MM)	MODEL	EFFECTIVE AREA (CM ²)	OIL CAP (CC)	A CLOSED HEIGHT (MM)	B CYLINDER ROD (MM)	C BORE DIA (MM)	D RAM DIA (MM)	WT (APPROX)(KG)
10	111	30	ESL 10-30	15.9	48	90	70	45	35	2.3
20	218	50	ESL 20-50	31.2	160	115	90	63	50	4.9
30	309	50	ESL 30-50	44.2	221	120	100	75	60	6
50	550	60	ESL 50-60	78.5	471	125	130	100	80	11
75	792	60	ESL 75-60	113.1	679	145	155	120	95	18.4
100	1077	60	ESL 100-60	153.9	925	150	180	140	110	23.6
150	1589	60	ESL 150-60	227.0	1362	165	220	170	140	43
200	2199	60	ESL 200-60	314.2	1885	200	255	200	160	66

E

ANGLE OF PROJECTION

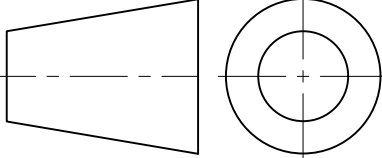


DO NOT SCALE DRAWING


CHK'D

DESCRIPTION


REVISION




NAME



PRADEEP



PATIL




P.B.PATIL

SIGNATURE

DATE

DATE

DATE



UDYAMBAG-BELAGAVI
KARNATAKA-INDIA
sudhir.epitome@gmail.com.

DRAWING NO.


ESL-SERIES

MATERIAL:

WEIGHT:

F

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:



7

sudhir.epitome@gmail.com